
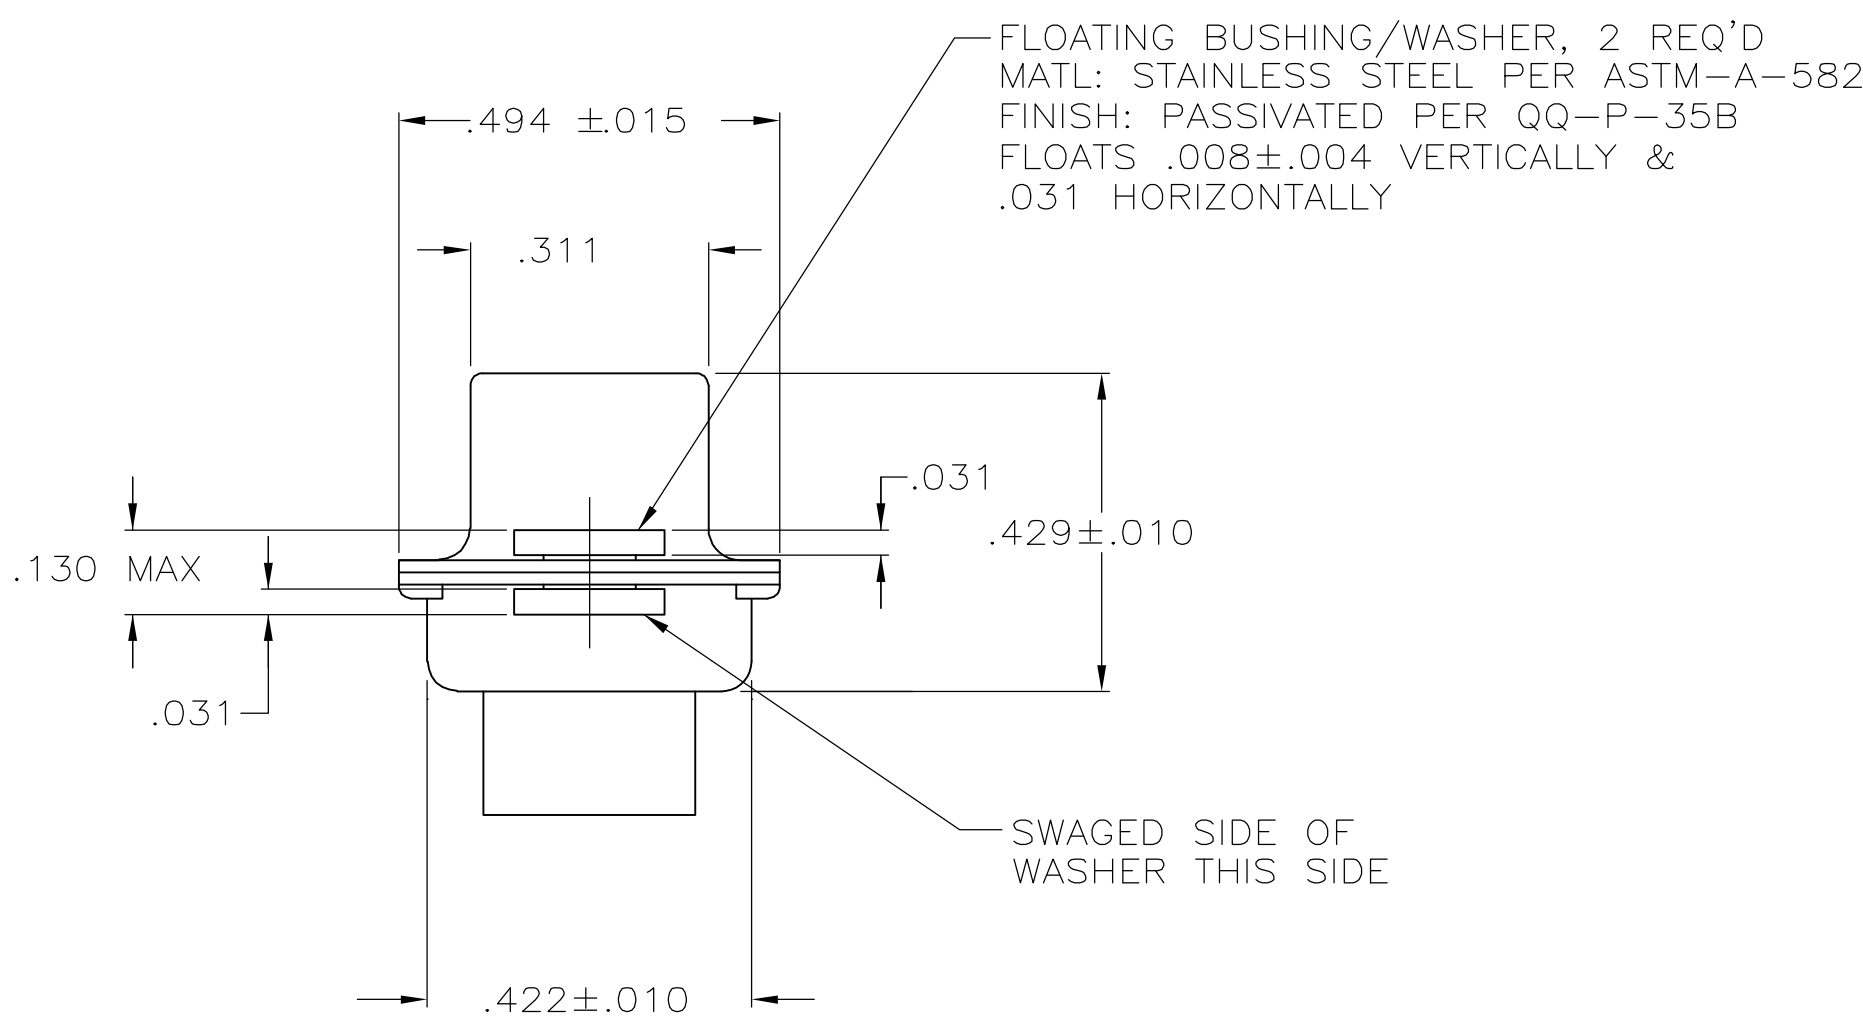
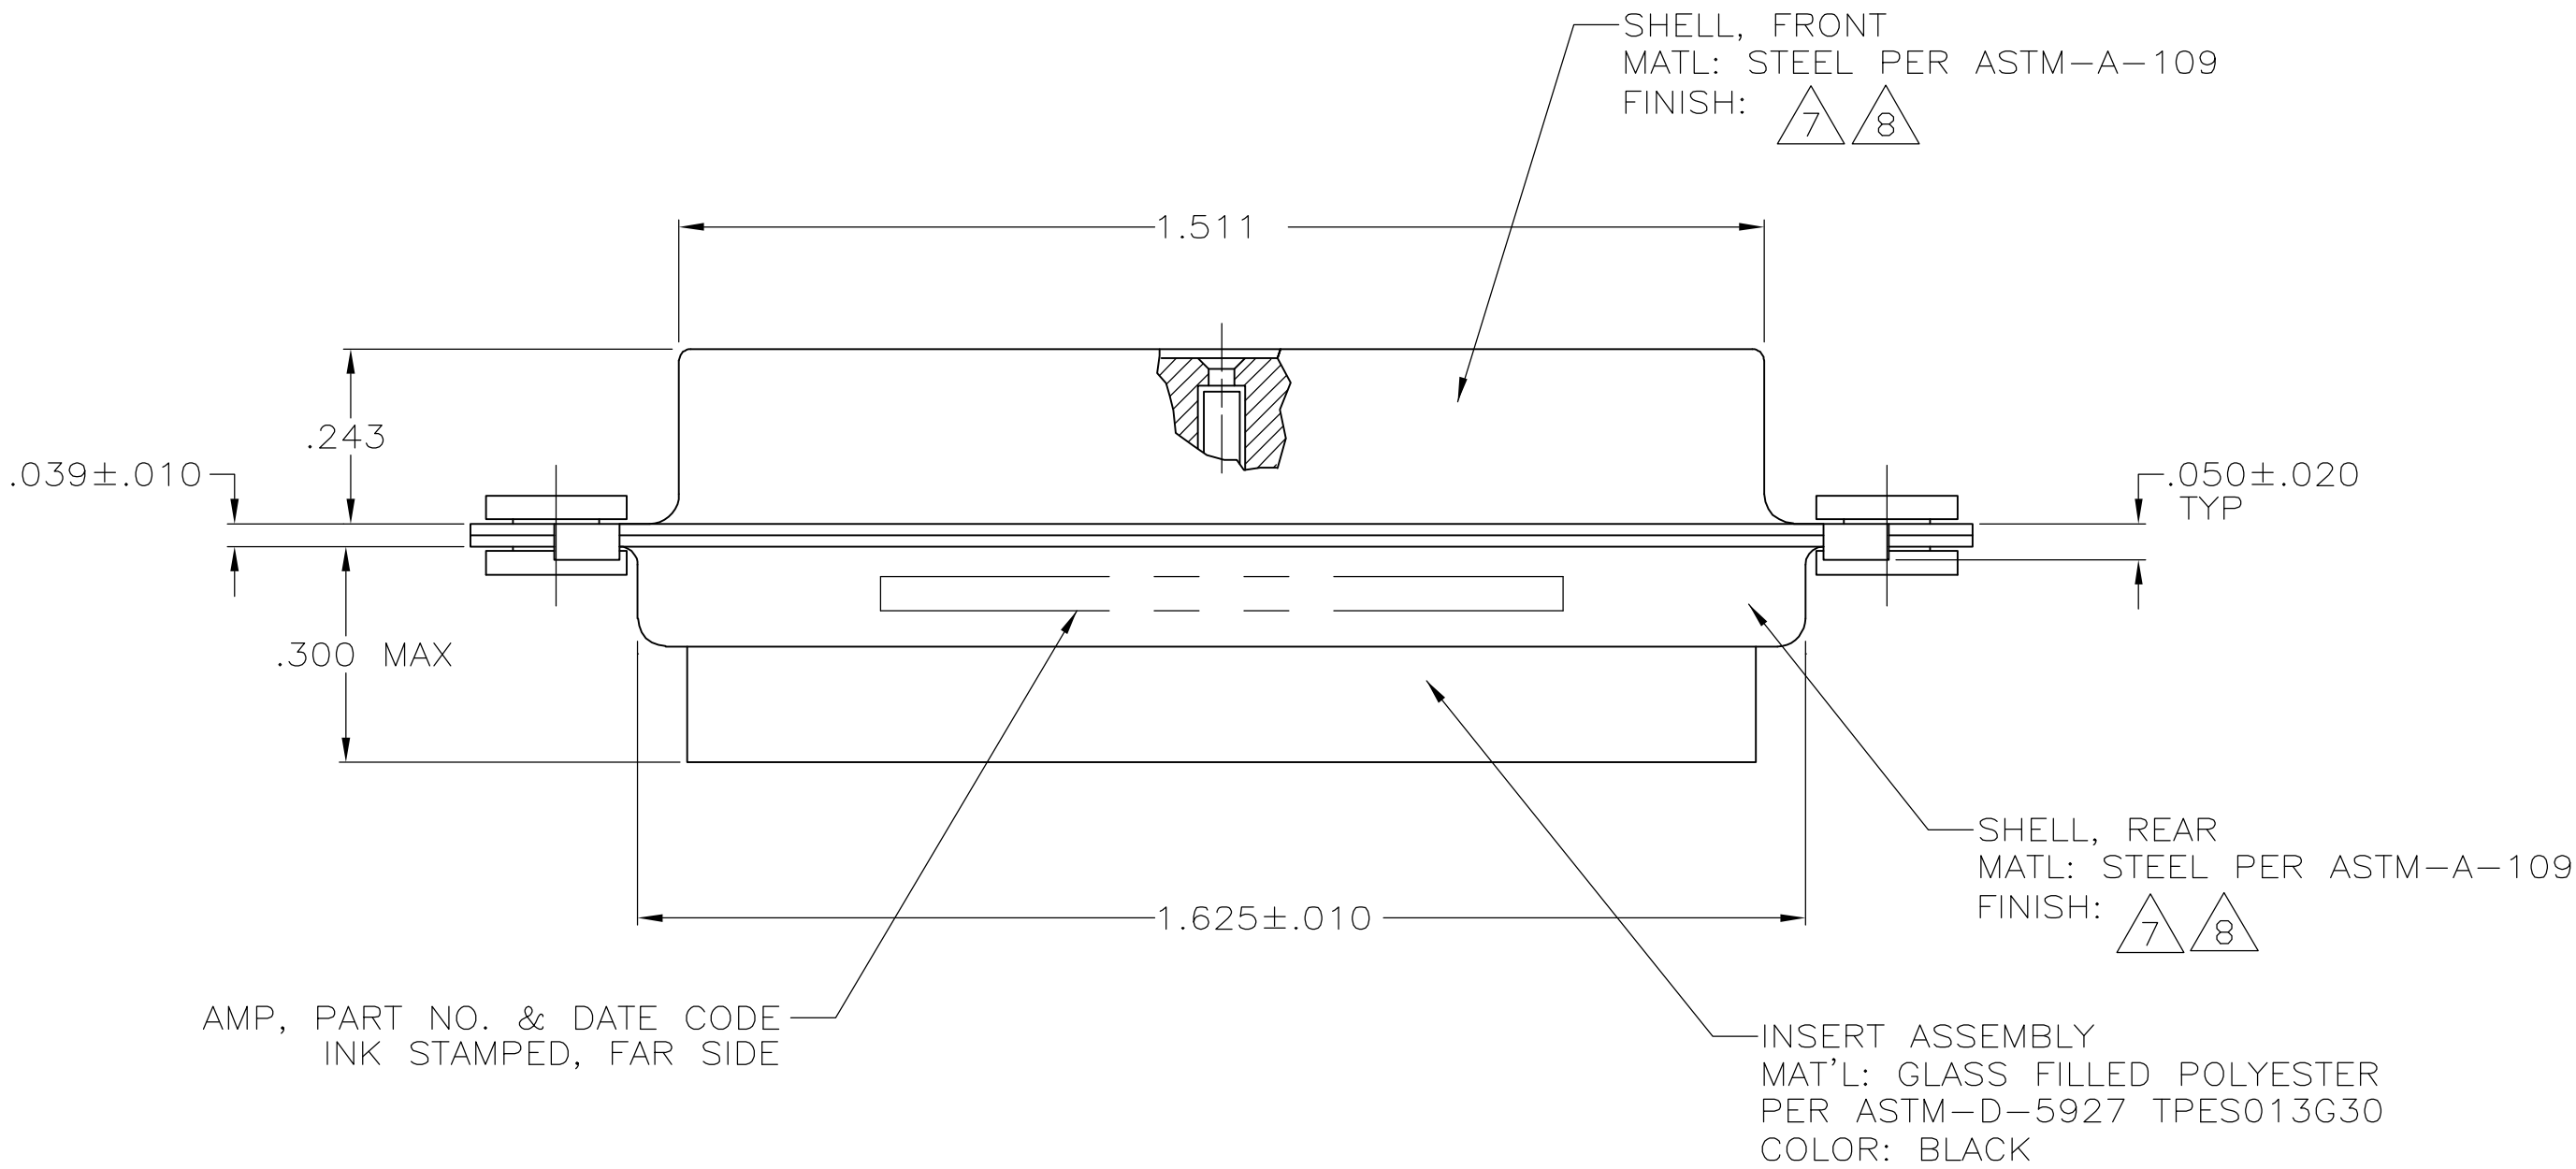


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
DF	DO	H	REV	PER ECO-05-014837	29DEC05	PY DM

1. THIS RECEPTACLE WILL MATE WITH ANY 13C3, SIZE 3 PLUG IN AMPLIMITE SERIES.
2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS RECEPTACLE IS .068 DIA.
3. STAINLESS STEEL RETENTION CLIPS (10) ARE INCLUDED IN INSERT ASSEMBLY.
- △4 CONNECTOR SUPPLIED WITH (11) SIGNAL SOCKET CONTACTS; PACKAGED IN A SEPERATE BAG.
5. USE 3 SIZE 8 POWER OR COAX SOCKET CONTACTS. CONSULT PRODUCT ENGINEERING FOR MORE DETAILS
- △6 UL/CSA DESIGNATION STAMPED IN THIS AREA, OPTIONAL.
- △7 CADMIUM PER QQ-P-416
- △8 ZINC PLATE PER ASTM-B-633, .000200-.000400 THK WITH SUPPLEMENTARY CHROMATE (Cr3+)

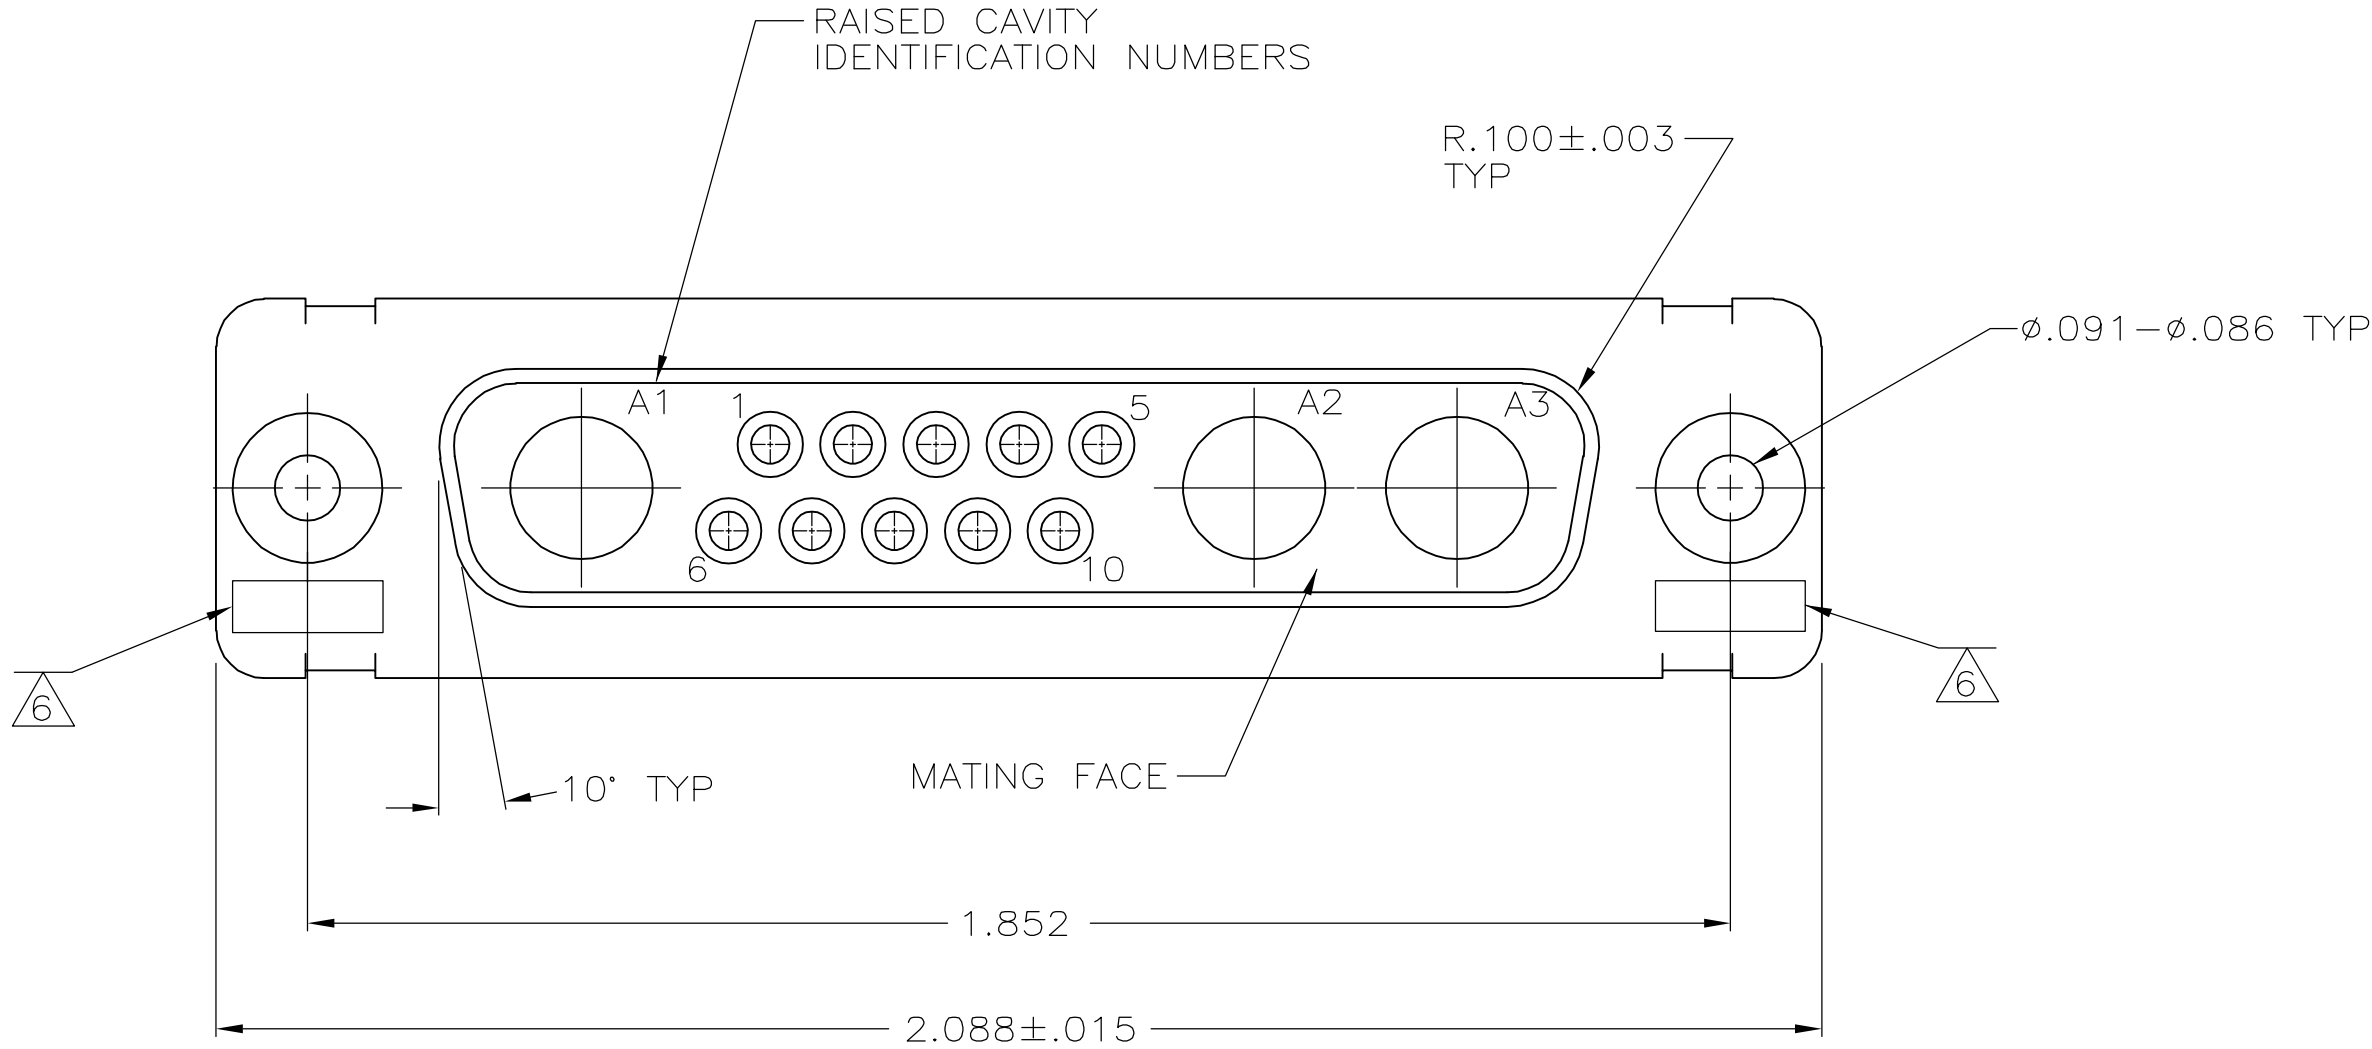

△8	5-212057-2
△7	212057-2
△4 △7	212057-1
REMARKS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 01-FEB-88	tyco <i>Electronics</i>		Tyco Electronics Corporation		
		CHK A.EMADI 03-FEB-88			Harrisburg, Pa 17105-3608		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RECEPTACLE ASSEMBLY AMPLIMITE 13C3, SIZE 3 SERIES 109, COAX MIC W/FLOAT BUSHINGS	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
		APVD A.EMADI 03-FEB-88					
		PRODUCT SPEC					
		APPLICATION SPEC					
		WEIGHT					
		FINISH					
0 PLC ± -		1 PLC ± -				A1 00779	C=212057
2 PLC ± -		3 PLC ± .005					
4 PLC ± -		ANGLES ± - 0°30'					
MATERIAL SEE CALLOUTS		SEE CALLOUTS					
		CUSTOMER DRAWING				SCALE 4:1	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[212057-1](#)