


## 3690 Series General Purpose Extend ers

The 3690 Series general purpose Card Extenders are specifically designed to provide low cost accessibility to 4.5" wide card or 2.73" wide cards.

Some types are provided with high quality, long life receptacles mounted on top of the extender (see table). These receptacles have double action phosphor bronze contacts designed for minimum printed circuit card wear, low insertion force and positive contact with printed circuit board contacts. Appropriate polarizing keys are supplied with the receptacle. Contact fingers at the other end of extender card are gold plated. Other types are available without receptacle to enable user to install any receptacle with the same contact spacing as the centers of the copper strips of the extender board (see table). These also make useful experimental Plugbords.

Probe hooks may be attached to tips on receptacles. Figure 1 below shows proper use of the card extenders to gain access to operational Plugbord for testing.

| Contacts:                   | Ni/Gold                    |  |  |  |  |
|-----------------------------|----------------------------|--|--|--|--|
| Current Rating:             | 5 amps at 10° f. rise      |  |  |  |  |
| Voltage Rating:             | 200 VDC or AC Peak         |  |  |  |  |
| Material:                   | FR4 Epoxy Glass, 2 oz. Cu. |  |  |  |  |
| <b>Receptacle Contacts:</b> | NI/Gold Plated             |  |  |  |  |
| -                           |                            |  |  |  |  |

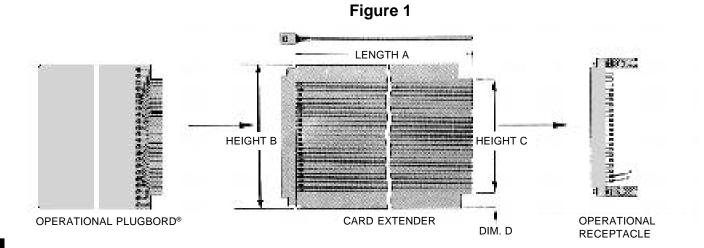

| Part No. | Length<br>A | Height<br>B | Tongue<br>Height C | Dim.<br>D | Contact Strips          | Width Of<br>Strips | Receptacle<br>Supplied | Capacitance       |                  |
|----------|-------------|-------------|--------------------|-----------|-------------------------|--------------------|------------------------|-------------------|------------------|
|          |             |             |                    |           |                         |                    |                        | Between<br>Strips | Front<br>To Back |
| 3690     | 6.5"        | 4.5"        | 3.6"               | .46"      | 22 ea. side, .156" Ctrs | .092"              | R644                   | 9 pf              | 4.5 pf           |
| 3690-2   | 11.0"       | 4.5"        | 3.7"               | .40"      | 36 ea. side, .10" Ctrs. | .062"              | R636                   | 18 pf             | 6.3 pf           |
| 3690-3   | 11.0"       | 4.5"        | 3.7"               | .40"      | 36 ea. side, .10" Ctrs. | .062"              | None                   | 18 pf             | 6.3 pf           |
| 3690-4   | 7.5"        | 4.5"        | 3.7"               | .40"      | 36 ea. side, .10" Ctrs. | .062"              | R636                   | 12 pf             | 4.3 pf           |
| 3690-6   | 11.0"       | 4.5"        | 3.6"               | .46"      | 22 ea. side, .156" Ctrs | .092"              | R644                   | 15 pf             | 8.0 pf           |
| 3690-8   | 5.5"        | 2.73"       | 2.3"               | .22"      | 22 ea. side, .10" Ctrs. | .062"              | R644-2                 | 9 pf              | 3.2 pf           |



## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vector: 3690 3690-8 3690-6