

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
J			O	RELEASED	FJA0-0576-04	24AUG04	YM	HY
			A	REIVED	ECR-10-005857	26APR10	SF	KB

D

D

C


C

B






B

A

A

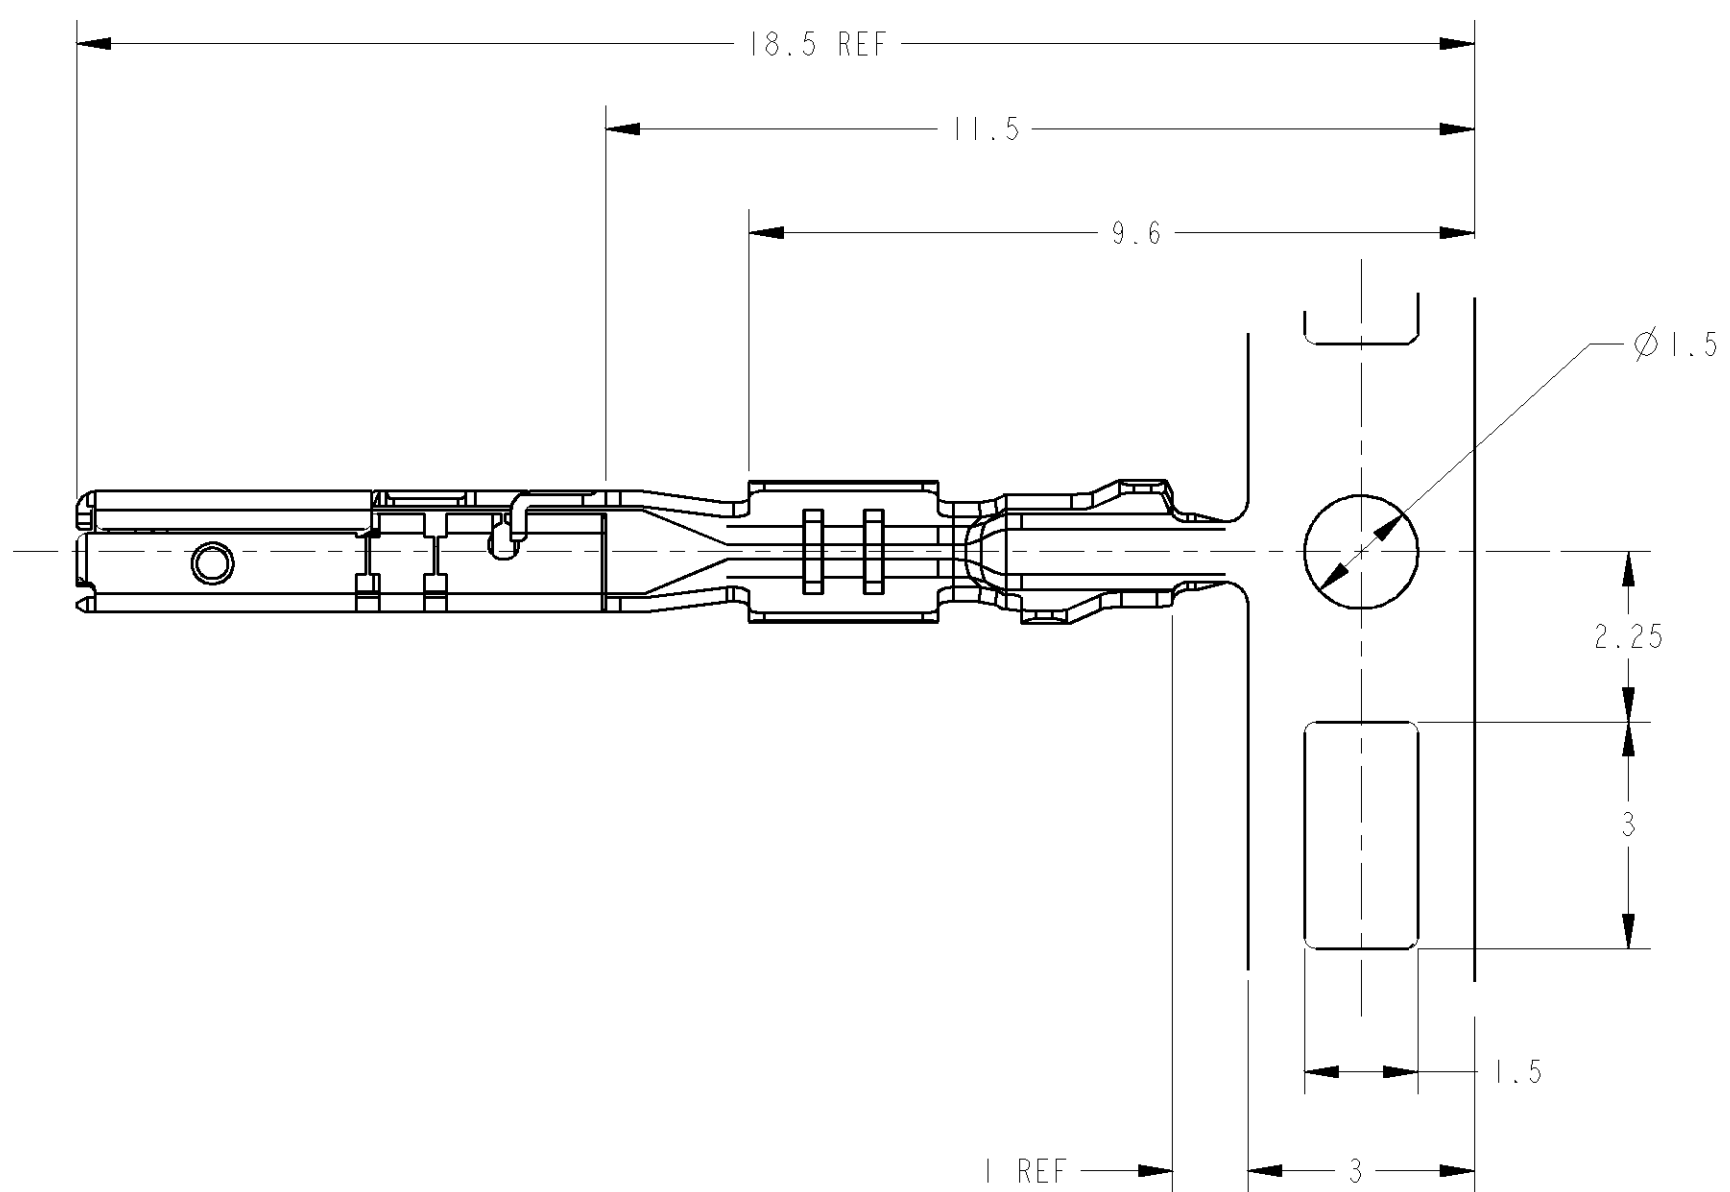

1. 適用電線;
CAVS/CAVUS/CHFUS 0.22mm²
2. 圧着作業については、以下の規格を参照すること
取付適用規格; 114-5329
3. アプリケータ送りピッチ; 8mm
- △ 寸法は識別用金めっき範囲を表す
- △ 接触部; 金めっき、1/11ル部: すずめっき
1. APPLICABLE WIRE RANGE ;
CAVS/CAVUS/CHFUS 0.22mm²
2. MUST BE REFERRED TO THE FOLLOWING
DOCUMENTS FOR CRIMPING OPERATION
APPLICATION SPEC ; 114-5329
3. APPLICATOR FEED; 8mm
- △. GOLD PLATED AREA FOR DISCRIMINATION
- △. CONTACT POINT; GOLD PLATING
BARREL; TIN PLATING

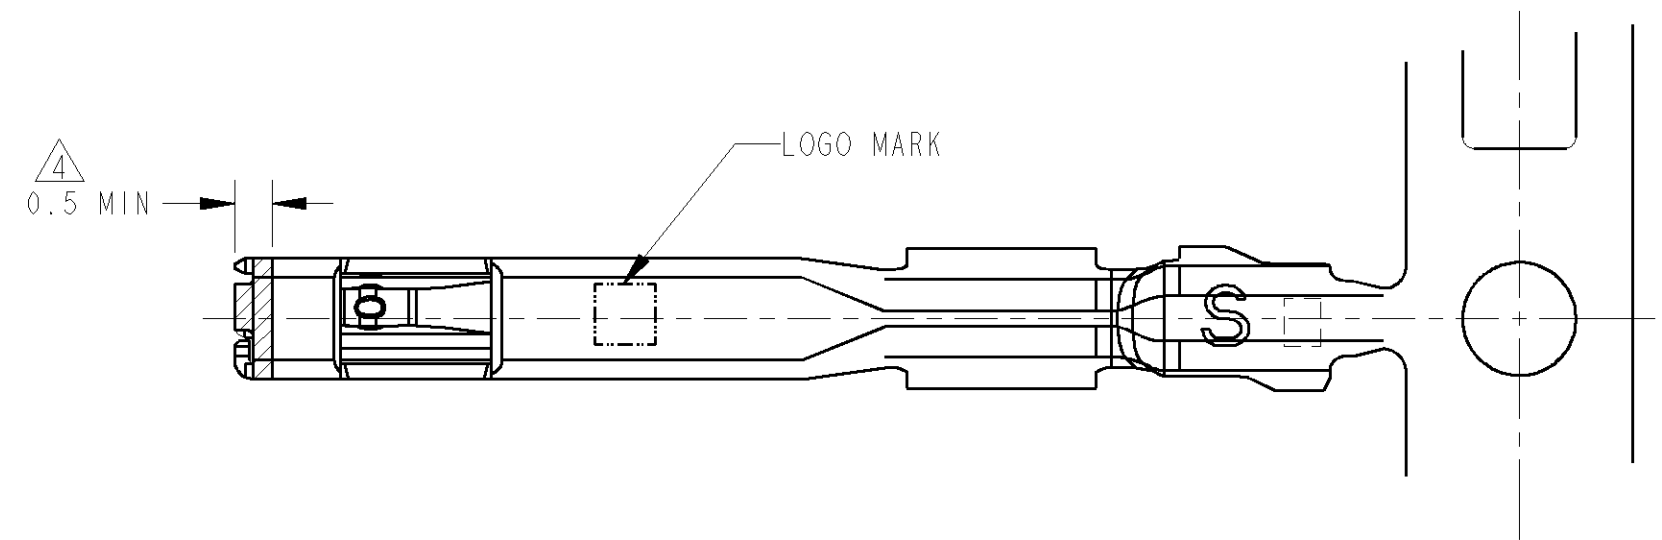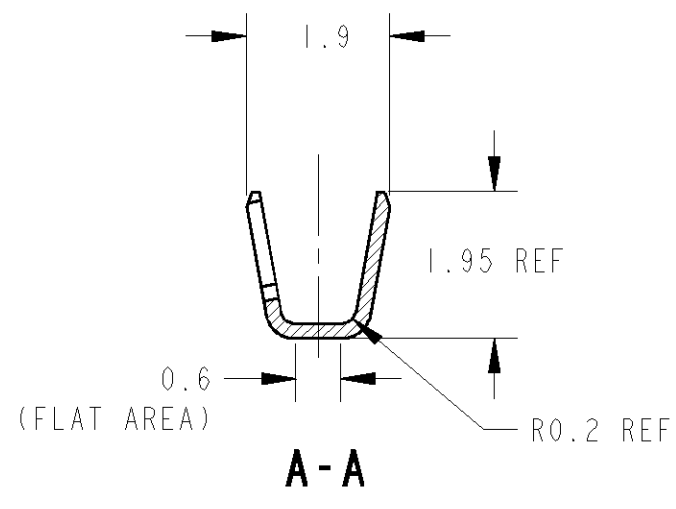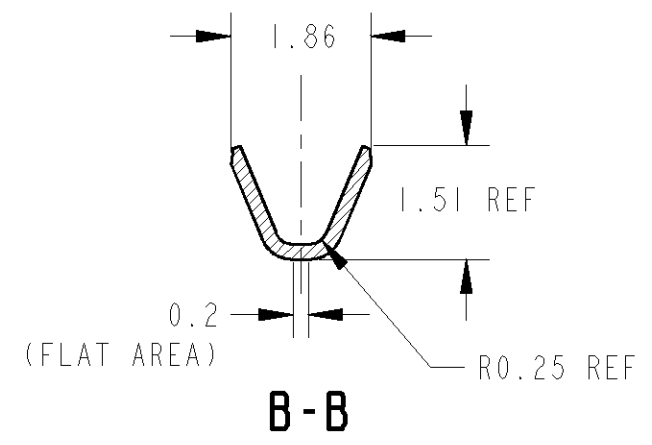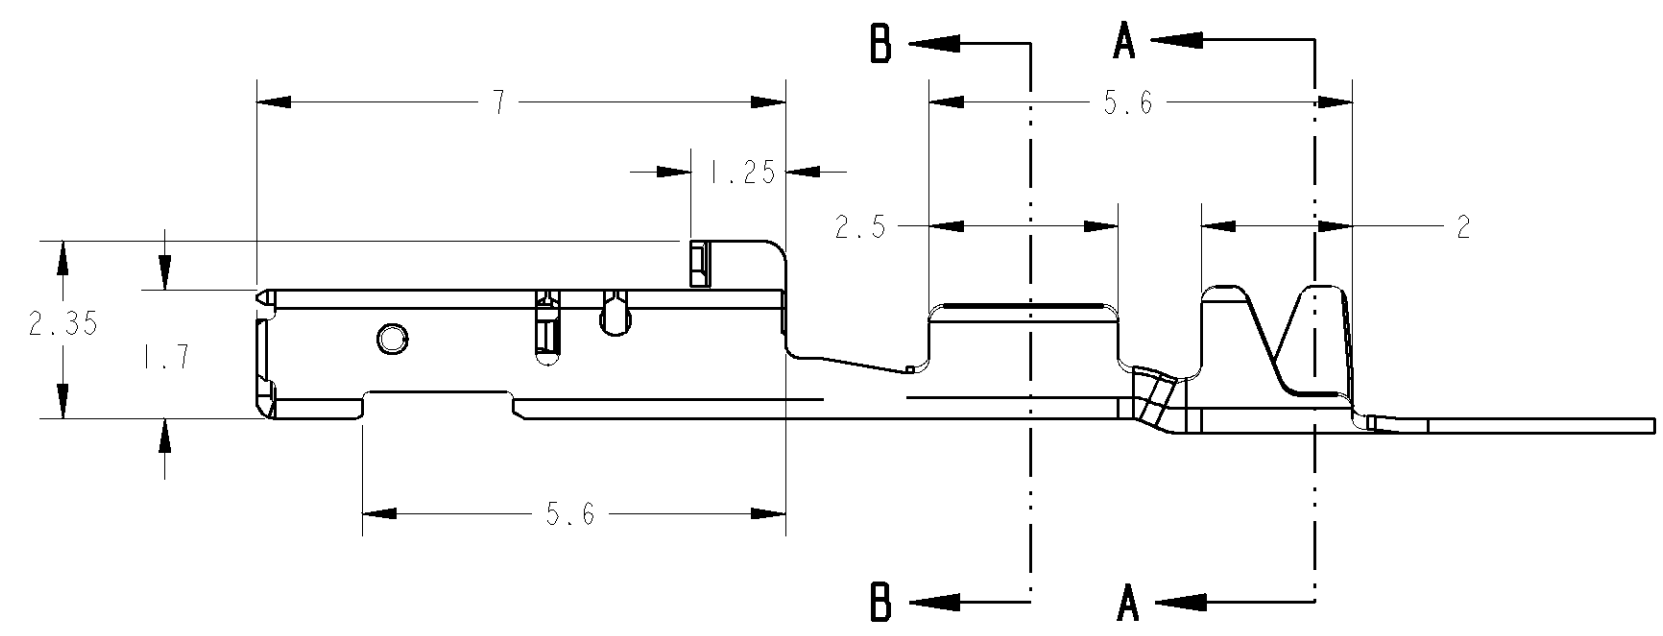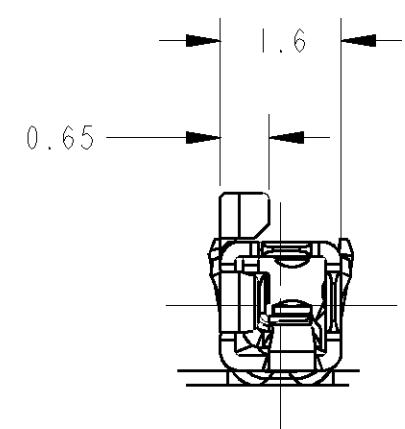

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.			DWN Y. MITO	24AUG04	4 5 SELECTIVE GOLD, TIN		1674936-2										
			CHK H. YAMAGAMI	24AUG04			PRE-TIN		1674936-1								
			APVD S. ISOHATA	24AUG04			FINISH		TYCO PART NO.								
			PRODUCT SPEC				Tyco Electronics Corporation Kawasaki, Japan										
DIMENSIONS: 単位: 純 mm			TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 名称												
			一般公差 ±0.3		0.64111 SERIES CONNECTOR RECEPTACLE CONTACT (S)												
			0-PLC ±														
			1-PLC ±0.5														
			2-PLC ±0.13														
			3-PLC ±0.013		SIZE												
			4-PLC ±0.0001		CAGE CODE												
			ANGLES ±3°00'		DRAWING NO												
MATERIAL 材料			FINISH 仕上		RESTRICTED TO												
Cu Alloy			SEE TABLE		A2 00779 C-1674936												
			CUSTOMER DRAWING		SCALE 10.1												
					SHEET 1 OF 1												
					REV A												

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1674936-2](#)