

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0755565000

Status:


Active

Overview:

EXTreme PowerMass High-Current Connectors

Description:

EXTreme PowerMass 3.18mm Pitch, 150A Module, 1 Circuit, Right-Angle Plug, Long Blade, Tail Length 3.06mm

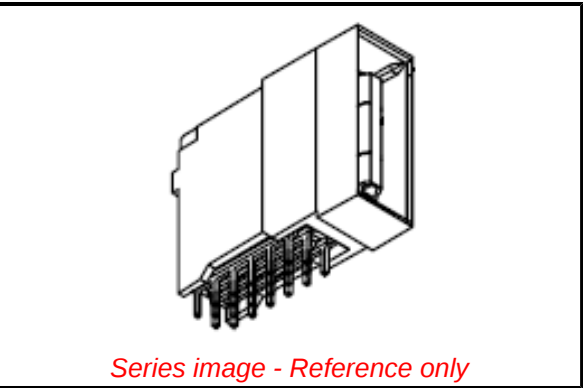

Series image - Reference only

Documents:

3D Model

Drawing (PDF)

Application Specification AS-75541-100-001 (PDF)

Packaging Specification PK-46081-100-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	75556
Application	Board-to-Board, Power
Comments	150A Module Tin Tails
Overview	EXTreme PowerMass High-Current Connectors
Product Name	EXTreme PowerMass
UPC	800756674261
Physical	
(p)ower-(s)ignal Configuration	1p - 0s
Breakaway	No
Circuits (Loaded)	1
Circuits (maximum)	1
Color - Resin	Black
Durability (mating cycles max)	50
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	No
Material - Metal	Steel
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	17.000/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	3.06mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	2.40mm
Packaging Type	Tray
Pitch - Mating Interface	N/A
Pitch - Termination Interface	1.60mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -

ED/61/2018 (27 June

2018)

Halogen-Free

Status

Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

75556 Series

Mates With

75542-5000 EXTreme PowerMass

Receptacles, 75542-5001 EXTreme

PowerMass Receptacles, 454815000

EXTreme PowerMass Receptacles

Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	150.0A
Voltage - Maximum	600V
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-75541-100-001
Packaging Specification	PK-46081-100-001
Sales Drawing	SD-75556-100

This document was generated on 09/28/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

75556-5000