


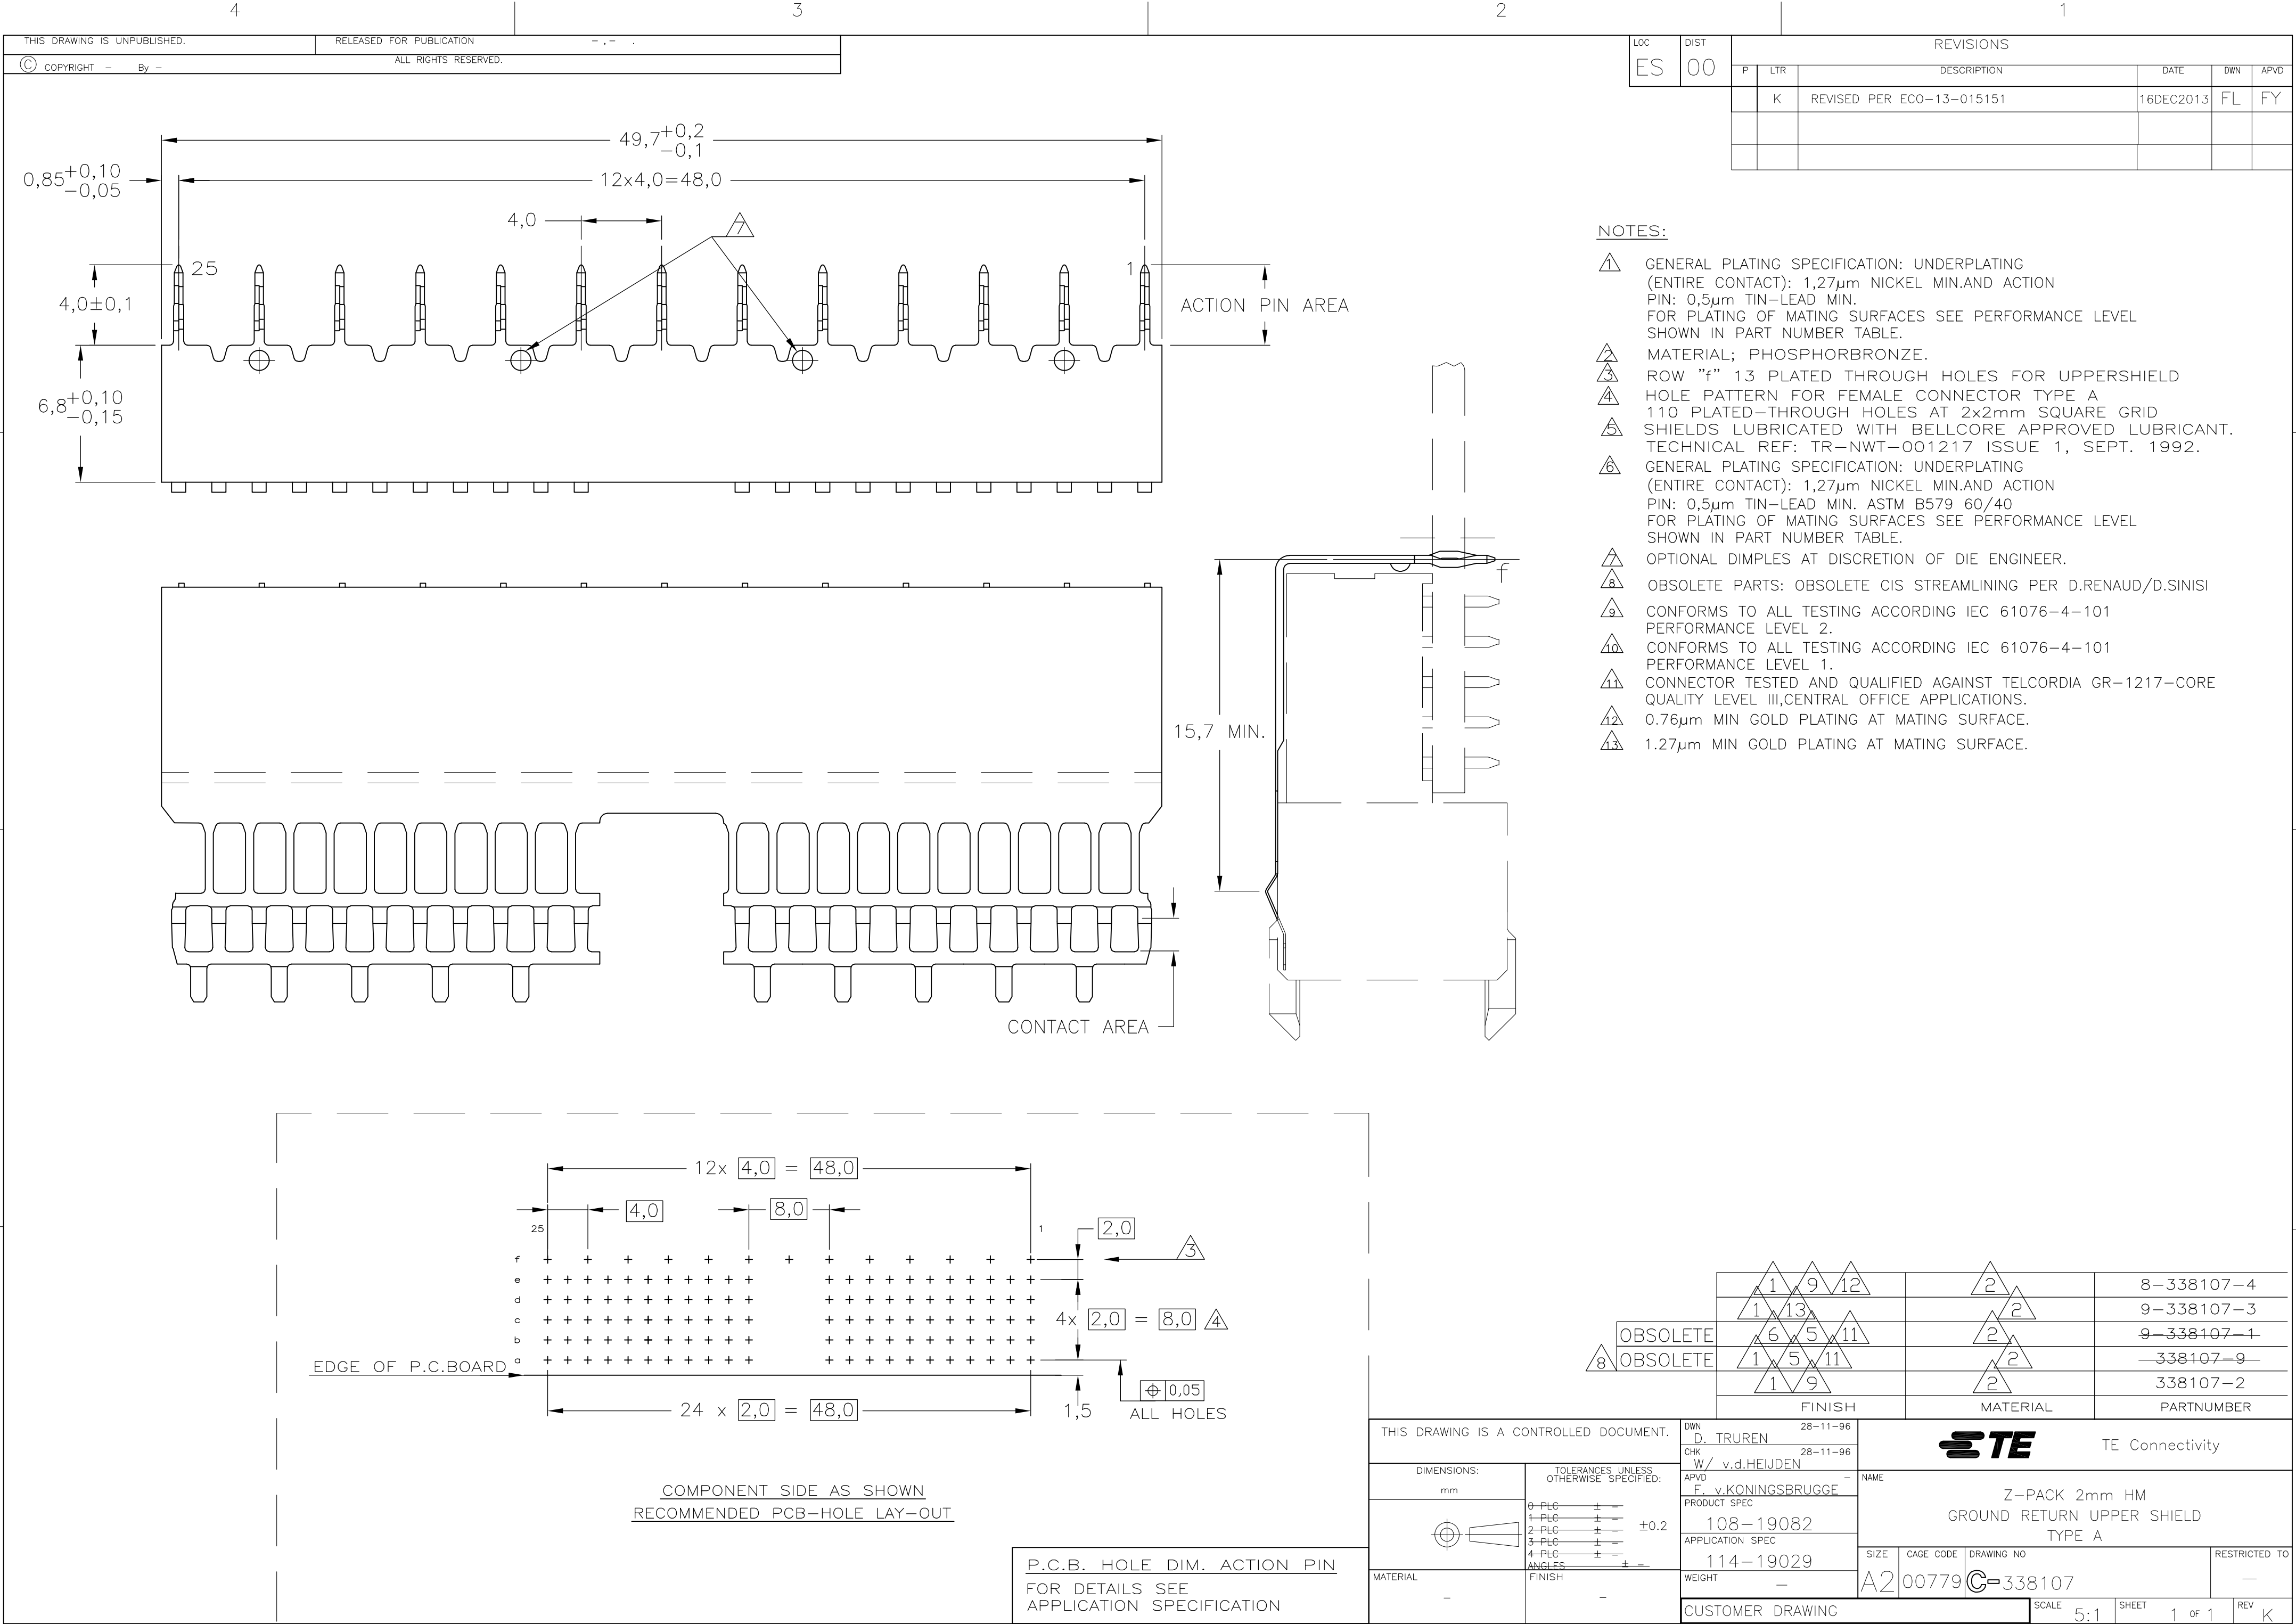

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00		K	REVISED PER ECO-13-015151	16DEC2013	FL

- NOTES:
- GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN-LEAD MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
 - MATERIAL; PHOSPHORBRONZE.
 - ROW "f" 13 PLATED THROUGH HOLES FOR UPPERSHIELD
 - HOLE PATTERN FOR FEMALE CONNECTOR TYPE A 110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
 - GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN-LEAD MIN. ASTM B579 60/40 FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
 - OPTIONAL DIMPLES AT DISCRETION OF DIE ENGINEER.
 - OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
 - CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
 - 0.76µm MIN GOLD PLATING AT MATING SURFACE.
 - 1.27µm MIN GOLD PLATING AT MATING SURFACE.

OBSOLETE OBSOLETE	1 9 12	2	8-338107-4
	1 13	2	9-338107-3
	6 5 11	2	9-338107-1
	1 5 11	2	-338107-9-
	1 9	2	338107-2
FINISH		MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN 28-11-96	 TE Connectivity				
		CHK W/ v.d.HEIJDEN 28-11-96					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD F. v.KONINGSBRUGGE PRODUCT SPEC	NAME Z-PACK 2mm HM GROUND RETURN UPPER SHIELD TYPE A				
	0 PLG ± 1 PLG ± 2 PLG ± 3 PLG ± 4 PLG ± ANGLES ± ±0.2	108-19082					
		APPLICATION SPEC 114-19029	SIZE A2	CAGE CODE 00779	DRAWING NO C=338107	RESTRICTED TO —	
MATERIAL —	FINISH —	WEIGHT —					
CUSTOMER DRAWING			SCALE 5:1	SHEET 1 of 1	REV K		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9-338107-3](#)