
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube		
Plating	Electro-Tin 1/0 AWG Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric		
Wire Size			
Wire Type			
Wire Strip Length	1.0 in.		
Stud Size	1/4 in.		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90°C		
C.S.A Certified Wire Connector	Yes		
Panduit Color Code on Barrel	PINK		
Panduit Die Index No. on Barrel	P42		
Alternate Industry Die Index No. () on Barrel	(12)		

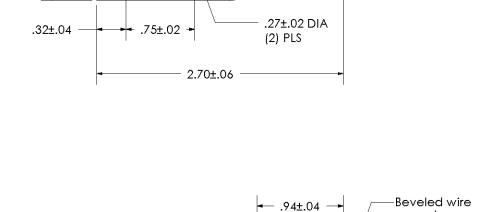

.38 R Ref

Color coded barrel markings

entry

.39±.01 .52±.01







						CORP. TINLEY PARK, ILLINOI
						LCD1/0-14B-X Copper Lug - Two-Hole, Standard Barrel
00	12/02	SAB	DRL	RELEASED	10343	Copper Lug - Two-Hole, Standard Barret
REV	DATE	BY	СНК	DESCRIPTION	ECN	I SCALE N/A DRAWING NO / CAD FILE LCD1_0-14B-CUST

.12±.01

Wire inspection window-

.76±.04