

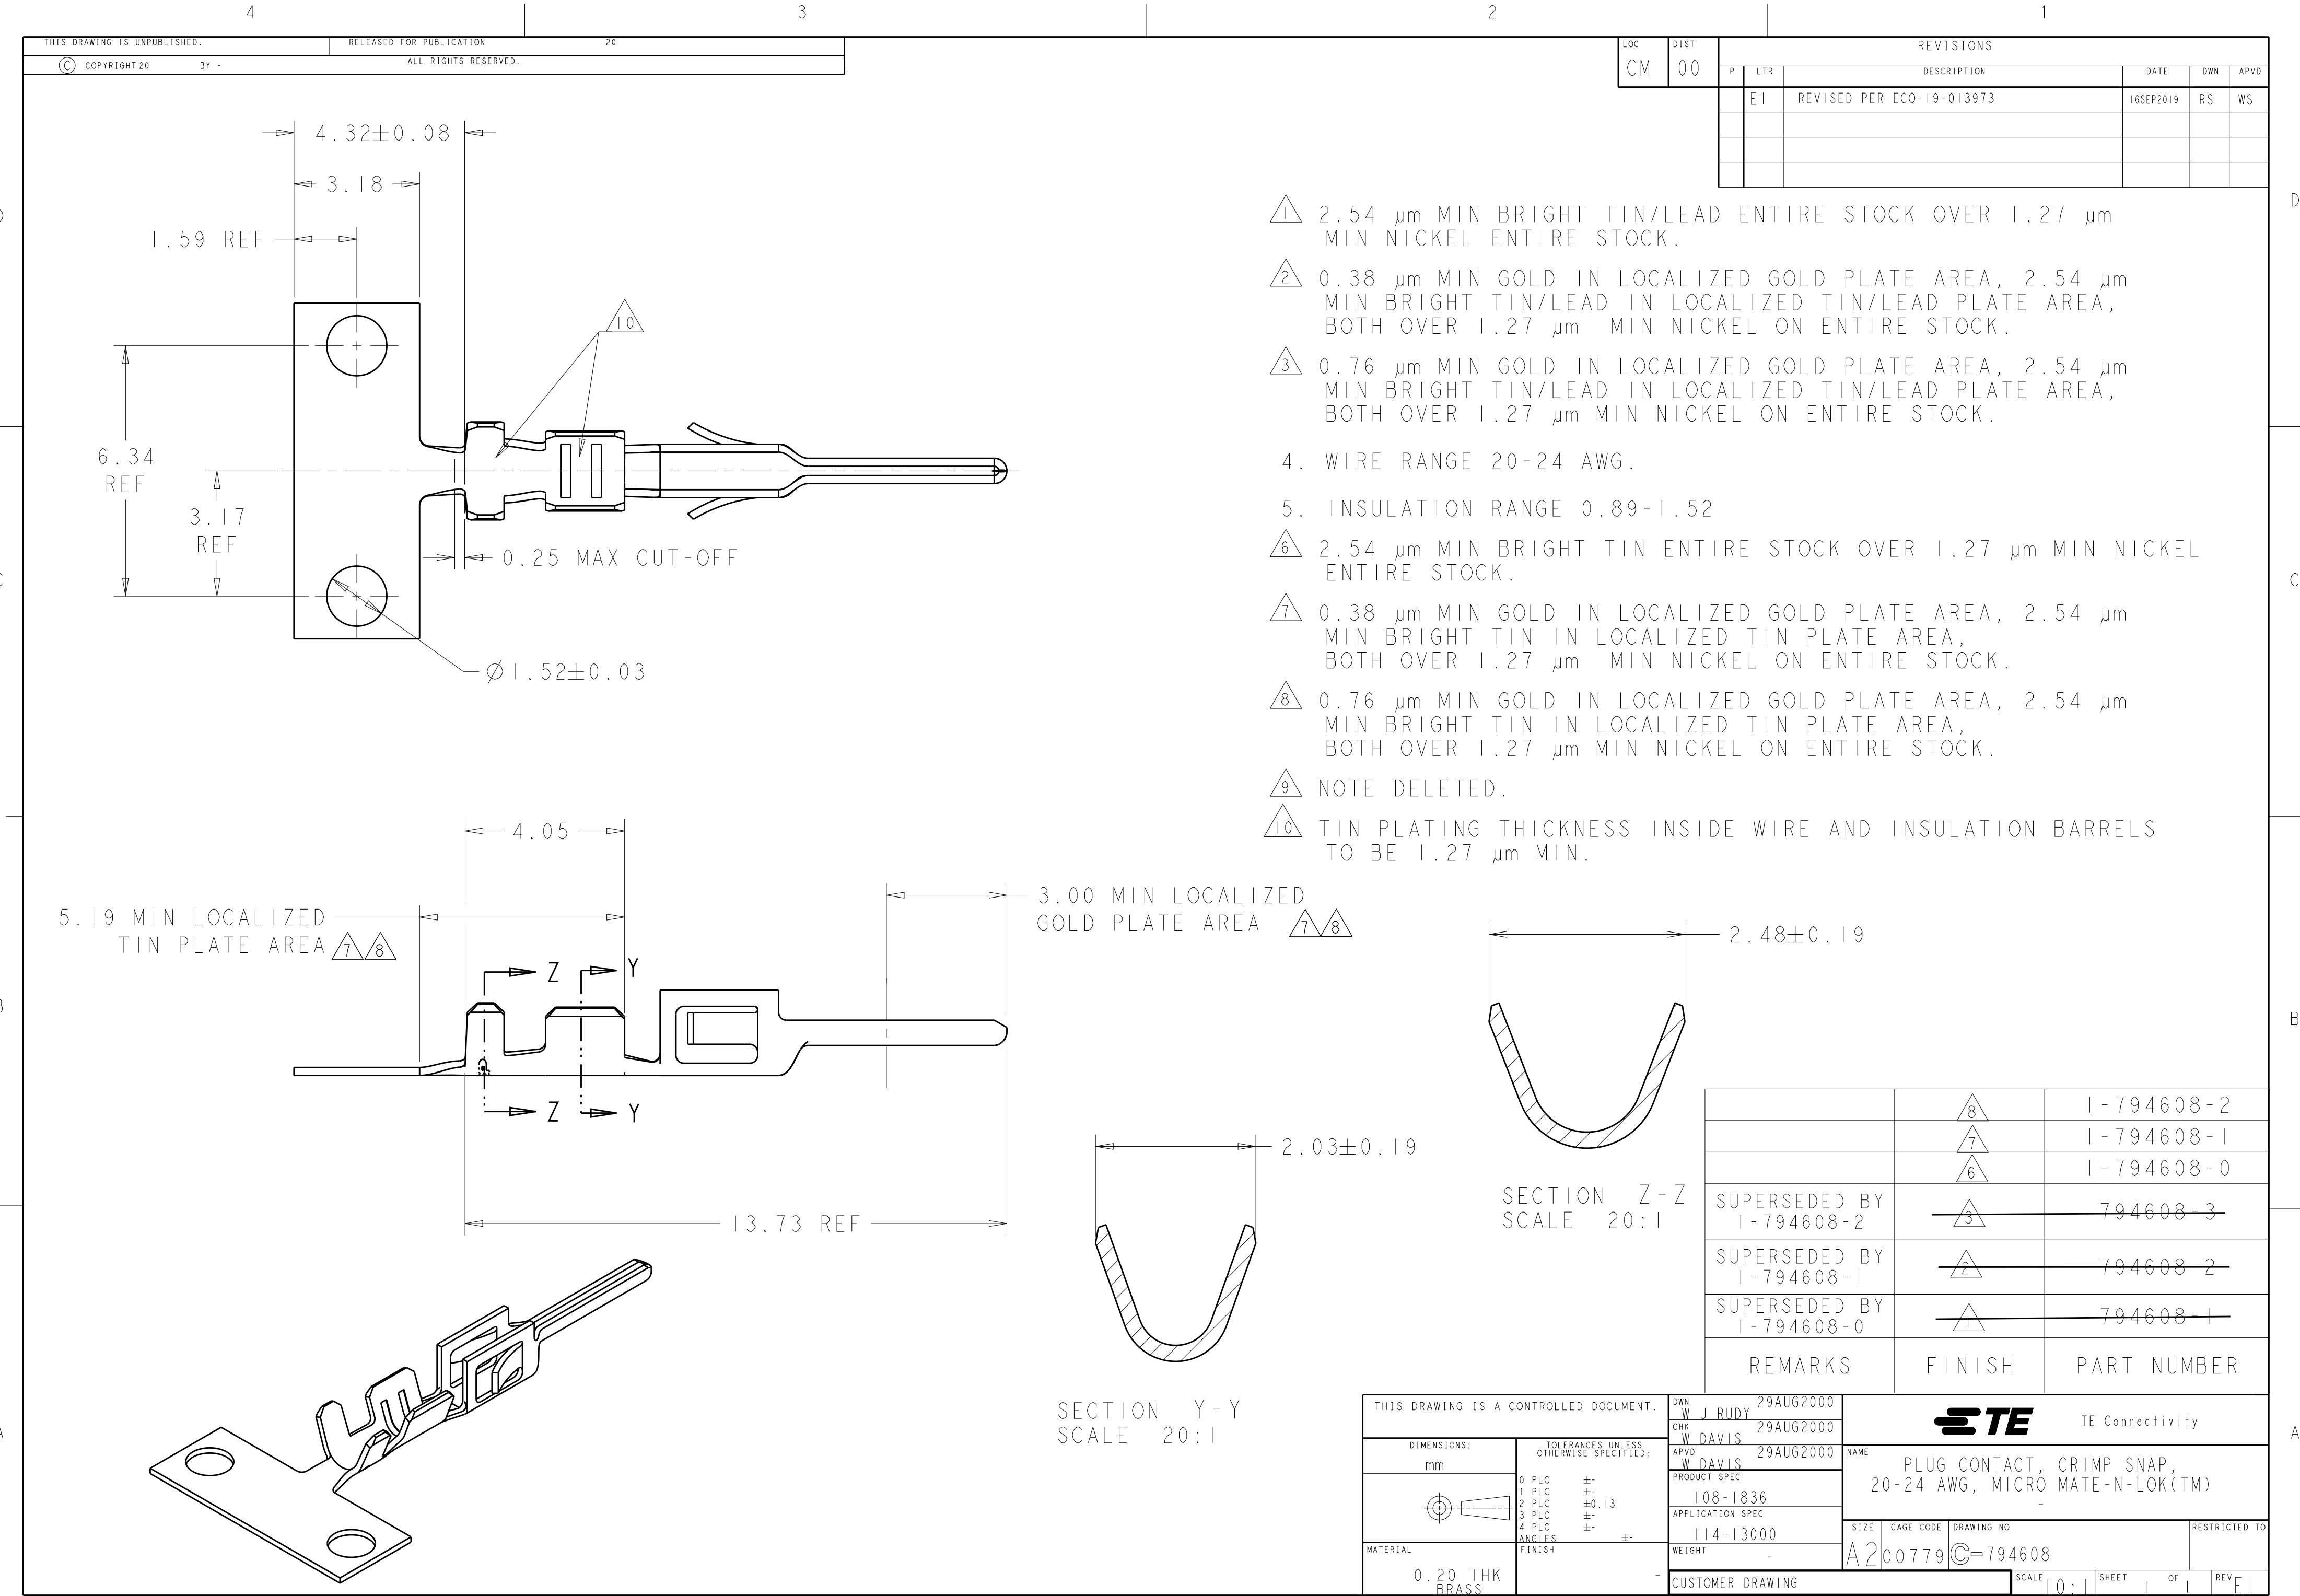


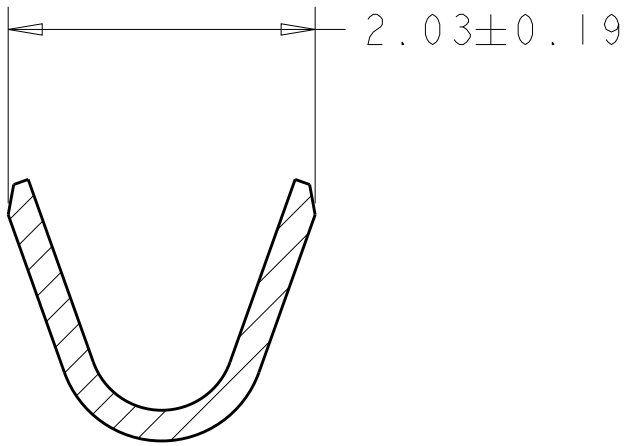

- 1 2.54 μm MIN BRIGHT TIN/LEAD ENTIRE STOCK OVER 1.27 μm MIN NICKEL ENTIRE STOCK.
- 2 0.38 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.54 μm MIN BRIGHT TIN/LEAD IN LOCALIZED TIN/LEAD PLATE AREA, BOTH OVER 1.27 μm MIN NICKEL ON ENTIRE STOCK.
- 3 0.76 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.54 μm MIN BRIGHT TIN/LEAD IN LOCALIZED TIN/LEAD PLATE AREA, BOTH OVER 1.27 μm MIN NICKEL ON ENTIRE STOCK.
4. WIRE RANGE 20-24 AWG.
5. INSULATION RANGE 0.89-1.52
- 6 2.54 μm MIN BRIGHT TIN ENTIRE STOCK OVER 1.27 μm MIN NICKEL ENTIRE STOCK.
- 7 0.38 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.54 μm MIN BRIGHT TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27 μm MIN NICKEL ON ENTIRE STOCK.
- 8 0.76 μm MIN GOLD IN LOCALIZED GOLD PLATE AREA, 2.54 μm MIN BRIGHT TIN IN LOCALIZED TIN PLATE AREA, BOTH OVER 1.27 μm MIN NICKEL ON ENTIRE STOCK.
- 9 NOTE DELETED.
- 10 TIN PLATING THICKNESS INSIDE WIRE AND INSULATION BARRELS TO BE 1.27 μm MIN.

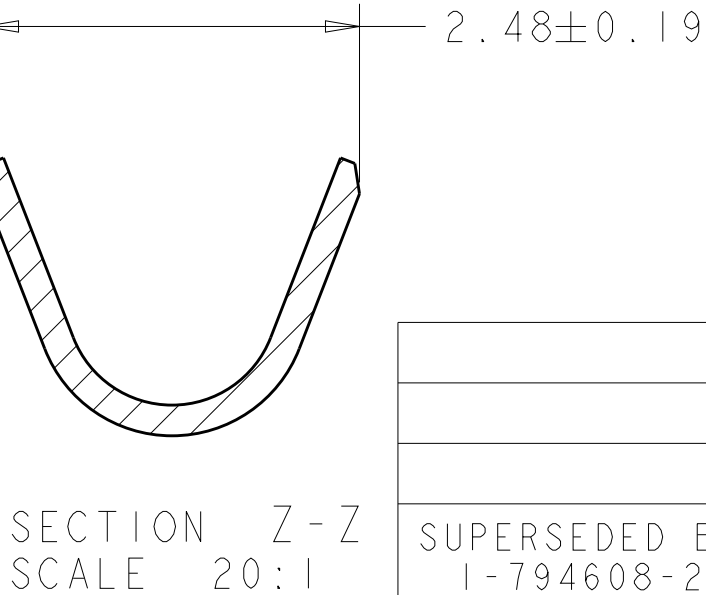

	8	1-794608-2
	7	1-794608-1
	6	1-794608-0
SUPERSEDED BY 1-794608-2	3	794608-3
SUPERSEDED BY 1-794608-1	2	794608-2
SUPERSEDED BY 1-794608-0	1	794608-1
REMARKS	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN W. J. RUDY 29AUG2000	 TE Connectivity			
DIMENSIONS: mm		CHK W. DAVIS 29AUG2000				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD W. DAVIS 29AUG2000	NAME PLUG CONTACT, CRIMP SNAP, 20-24 AWG, MICRO MATE-N-LOK(TM)			
0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-1836 APPLICATION SPEC 114-13000 WEIGHT -	SIZE A200779			
0.20 THK BRASS		CUSTOMER DRAWING	SCALE 10:1			
			SHEET 1 OF 1			
			REV E1			