


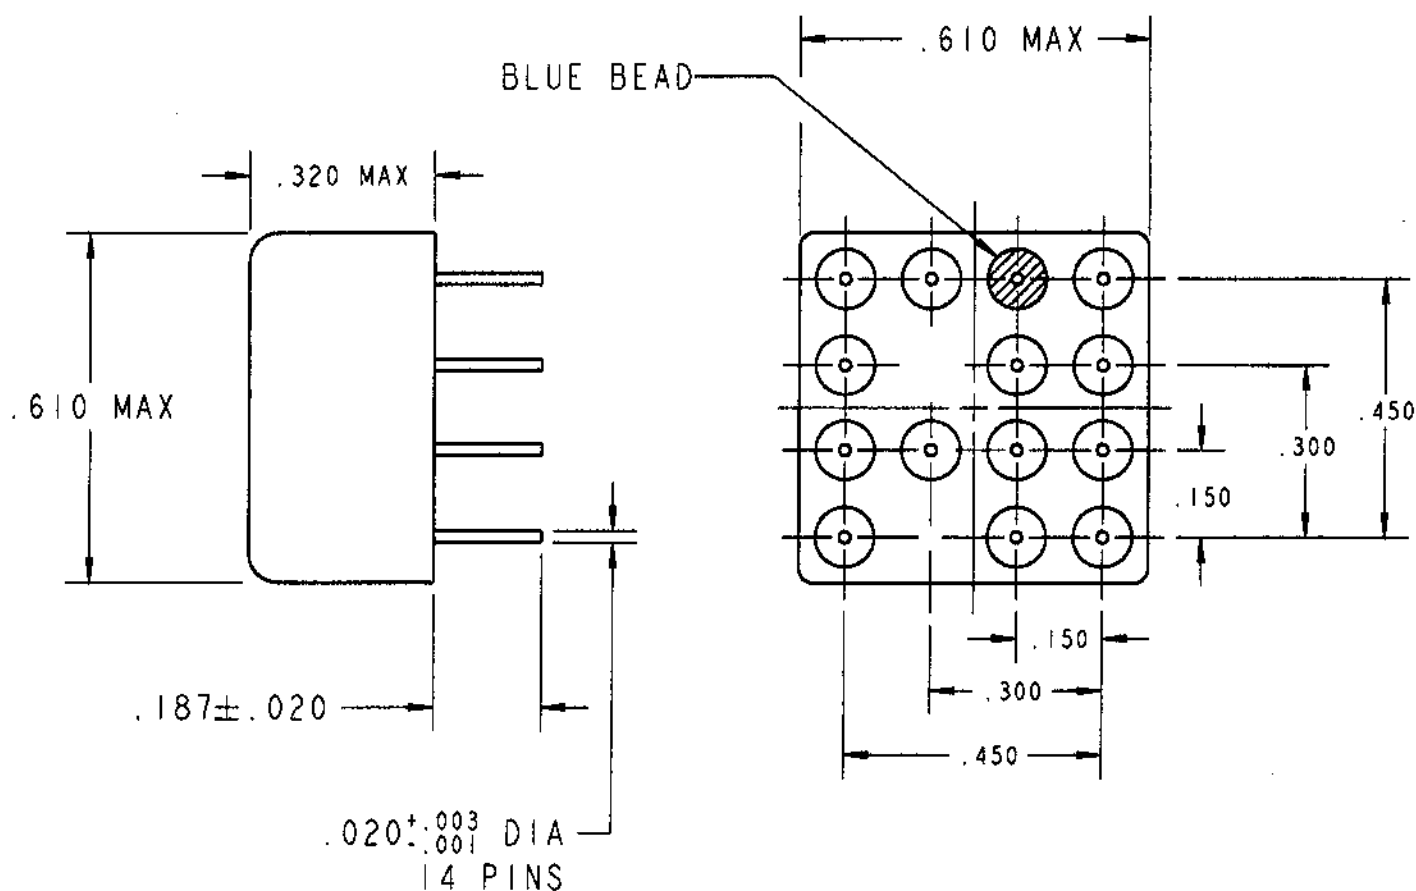


REV. 0

DCO 143197

COIL: @ 25°C
 RESISTANCE 115 OHMS ±10%
 NOMINAL VOLTAGE 12.0 VDC
 MUST OPERATE 5.4 VDC
 MUST RELEASE 3.2 VDC MAX. 0.6 VDC MIN

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C
 NOTES: OPERATE 4 MS MAX.
 RELEASE 6 MS MAX.
 CONTACT STABILIZATION 2.5 MS MAX

CUSTOMER DATA SHEET

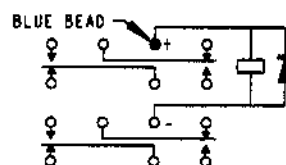

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 100,000 OPERATIONS

DR. ASB 9/06/01 CK. TIG 9-6-01

CII Technologies
 advanced control electronic solutions

CUST. OPL
 CUST. NO. M39016/53-006M REV.

"3SBH" RELAY

3SBH1225A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SBH1225A2](#)