


- PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 108-11-3.
- 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

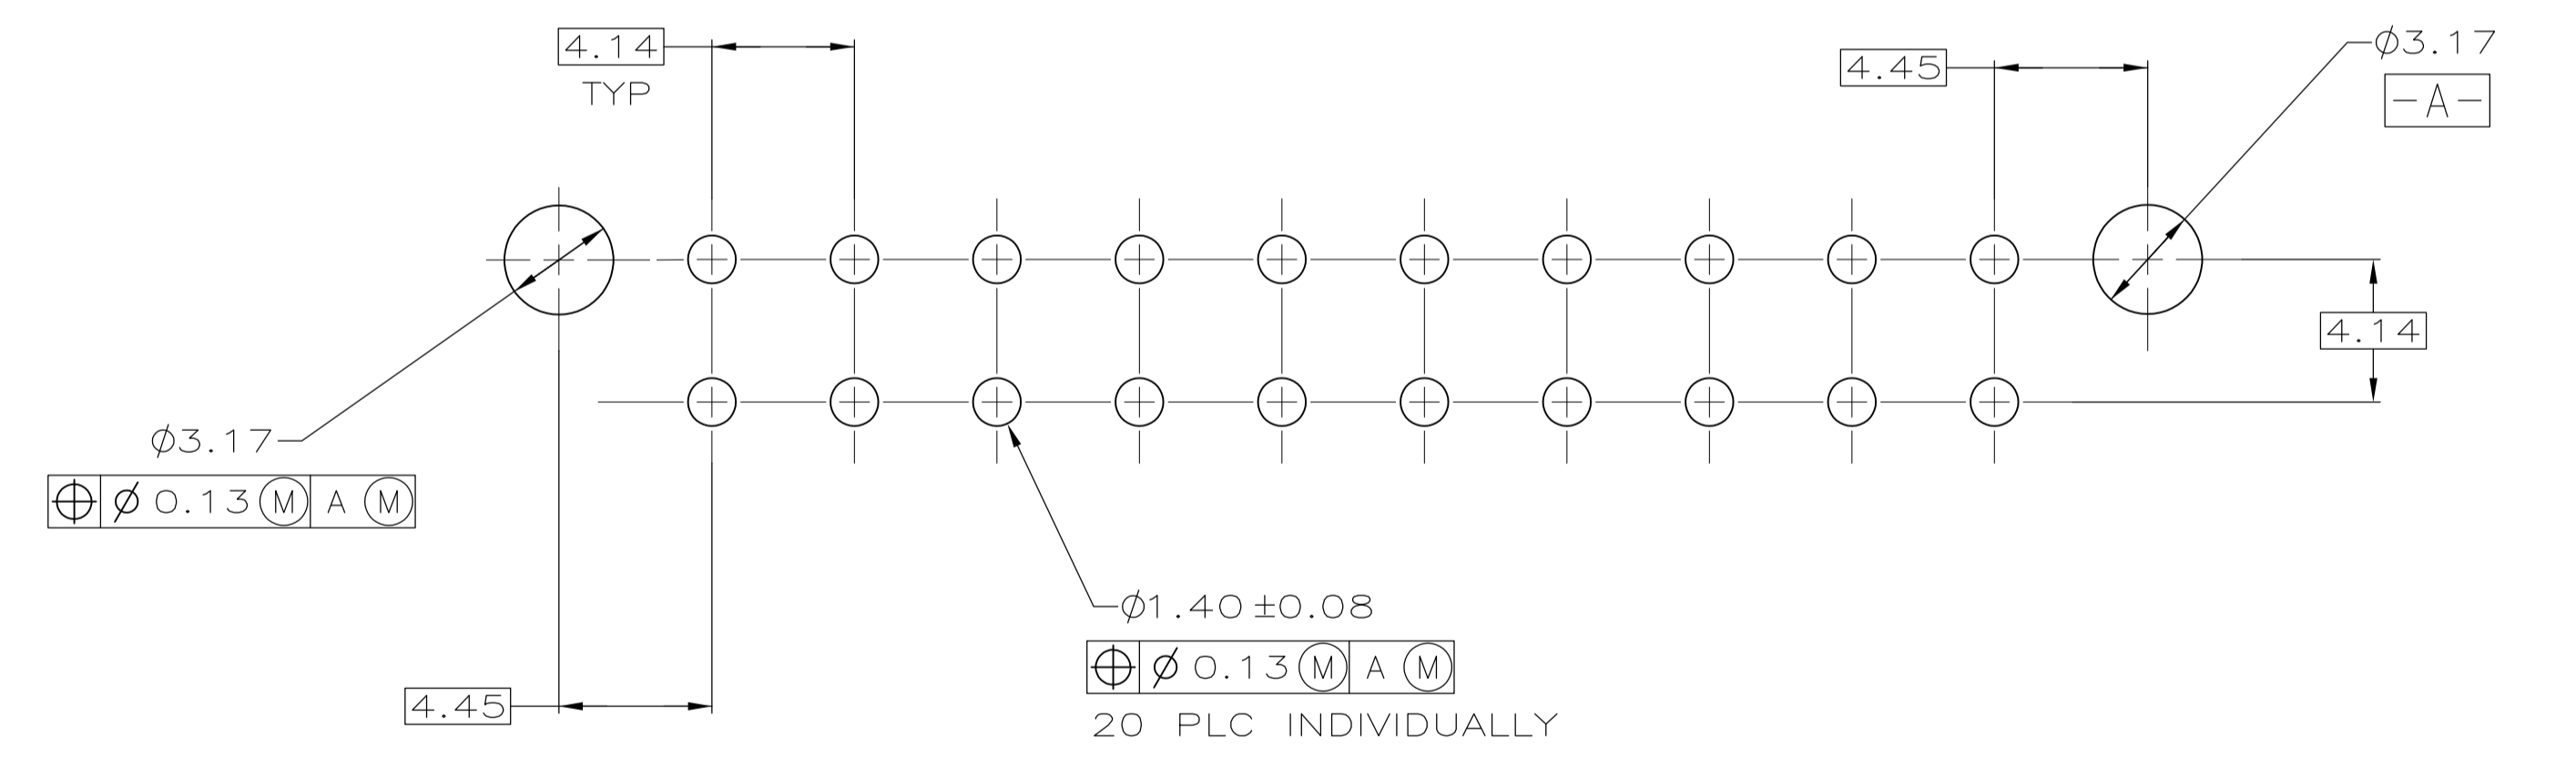

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 THICK P.C. BOARD

BRASS, GOLD $\Delta 5$	NYLON, 94V-0, WHITE	1-794070-1
BRASS, TIN $\Delta 4$	NYLON, 94V-0, WHITE	1-794070-0
BRASS, GOLD $\Delta 3$	NYLON, 94V-0, WHITE	794070-2
BRASS, TIN LEAD $\Delta 1$	NYLON, 94V-0, WHITE	794070-1
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL AND COLOR
PART NUMBER		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± - 1. PLC ± - 2. PLC ± 0.13 3. PLC ± - 4. PLC ± - ANGLES ± -	DWG: K. WHITAKER 6-12-95 CHK: R. SWING 6-12-95 APVD: R. ORSTAD 6-13-95 NAME: HEADER ASSEMBLY, 20 CIRCUIT, DOUBLE ROW VERTICAL, MINI-UNIVERSAL MATE-N-LOK SIZE: A1 CAGE CODE: 794070 DRAWING NO: 794070	DTN: K. WHITAKER 6-12-95 CHK: R. SWING 6-12-95 APVD: R. ORSTAD 6-13-95 NAME: TE Connectivity PRODUCT SPEC: --- APPLICATION SPEC: --- WEIGHT: --- SCALE: 5:1 SHEET: 1 OF 1 REV: E
---	--	---

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-794070-0](#)