



ENK Series

IW (Form B)

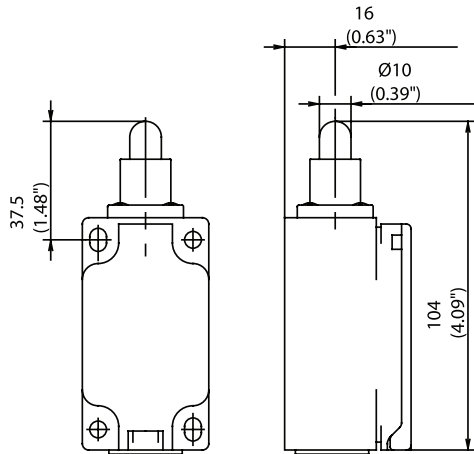

RIW (Form C)

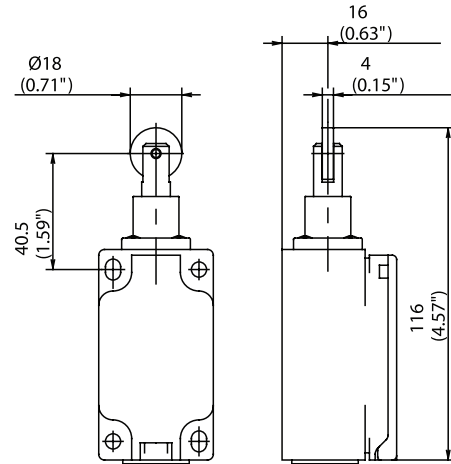


Switching Operation

1 NC / 1 NO Contacts


Slow Action

608.1102.001
ENK-U1Z IW




Snap Action

608.1152.007
ENK-SU1Z IW




Slow Action

608.1117.002
ENK-U1Z RIW



Snap Action

608.1167.008
ENK-SU1Z RIW




2 NC Contacts

-

-

608.1817.281
ENK-A2Z RIW



-

2 NO Contacts

-

-

-


-

1 NC / 1 NO Contacts Overlapping

-

-

608.1317.307
ENK-UV1Z RIW



-

Replacement actuator:

391.8020.660

391.8170.661

Technical Information

Slow Action

Snap Action

Slow Action

Snap Action

Maximum Switching Voltage

240V

240V

240V

240V

Max. Switching Amps (up to)*

10A

10A

10A

10A

B10d (up to)*

20 Million

20 Million

20 Million

20 Million

Mechanical Service Life (up to)*

10 x 10⁶

10 x 10⁶

10 x 10⁶

10 x 10⁶

Switching Frequency

≤ 100/min

≤ 100/min

≤ 100/min

≤ 100/min

Operating Temperature

-30 °C to +80 °C

-30 °C to +80 °C

-30 °C to +80 °C

-30 °C to +80 °C

Protection Rating

IP65

IP65

IP65

IP65

Utilization Category (up to)*

AC-15, Ue/Ue 240V 3A

AC-15, Ue/Ue 240V 3A

AC-15, Ue/Ue 240V 3A

AC-15, Ue/Ue 240V 3A

Rate Insulation Voltage

400VAC

400VAC

400VAC

400VAC

Approvals

* Depending on switching system - see technical information for details



Special features/variants (on request)

- Available with black enclosure and following contacts:
3 NC contacts

Special features/variants (on request)

- Available for high temperature range and following contacts:
3 NC contacts

Drawing dimensions in mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Altech:](#)

[608.1152.007](#) [608.1117.002](#) [608.1102.001](#) [608.1817.281](#) [608.1317.307](#)