


LOC	DIST	REVISIONS					
AD	39	P	LTR	DESCRIPTION	DATE	DWN	APVD
		P		REVISED PER ECO-11-004820	21MAR11	RK	HMR

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA,
ALL OVER 0.00127 [.000050] NICKEL ENTIRE POST.

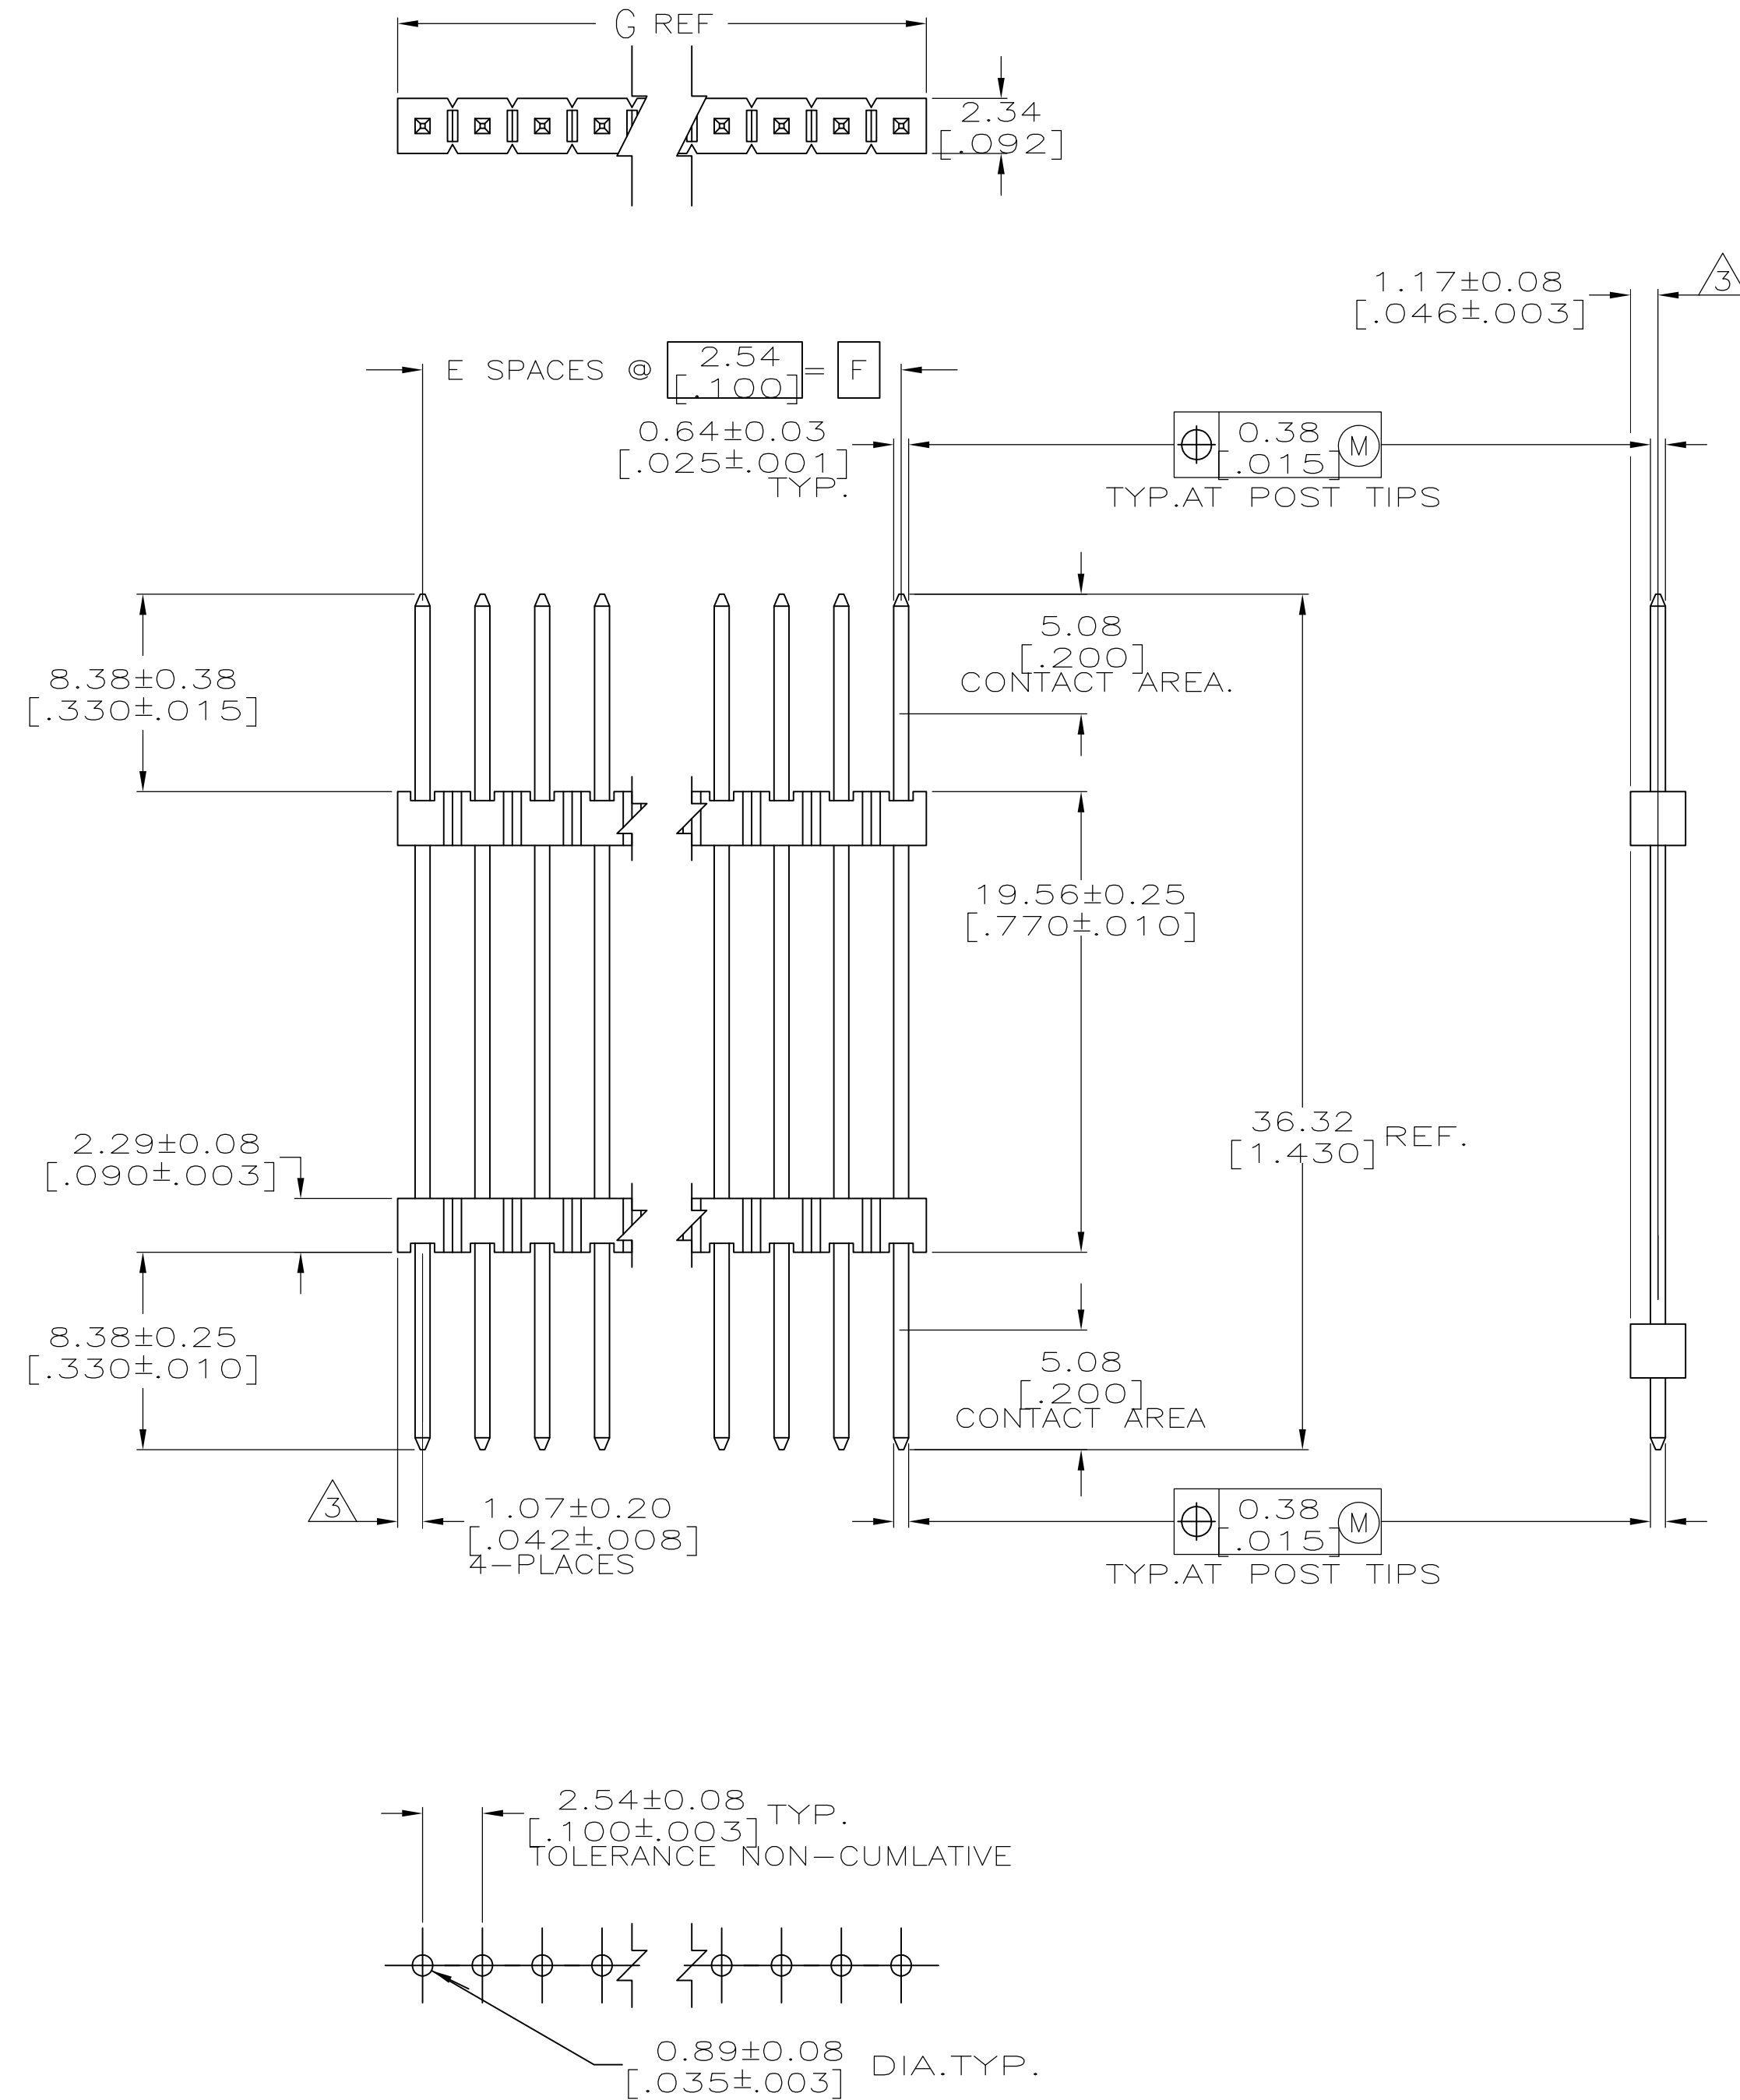

RECOMMENDED HOLE LAYOUT

[3.984]	[3.900]	39	40	4-146482-0
[3.884]	[3.800]	38	39	3-146482-9
[3.784]	[3.700]	37	38	3-146482-8
[3.684]	[3.600]	36	37	3-146482-7
[3.584]	[3.500]	35	36	3-146482-6
[3.484]	[3.400]	34	35	3-146482-5
[3.384]	[3.300]	33	34	3-146482-4
[3.284]	[3.200]	32	33	3-146482-3
[3.184]	[3.100]	31	32	3-146482-2
[3.084]	[3.000]	30	31	3-146482-1
[2.984]	[2.900]	29	30	3-146482-0
[2.884]	[2.800]	28	29	2-146482-9
[2.784]	[2.700]	27	28	2-146482-8
[2.684]	[2.600]	26	27	2-146482-7
[2.584]	[2.500]	25	26	2-146482-6
[2.484]	[2.400]	24	25	2-146482-5
[2.384]	[2.300]	23	24	2-146482-4
[2.284]	[2.200]	22	23	2-146482-3
[2.184]	[2.100]	21	22	2-146482-2
[2.084]	[2.000]	20	21	2-146482-1
[1.984]	[1.900]	19	20	2-146482-0
[1.884]	[1.800]	18	19	1-146482-9
[1.784]	[1.700]	17	18	1-146482-8
[1.684]	[1.600]	16	17	1-146482-7
[1.584]	[1.500]	15	16	1-146482-6
[1.484]	[1.400]	14	15	1-146482-5
[1.384]	[1.300]	13	14	1-146482-4
[1.284]	[1.200]	12	13	1-146482-3
[1.184]	[1.100]	11	12	1-146482-2
[1.084]	[1.000]	10	11	1-146482-1
[.984]	[.900]	9	10	1-146482-0
[.884]	[.800]	8	9	146482-9
[.784]	[.700]	7	8	146482-8
[.684]	[.600]	6	7	146482-7
[.584]	[.500]	5	6	146482-6
[.484]	[.400]	4	5	146482-5
[.384]	[.300]	3	4	146482-4
[.284]	[.200]	2	3	146482-3
[.184]	[.100]	1	2	146482-2
[.084]	-	-	1	146482-1
G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 14-MAR-97 E. BRANDBERG CHK. 14-MAR-97 G. DUBINIZKI APP'D 14-MAR-97 G. DUBINIZKI		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± . 1 PLC ± .01 2 PLC ± 0.51[.02] 3 PLC ± 0.127[.005] 4 PLC ± 0.127[.005] ANGLES ±		NAME HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED	
MATERIAL 		FINISH 		PRODUCT SPEC APPLICATION SPEC WEIGHT —	
		CUSTOMER DRAWING		SIZE A1	
		CAGE CODE 00779		DRAWING NO C-146482	
		SCALE 4:1		SHEET 1 of 1 REV. P	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-146482-8](#)