
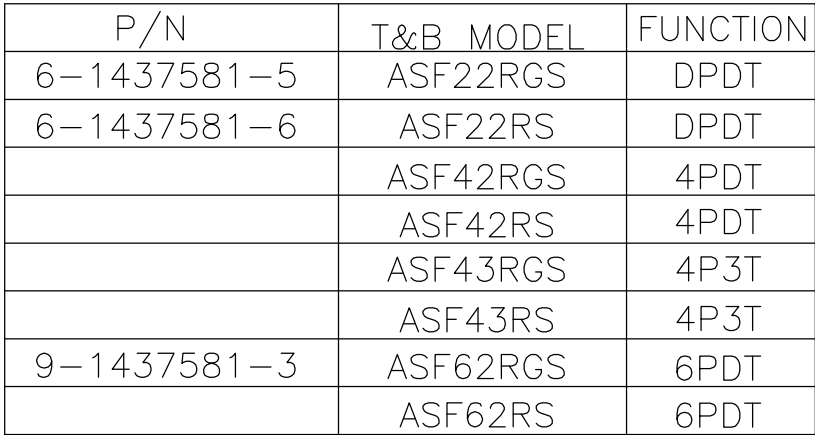



4805 (3/11)

D

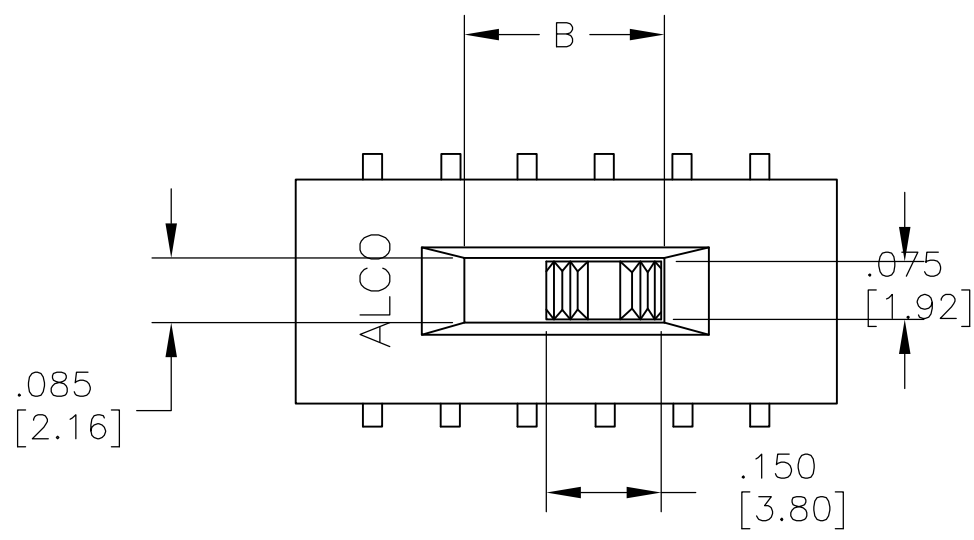


* SIDE ACTUATOR ONLY.

DOTTED LINE INDICATES
SIDE ACTUATOR

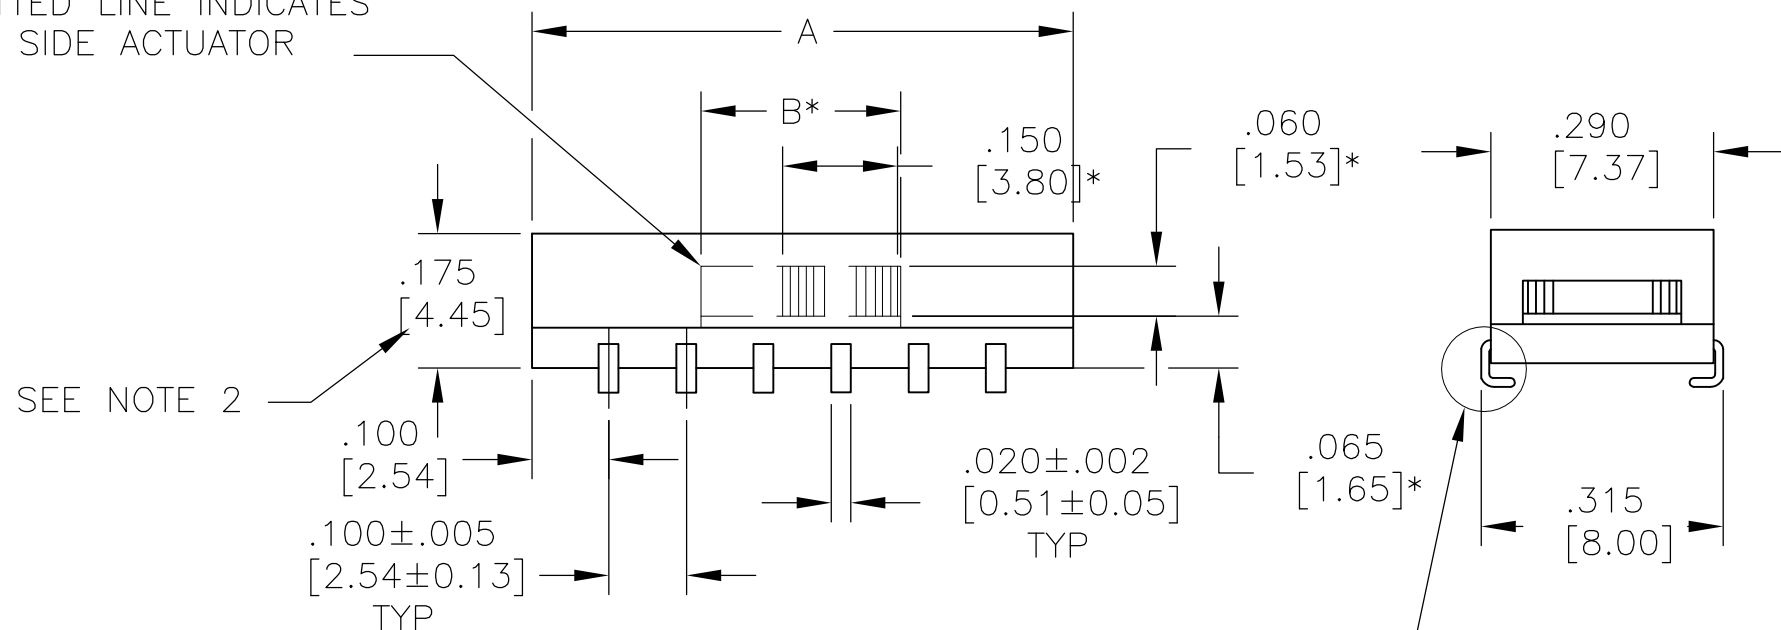


ASE

SEE NOTE A

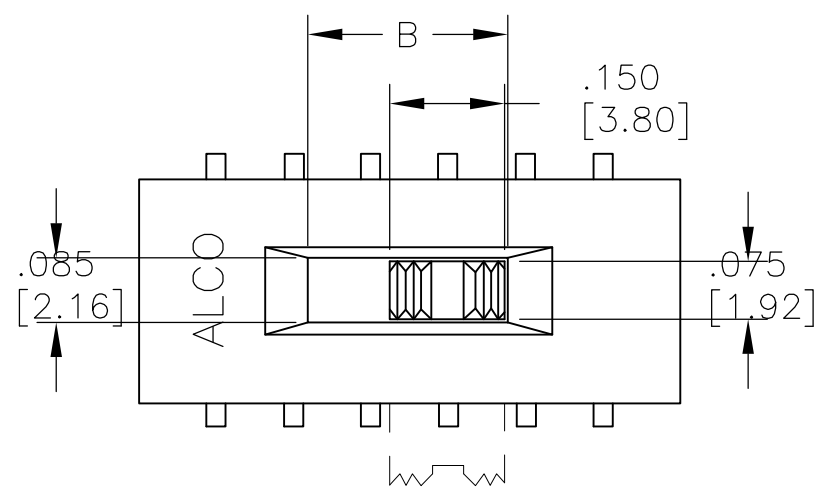

* SIDE ACTUATOR ONLY.


DOTTED LINE INDICATES
SIDE ACTUATOR

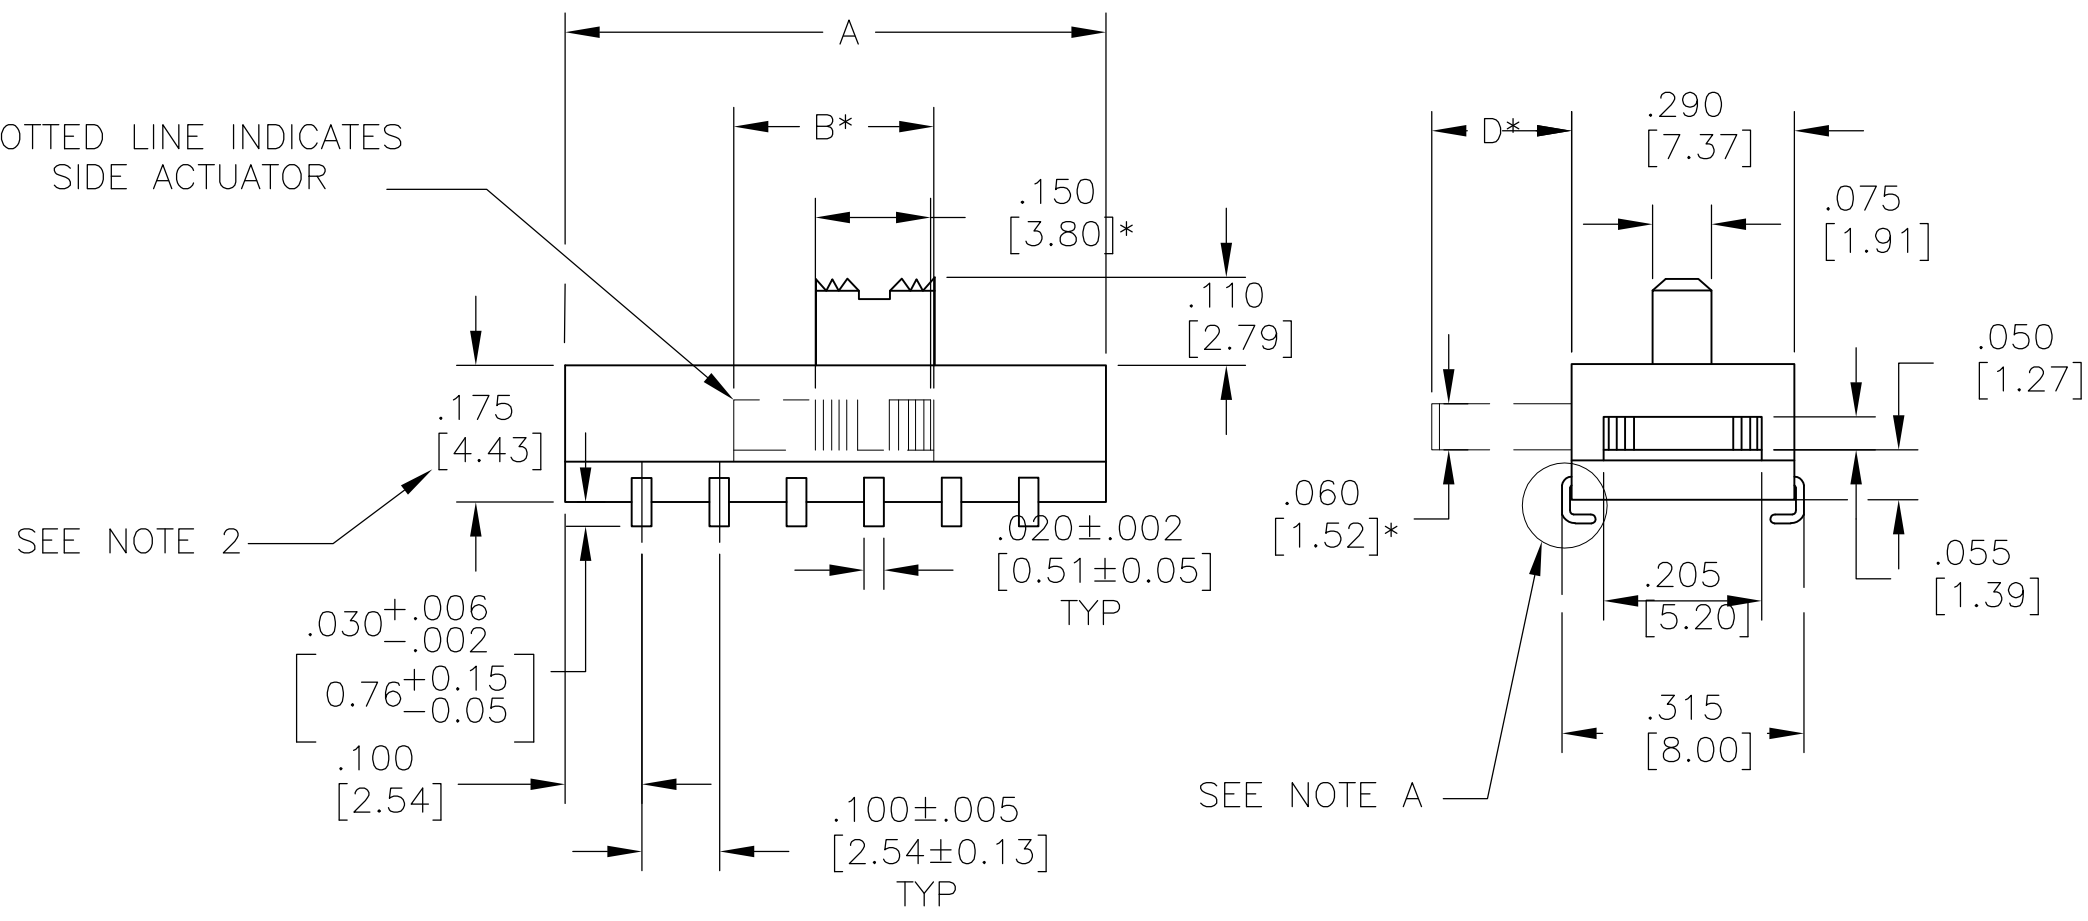

ASE


SEE NOTE A

REVERSE "L" TYPE SURFACE MOUNT

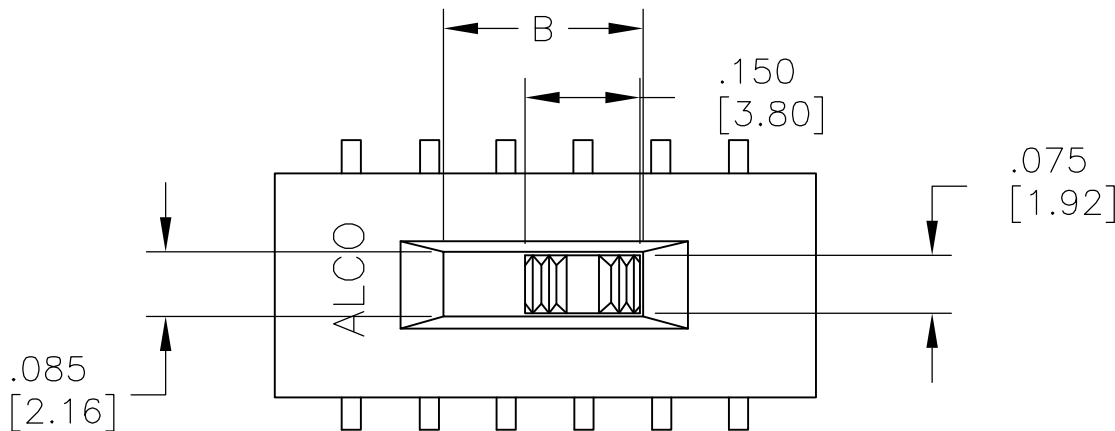


* SIDE ACTUATOR ONLY.

DOTTED LINE INDICATES
SIDE ACTUATOR

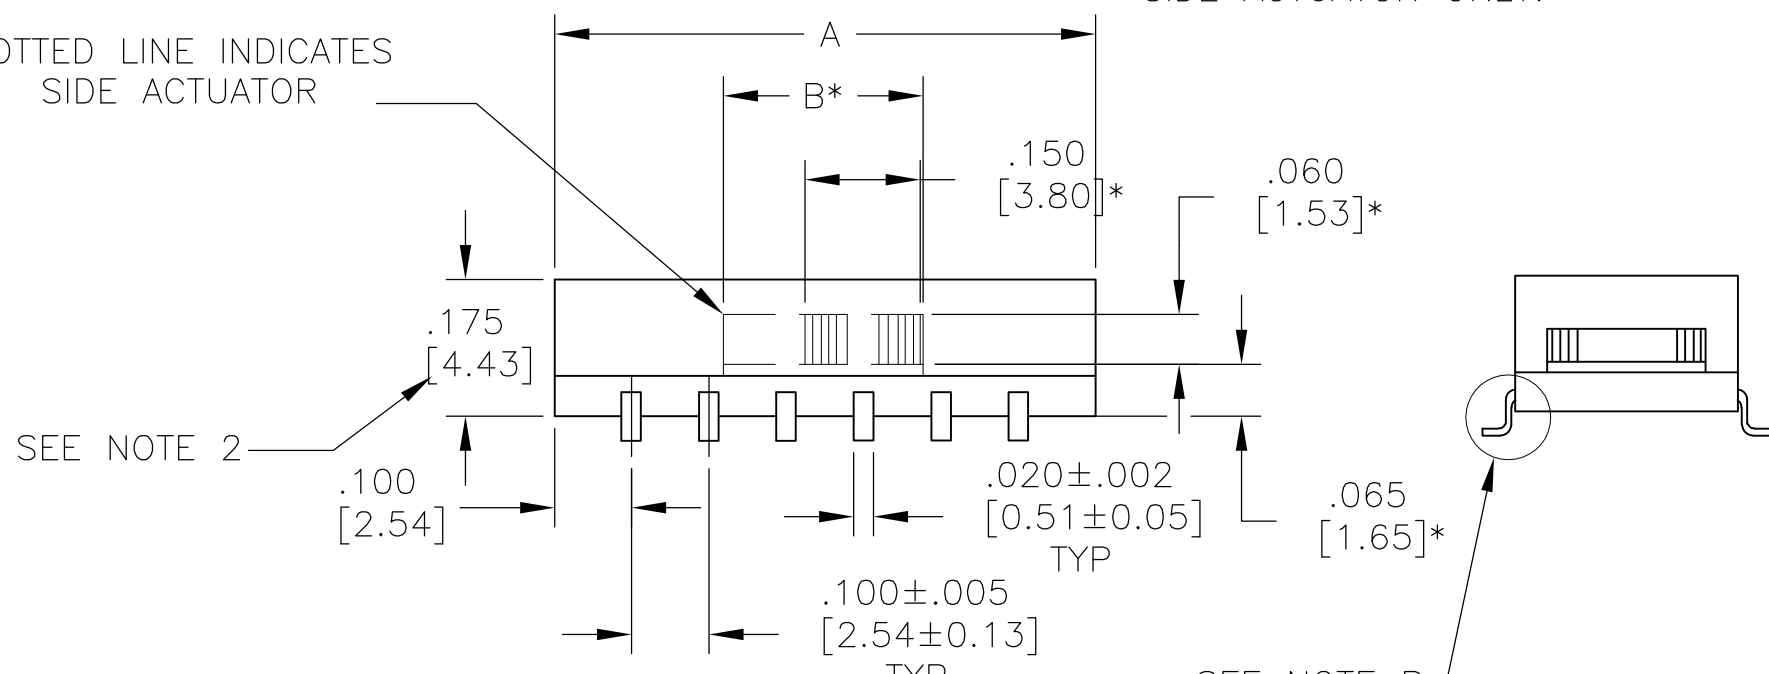


ASF

SEE NOTE B

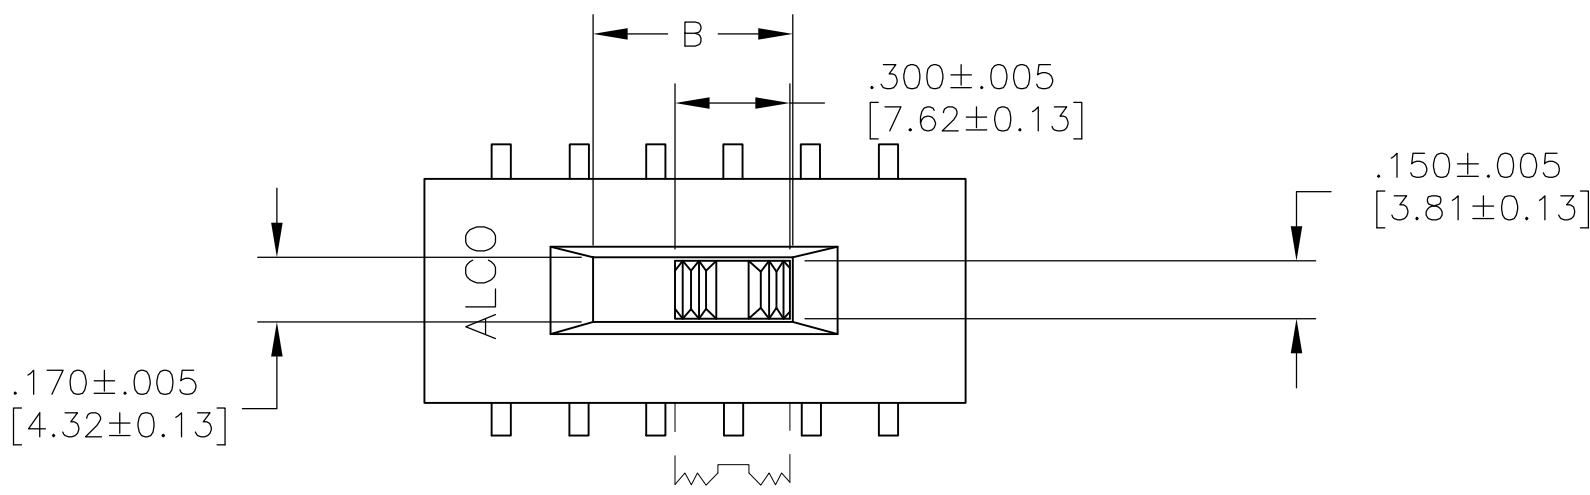

* SIDE ACTUATOR ONLY.



DOTTED LINE INDICATES
SIDE ACTUATOR

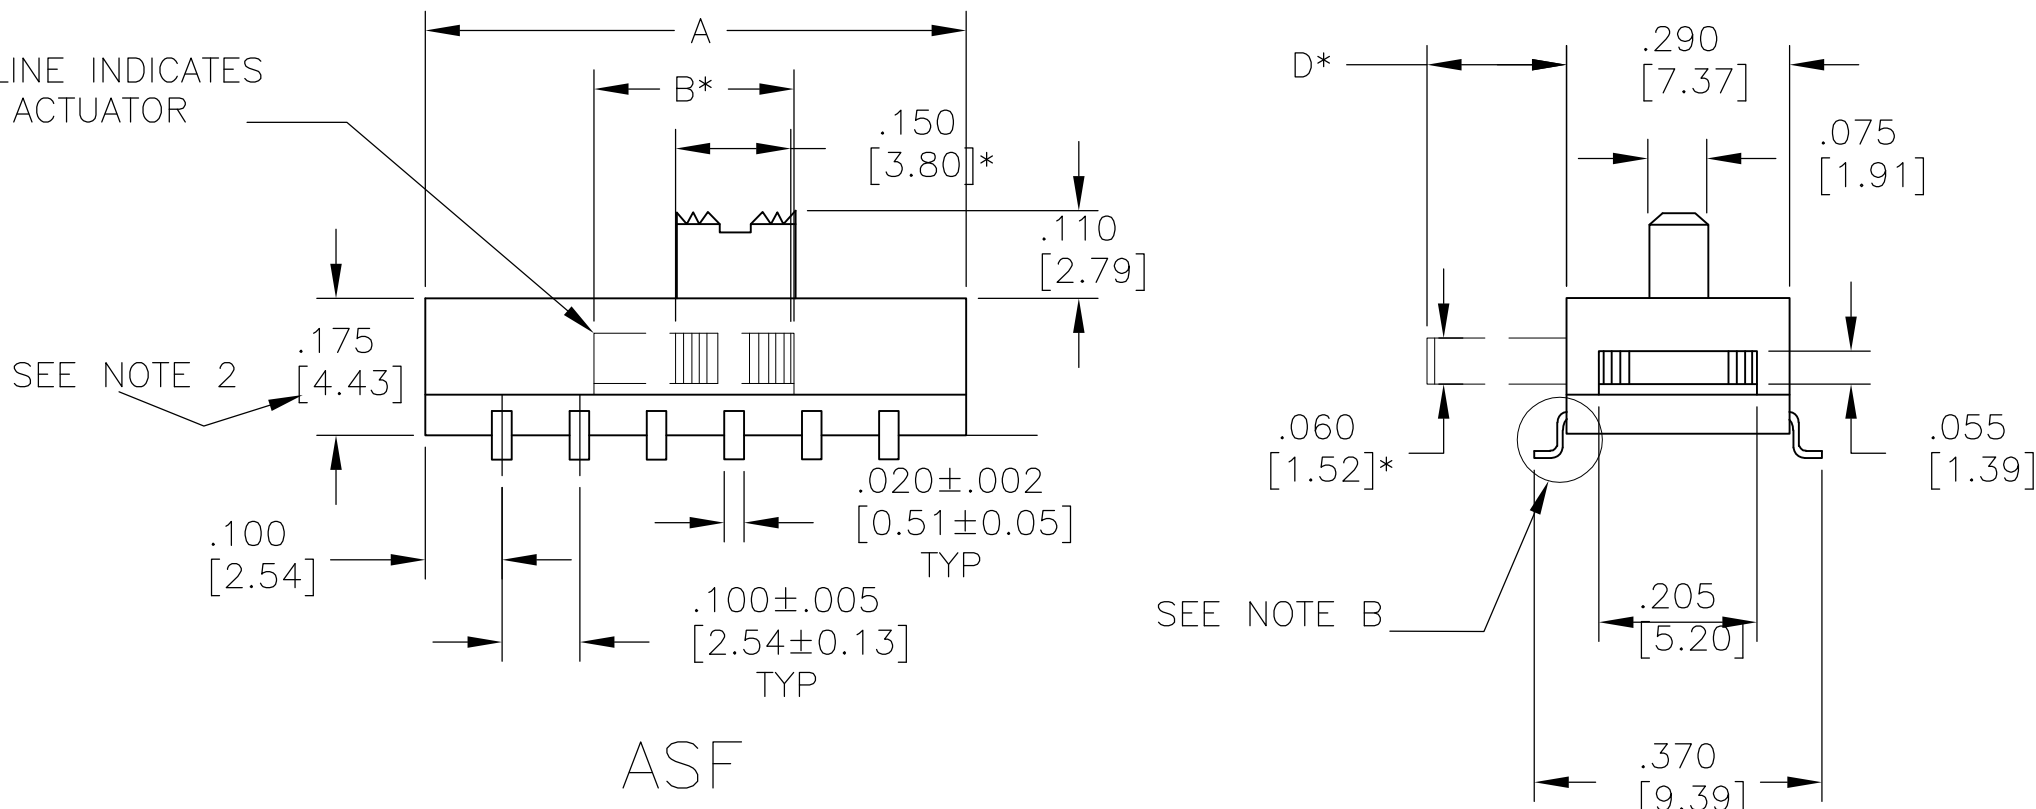

ASF

SEE NOTE B

"L" TYPE SURFACE MOUNT

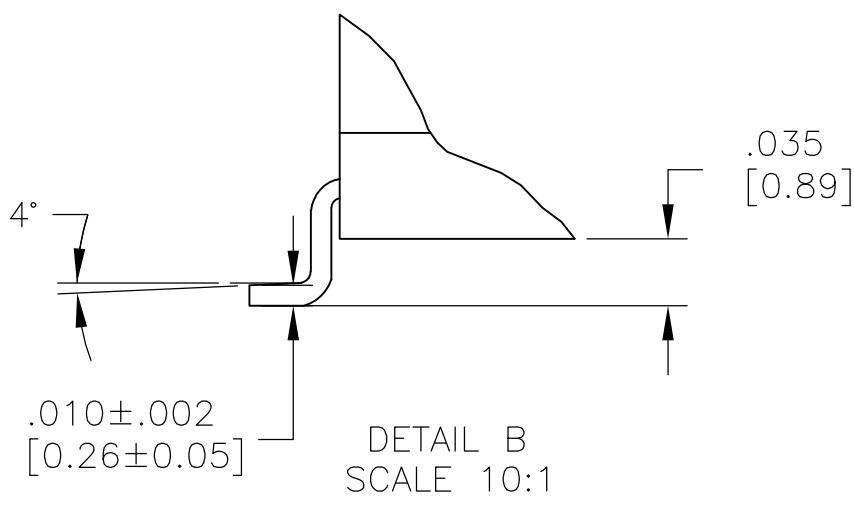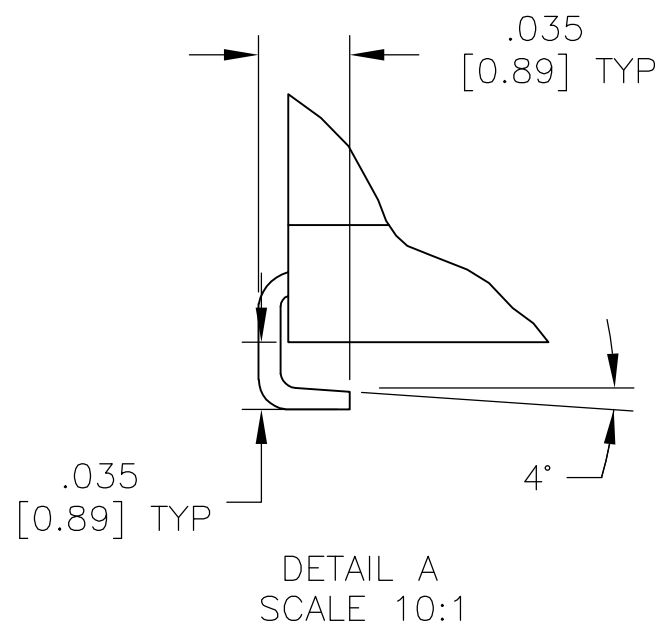

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BINNER	12JAN04	TE Connectivity	
DIMENSIONS: INCHES [mm]		CHK —	—		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	SLIDE SWITCH ASE/ASF, AUTO-INSERTABLE, THRU-HOLE AND SURFACE MOUNT	
	0. PLC ± .		PRODUCT SPEC		
	1. PLC ± .		APPLICATION SPEC		
	2. PLC ± .		—		
MATERIAL SEE SPECIFICATIONS		FINISH —	WEIGHT —	SIZE A1	RESTRICTED TO —
CUSTOMER DRAWING			SCALE 4:1	SHEET 2	REV K2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1437582-0](#)