# 10/100 Base-Tx Tap Up RJ45 with LED

ARJC01-111002L

## **RoHS/RoHS II Compliant**



16.2 x 13.55 x 25.3mm

### **FEATURES:**

- Compliant with IEEE802.3 standard
- 350uH minimum OCL with 8mA bias current
- High performance for maximum EMI suppression
- High reliability 750 mating/unmating cycles

#### > APPLICATIONS:


- Designed for most leading PHY IC manufacturers such as Broadcom, Marvell, Microsemi.
- Supports 10/100 Base-Tapplications
- Provides signal conditioning, EMI suppression and signal isolation.

### > STANDARD SPECIFICATIONS

Operating temperature range: -40°C to +85°C Storage temperature range: -25°C to +70°C Standard Electrical Specifications @25°C

Parameters	Minimum	Typical	Maximum	Units	Notes
Turn Ratio (±3%)	1CT:1CT				Tx and Rx
Inductance	350			uН	100kHz/0.1V@8mA
Insertion Loss			-1.0	dB	1-100MHz
Return Loss	-18			dB	1-10MHz
	-16				10-30MHz
	-14				30-60MHz
	-12				60-80MHz
	-10				80-100MHz
CMR	-35			dB	1-100MHz
Crosstalk	-35			dB	1-100MHz
Hipot	1500Vrms/1mA/1s				

#### MECHANICAL DIMENSIONS

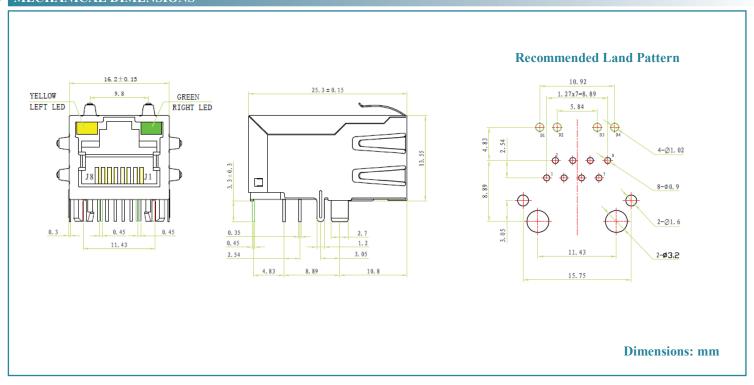



Revised: 08.16.2016


# 10/100 Base-Tx Tap Up RJ45 with LED

ARJC01-111002L

### **RoHS/RoHS II Compliant**




### **SCHEMATICS**

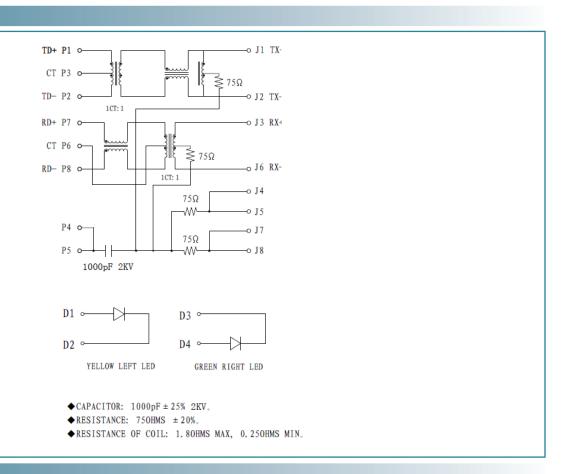

### **PACKING:**

### Packing: (100pcs/tray)

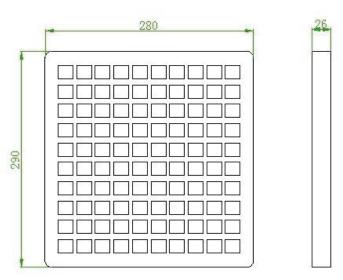

**Dimensions: mm** 

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

ARJC01-111002L