


PART NUMBER	GT-NB6S1525	REV.	B
DATE	E.C.N. NUMBER AND REVISION COMMENTS	REV.	
12.12.06	E.C.N. #11148.	A	
01.03.12	E.C.N. #10BRDR. & REDRAWN.		B

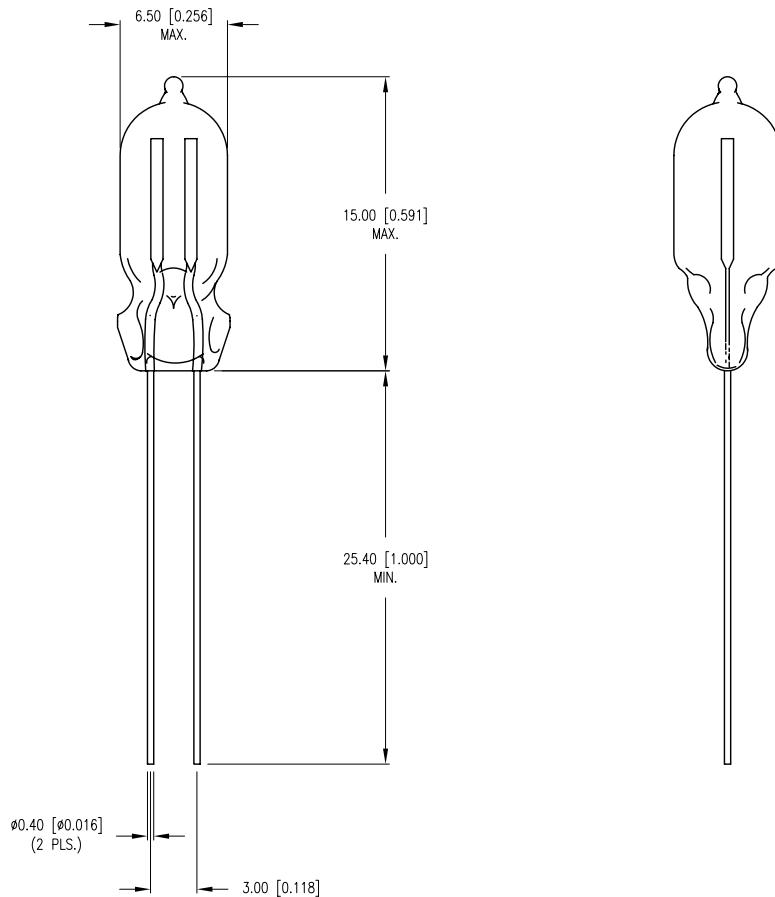

ELECTRO-OPTICAL CHARACTERISTICS			
PARAMETER	MIN	TYP	MAX
OPERATING VOLTAGE	90	115	V
STARTING VOLTAGE AC/DC		85/120	V
OPERATING CURRENT		0.8	mA
LIGHT OUTPUT		25	mLM
LIFE HOURS		10,000	HOURS

NOTES:

1. EXTERNAL RESISTOR VALUE 51K OHMS.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+0.00}_{-0.00} DECIMAL PRECISION MAX.= ^{+0.00}_{-0.00} DECIMAL PRECISION

UNCONTROLLED DOCUMENT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lumex](#):

[GT-NB6S1525](#)