


Number of contacts

78+2, 60+4, 42+6, 24+8

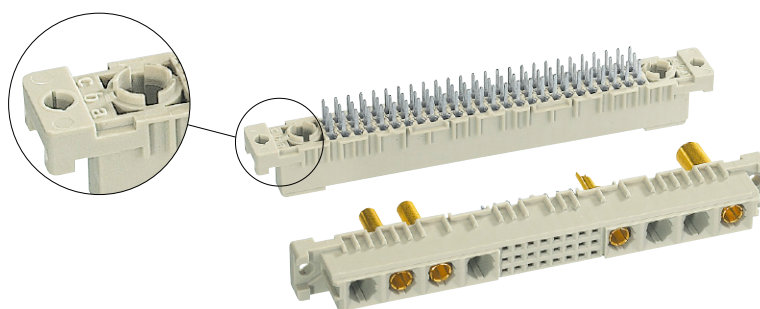

Female connectors

Identification	No. of contacts	Contact arrangement	Part number	Performance levels according to IEC 60603-2. Explanation chapter 00	
			3	2	1
Female connector with solder pins 2.9 mm (without special contacts)	78 + 2		Performance level 3 on request	09 03 278 6804	
	60 + 4			09 03 260 6804	
	42 + 6			09 03 242 6804	
	24 + 8			09 03 224 6804	
Female connector with solder pins 4.5 mm (without special contacts)	78 + 2			09 03 278 6805	
	60 + 4			09 03 260 6805	
	42 + 6			09 03 242 6805	
	24 + 8			09 03 224 6805	
Female connector with solder pins 13 mm (without special contacts)	78 + 2			09 03 278 6401	
	60 + 4			09 03 260 6401	
	42 + 6			09 03 242 6401	
	24 + 8			09 03 224 6401	
Female connector with press-in pins 4.5 mm (without special contacts)	78 + 2			09 03 278 6850	09 03 278 2850
	60 + 4			09 03 260 6850	
	42 + 6			09 03 242 6850	
	24 + 8			09 03 224 6850	

Other contact arrangements as well with lagging/leading pins on request

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09731606907](#)