

Device connector, rear mounting - RC-12P1N12H000 - 1597207

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid
(<http://phoenixcontact.com/download>)



Device connector for rear wall, RC, straight, shielded: yes, Screw locking, M23, No. of pos.: 12, type of contact: Pin, Solder connection, Axial O-ring, Central fastening M25 x 1.5, Panel thickness min.: 0.8 mm, Panel thickness max.: 6.5 mm

RoHS

Key Commercial Data

Packing unit	20 pc
GTIN	 4 046356 214926
GTIN	4046356214926

Technical data


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings


Device connector, rear mounting - RC-12P1N12H000 - 1597207

Schematic diagram

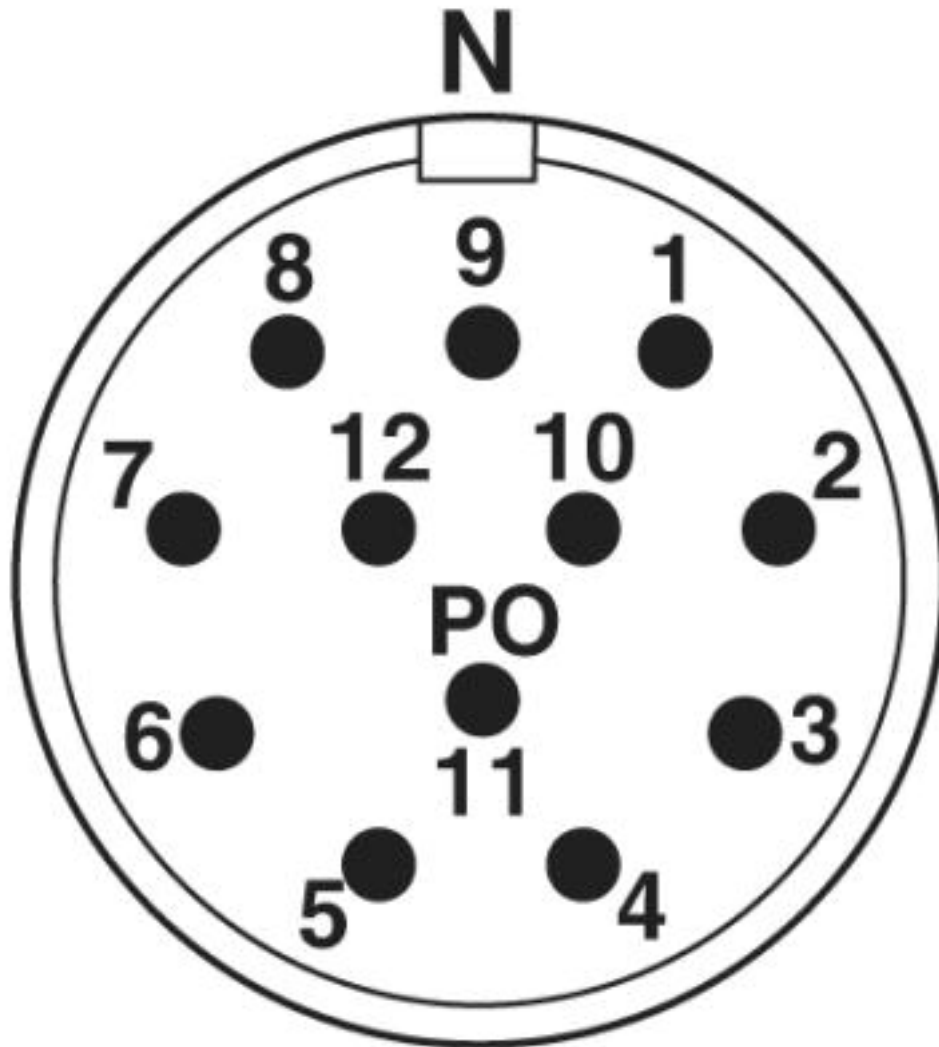


Device connector, rear mounting - RC-12P1N12H000 - 1597207

Dimensional drawing

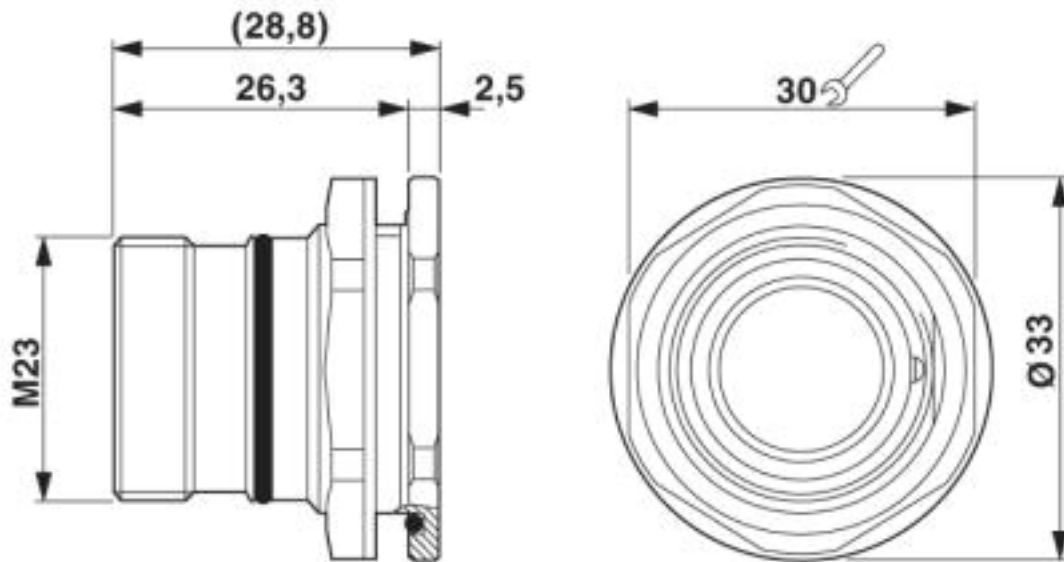

Device connector, rear mounting - RC-12P1N12H000 - 1597207

Dimensional drawing

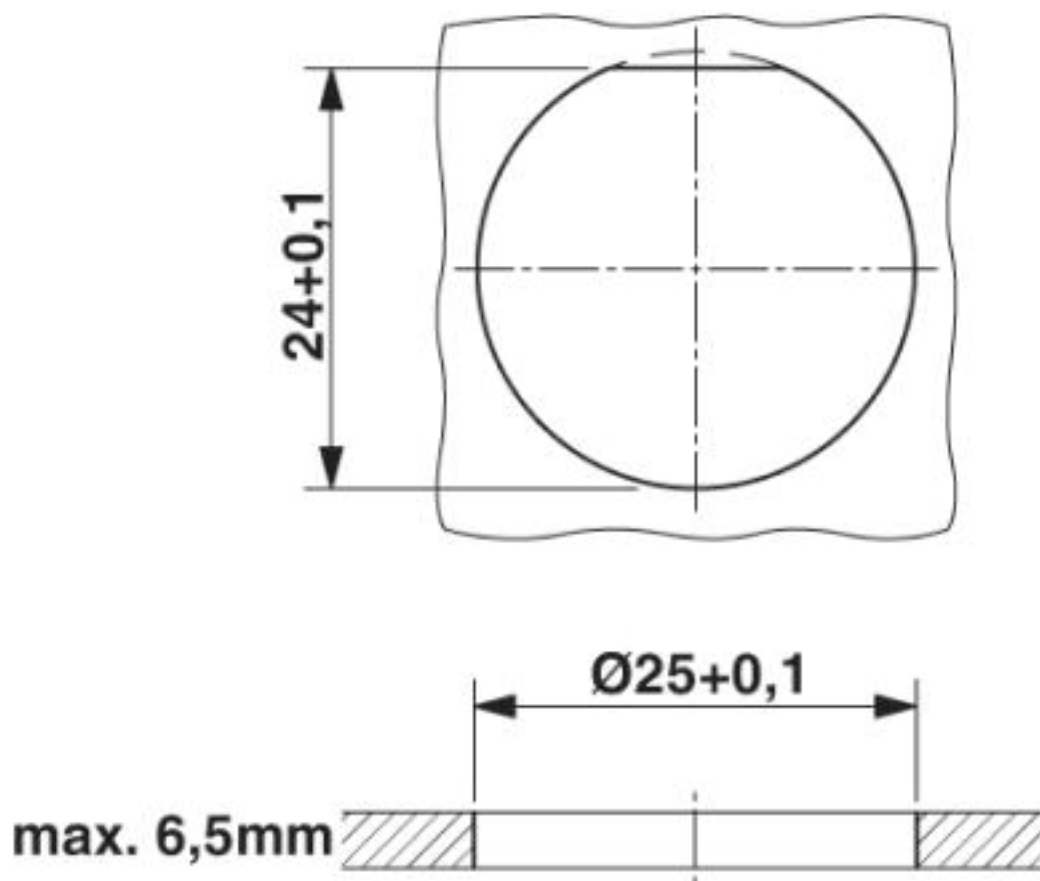

Installation dimensions

Classifications

eCl@ss

eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27279200
eCl@ss 7.0	27440103
eCl@ss 8.0	27440103
eCl@ss 9.0	27440102

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC001121
ETIM 5.0	EC001121

Device connector, rear mounting - RC-12P1N12H000 - 1597207

Classifications

ETIM

ETIM 6.0	EC001121
ETIM 7.0	EC001121

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	39121413
UNSPSC 19.0	39121413

Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>