

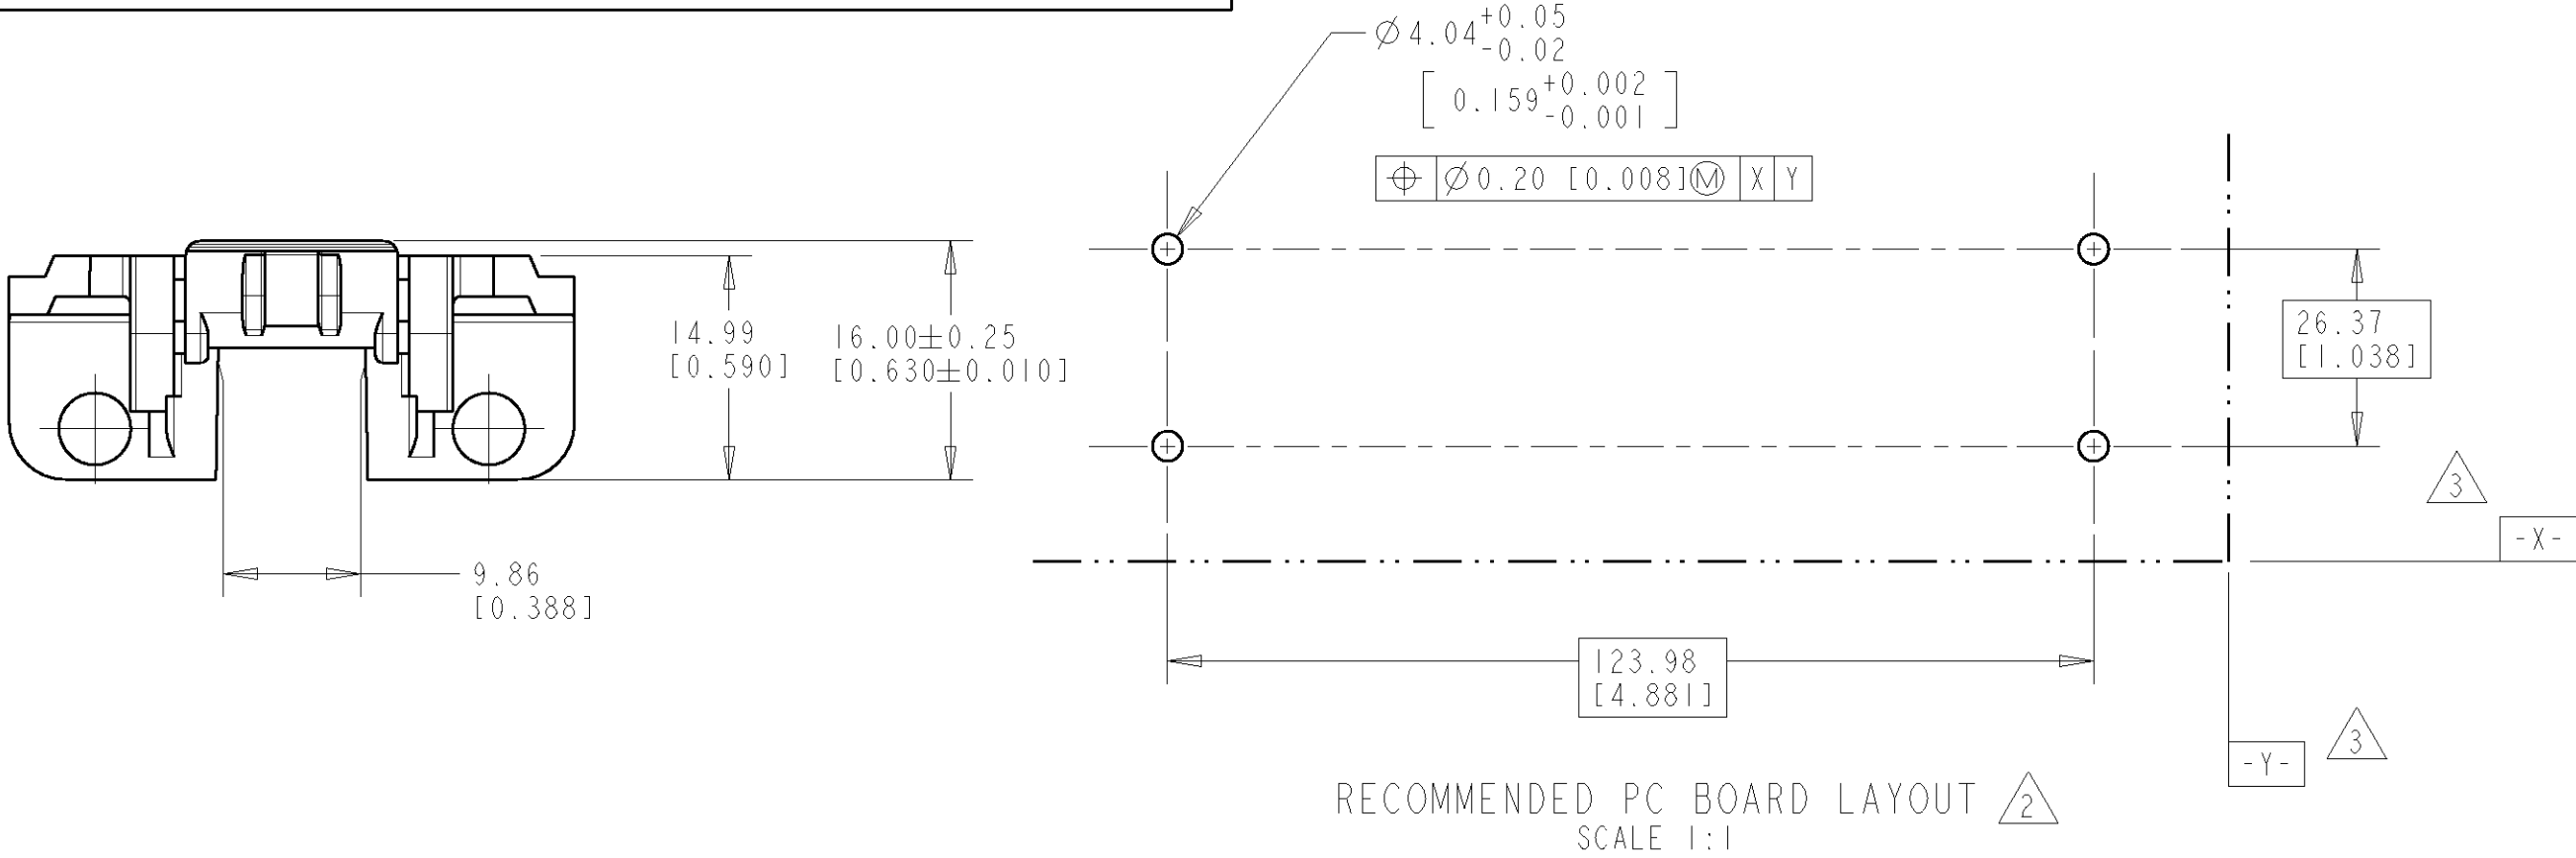
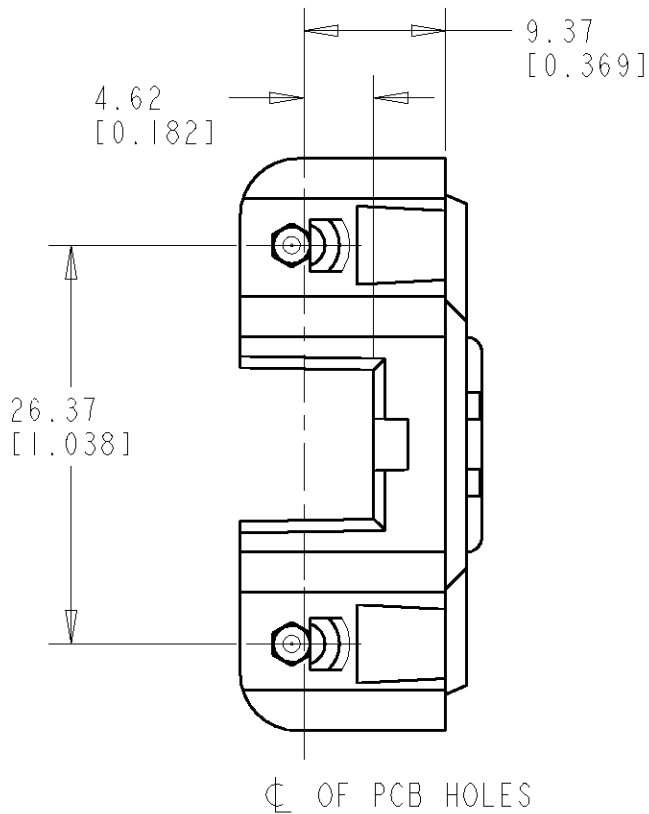
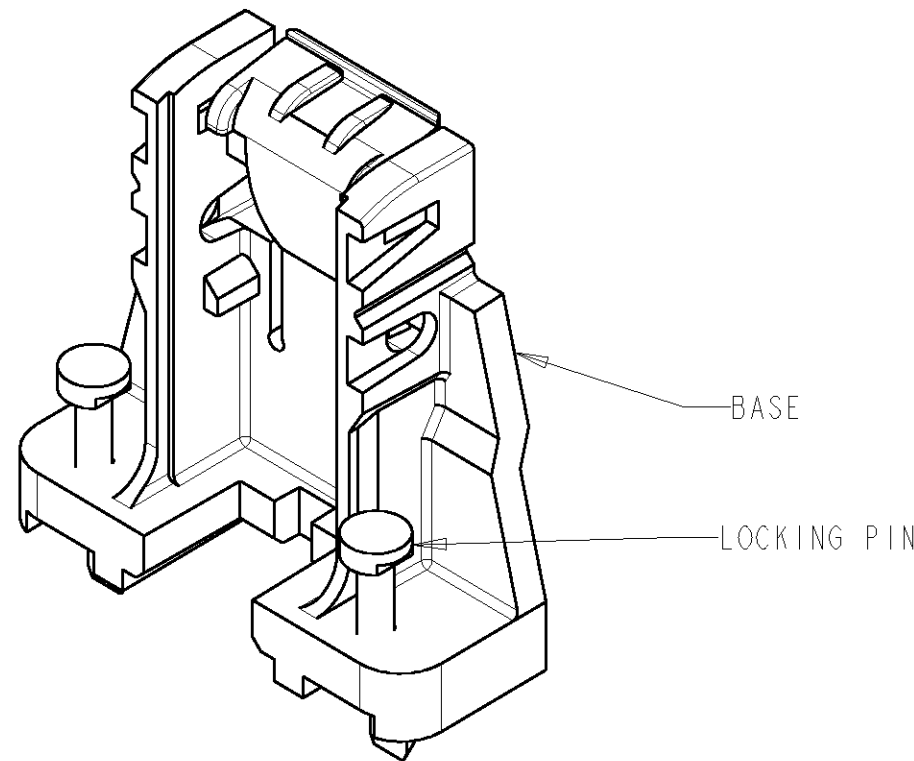


LOC	DIST	REVISIONS					
AD	14	P	LTR	DESCRIPTION	DATE	DWN	APVD
			O	RELEASED	16MAR99	RB	KS

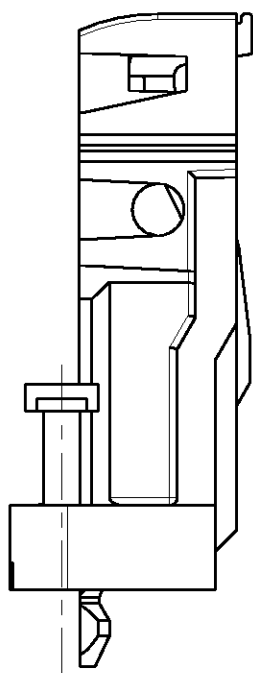

- 1 MATERIAL: UL 94-VO RATED POLYCARBONATE, BLACK.
- 2 RECOMMENDED PC BOARD THICKNESS OF 1.57±0.15 [0.062±0.006].
- 3 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 4 EACH PROCESSOR INSTALLATION REQ'S TWO RETENTION MODULES.

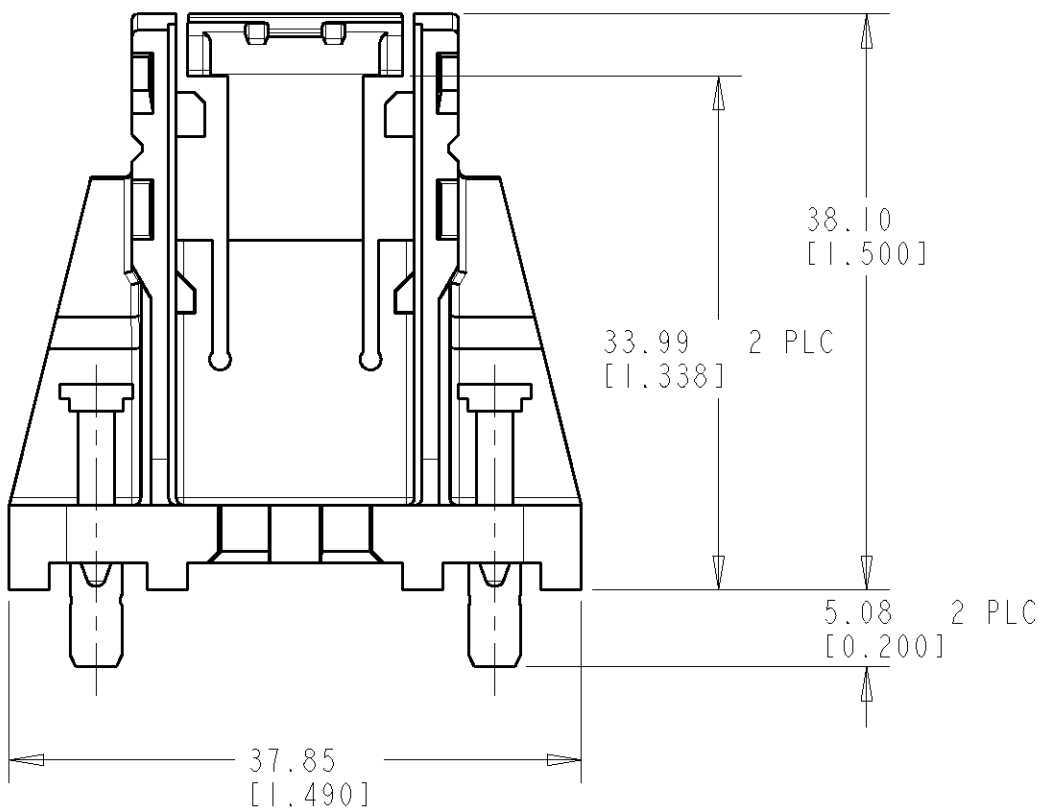

2 MODULES WITH LOCKING PINS	145451-2
1 MODULE WITH LOCKING PINS	145451-1
DESCRIPTION	4 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN R. BROWN 16MAR99	16MAR99	AMP AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK K. STILES 16MAR99	16MAR99		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. SUMMERS 16MAR99	16MAR99	NAME UNIVERSAL RETENTION MODULE ASSEMBLY KIT, PIN FASTENER SHORT LATCH	
0 PLC ± 1 PLC ± 2 PLC ±0.13 [0.005] 3 PLC ± 4 PLC ± ANGLES ± FINISH -		PRODUCT SPEC 108-1826 APPLICATION SPEC - WEIGHT -	108-1826	SIZE A2	CAGE CODE 00779
MATERIAL 1		CUSTOMER DRAWING	SCALE 2:1	DRAWING NO. C-145451	RESTRICTED TO -
		SHEET 1	OF 1	REV 0	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[145451-1](#)