

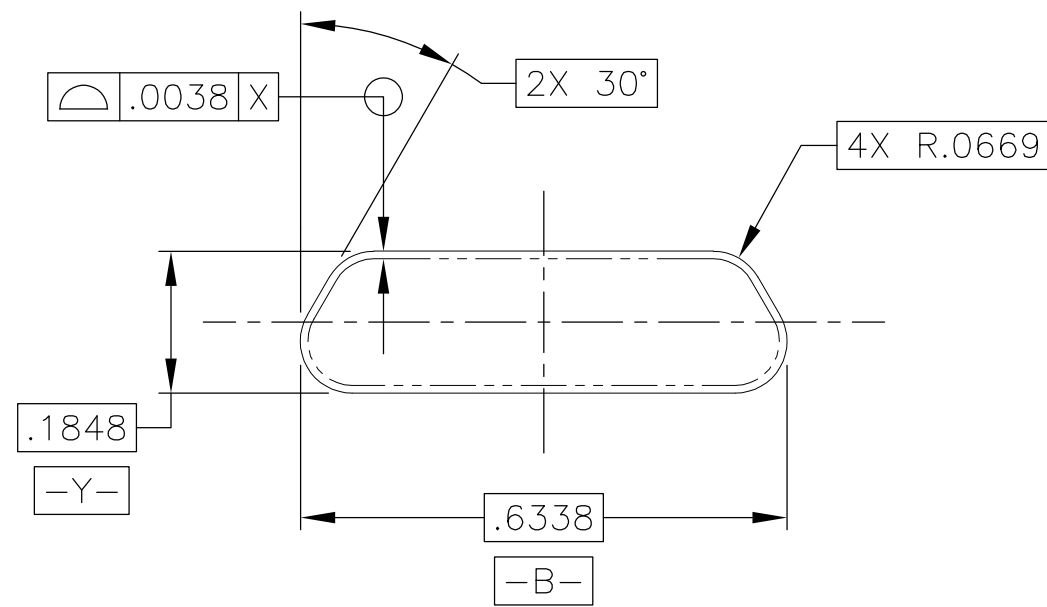
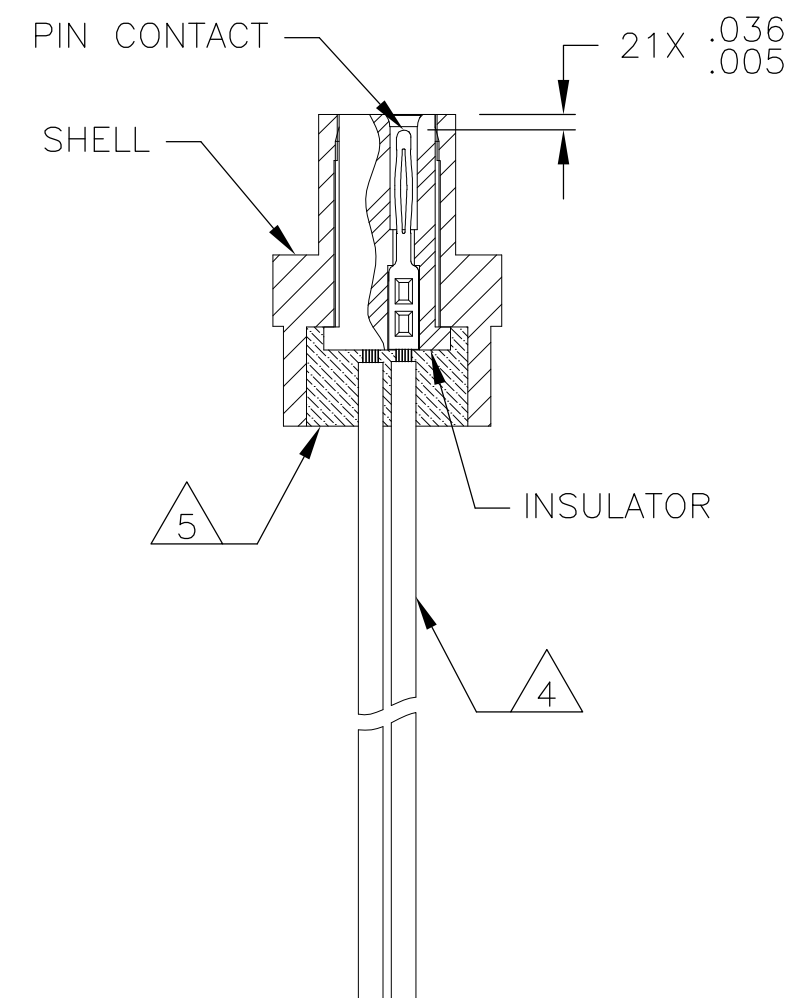
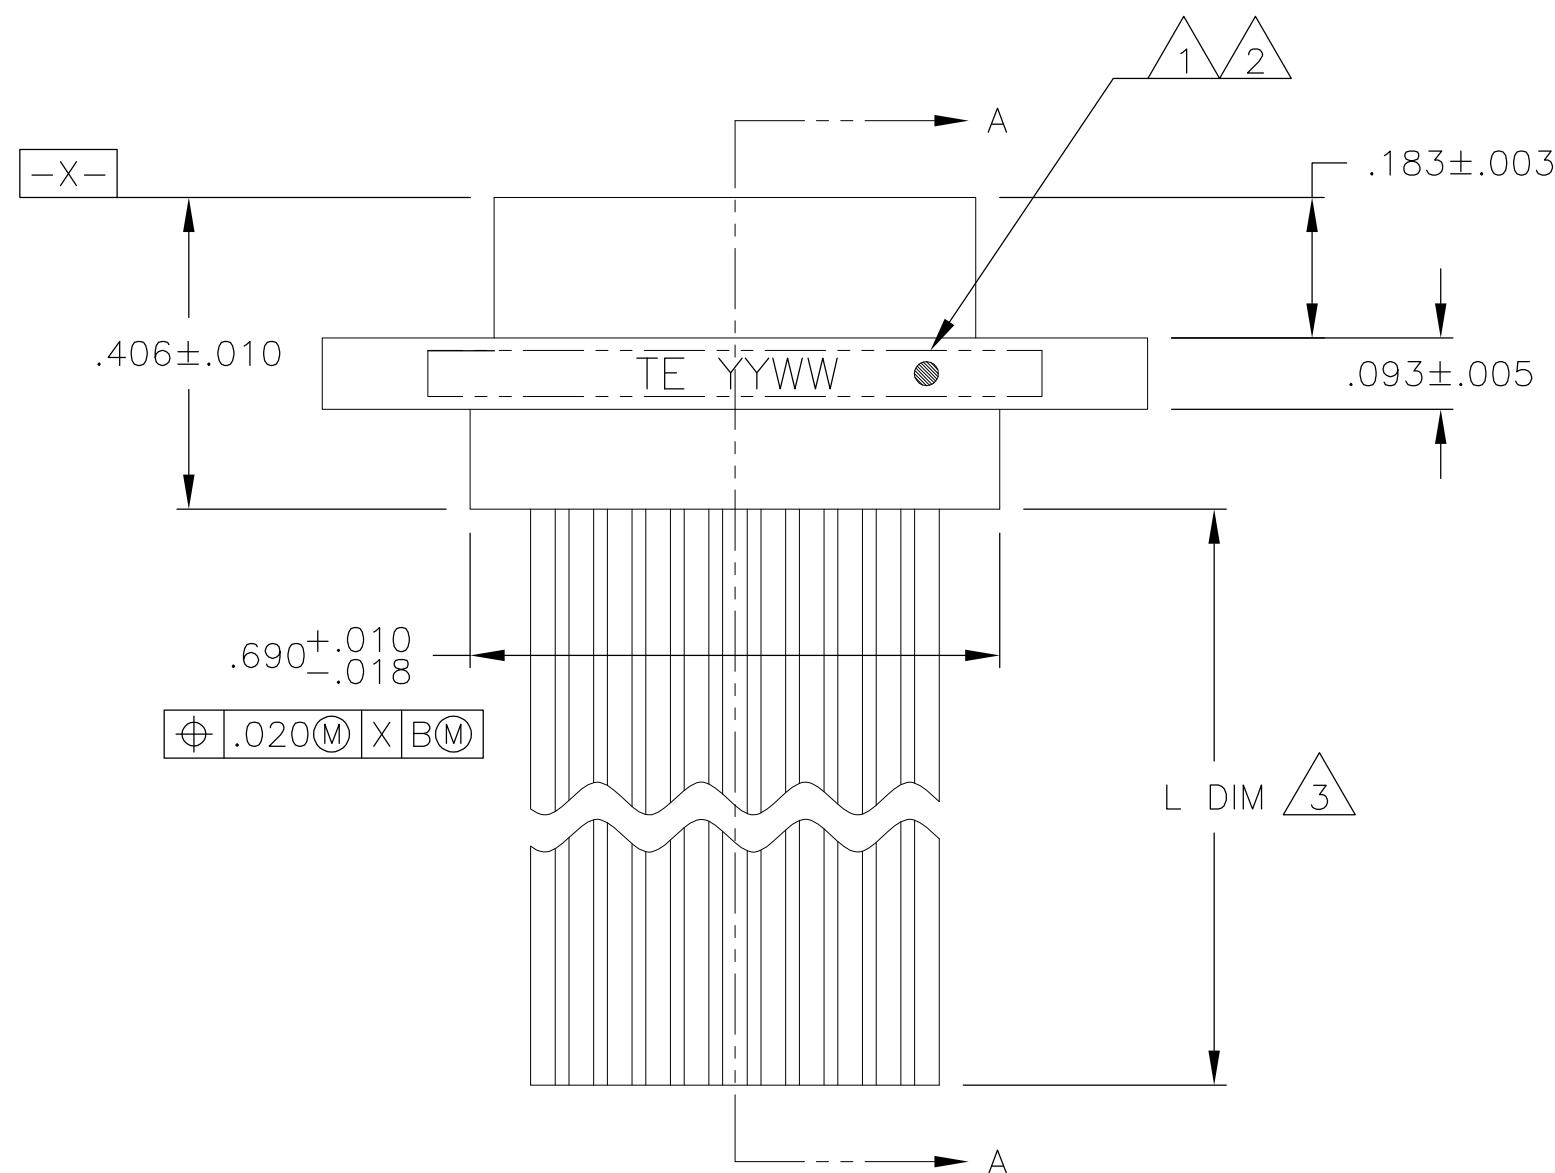
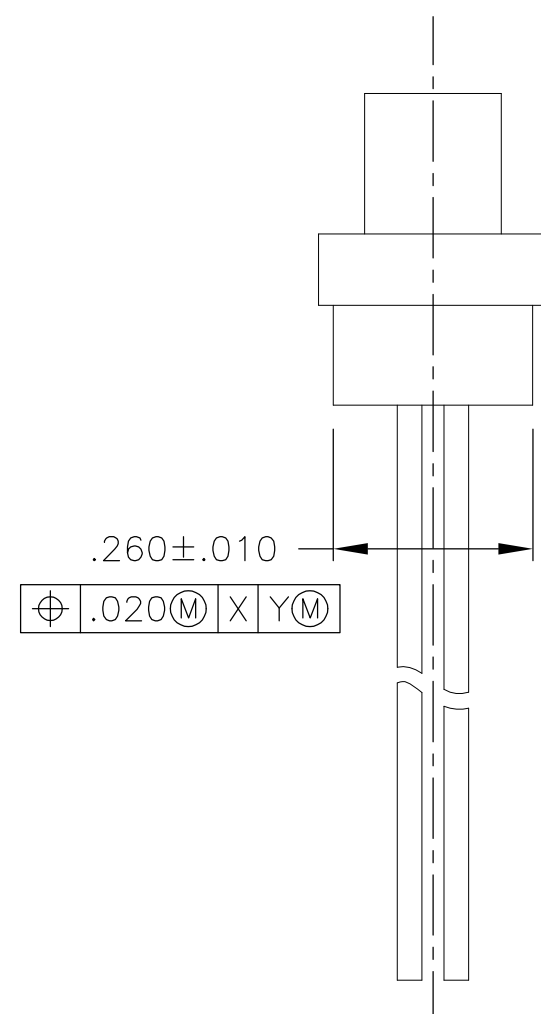


LOC —	DIST —	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
			A	PRODUCTION RELEASE	03 SEP 08	BJR	MKS	

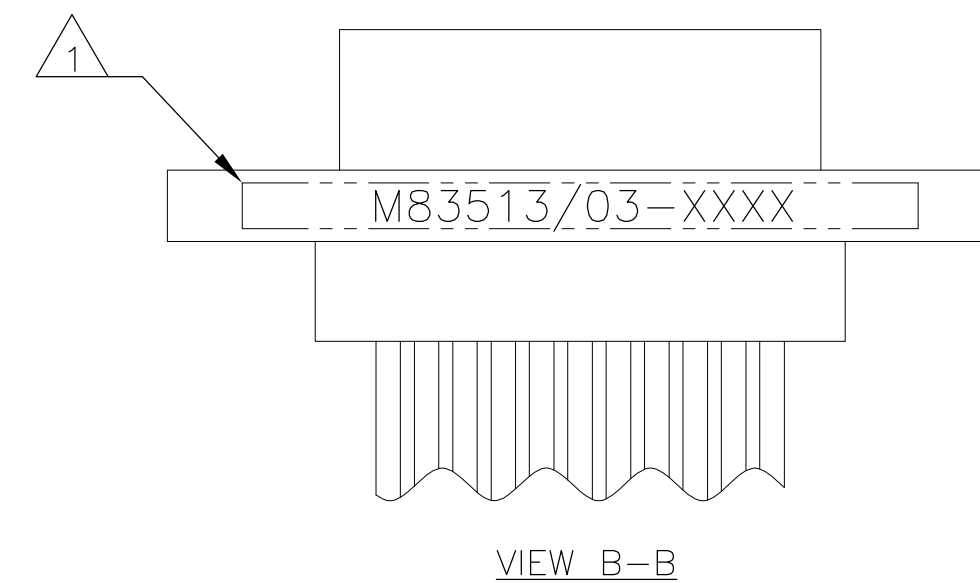

INTERFACE DETAIL

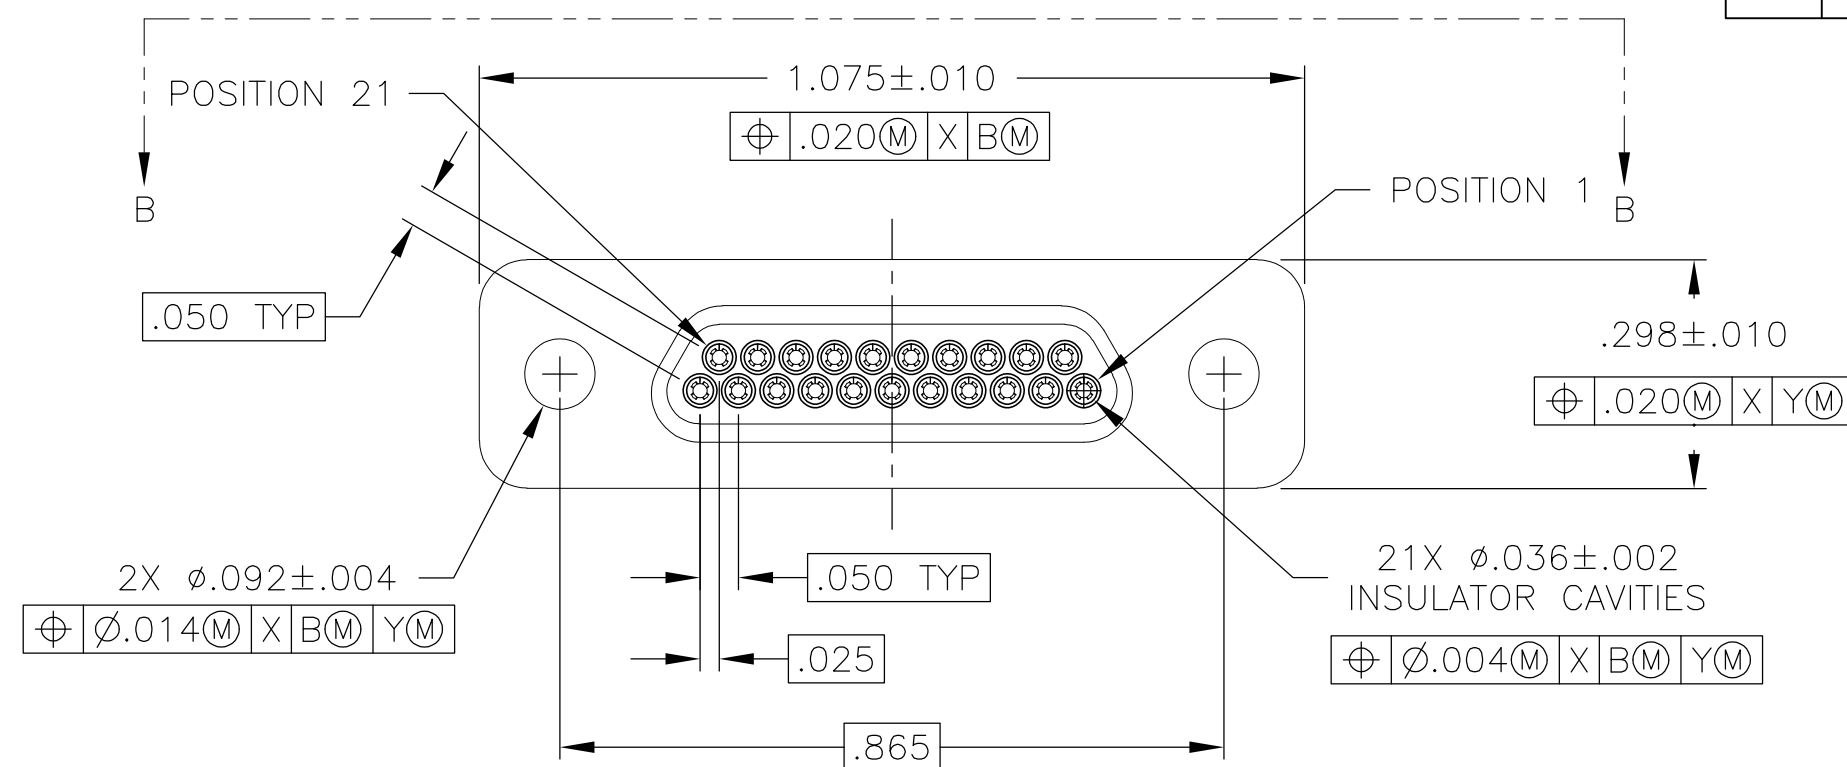

SECTION A-A

- | | |
|---|--|
| 1 | CONNECTOR SHALL BE MARKED IN ACCORDANCE WITH METHOD I OF MIL-STD-1285. MARKING SHALL CONTAIN THE MILITARY PIN, CAGE CODE (OR TE), AND DATE CODE. EXAMPLE: M83513/03-XXXX TE YYWW (WHERE XXXX IS PART OF THE PIN SHOWN IN THE "MIL-DTL-83513" COLUMN OF THE PART NUMBER TABLE, AND YYWW IS THE DATE CODE). FOR THE SIZE 21 PLUG, THE MARKING MUST BE PRINTED ON BOTH SIDES OF THE FLANGE. TEXT HEIGHT SHALL BE .035 INCH MINIMUM. |
| 2 | POSITION 1 SHALL BE INDICATED BY AN IDENTIFIABLE MARK, LOCATED APPROXIMATELY AS SHOWN ON THE POSITION 1 SIDE OF THE CONNECTOR FLANGE. THIS MARK SHALL BE INCLUDED AS PART OF THE PART MARKING INFORMATION. |
| 3 | LENGTH IS SHOWN IN THE "L DIM" COLUMN OF THE PART NUMBER TABLE. LENGTH TOLERANCE IS +1.0/-0.0 FOR INSULATED WIRE TERMINATIONS, AND +0.20/-0.00 FOR UNINSULATED WIRE TERMINATIONS |
| 4 | INSULATED WIRE IS SHOWN FOR REFERENCE ONLY. PART MAY BE TERMINATED WITH INSULATED OR UNINSULATED WIRE ACCORDING TO THE PART NUMBER TABLE. |
| 5 | EPOXY ENCAPSULATION. EPOXY MAY WICK .125 INCH MAX FOR INSULATED WIRE, AND .050 INCH MAX FOR UNINSULATED WIRE. |
| 6 | ALL DIMENSIONS AND REQUIREMENTS ARE PER MIL-DTL-83513/3 |

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. ROMANCHUK 03 SEP 08 CHK —		 Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		APD M. STORRY 03 SEP 08		PLUG ASSEMBLY, MICRO-D PER MIL-DTL-83513/03, MCKS SERIES 21 POSITION			
		PRODUCT SPEC					
		APPLICATION SPEC					
		—					
0 PLC ± — 1 PLC ± — 2 PLC ± .010 3 PLC ± .005 4 PLC ± — ANGLES ± 1°		SIZE		CAGE CODE	DRAWING NO		
MATERIAL SEE NOTES		FINISH —		WEIGHT —		RESTRICTED TO —	
		CUSTOMER DRAWING		A2	98278	C-1532181	
				SCALE	4:1	SHEET	1 of 2
				REV	A		

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , -
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.		

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	OWN	APVD
			—	SEE SHEET 1	—	—	—

TE PART NUMBER				
	L DIM	MIL-DTL-83513 PIN	MICRODOT P/N	MCKS DESCRIPTION
1532181-1	18	M83513/03-C01N	094-6325-0001	MCKS-N1-B-21P6G1-18.0
1532181-2	36	M83513/03-C02N	094-6325-0002	MCKS-N1-B-21P6G1-36.0
1532181-3	18	M83513/03-C03N	094-6325-0003	MCKS-N1-B-21P6G9-18.0
1532181-4	36	M83513/03-C04N	094-6325-0004	MCKS-N1-B-21P6G9-36.0
1532181-5	18	M83513/03-C09N	094-6325-0009	MCKS-N1-B-21P6Q1-18.0
1532181-6	36	M83513/03-C10N	094-6325-0010	MCKS-N1-B-21P6Q1-36.0
1532181-7	18	M83513/03-C11N	094-6325-0011	MCKS-N1-B-21P6Q9-18.0
1532181-8	36	M83513/03-C12N	094-6325-0012	MCKS-N1-B-21P6Q9-36.0
1532181-9	72	M83513/03-C13N	094-6325-0013	MCKS-N1-B-21P6G1-72.0
1-1532181-0	72	M83513/03-C14N	094-6325-0014	MCKS-N1-B-21P6G9-72.0
1-1532181-1	72	M83513/03-C15N	094-6325-0015	MCKS-N1-B-21P6Q1-72.0
1-1532181-2	72	M83513/03-C16N	094-6325-0016	MCKS-N1-B-21P6Q9-72.0
1-1532181-3	0.5	M83513/03-C05N	094-6325-0005	MCKS-N1-B-21P5L4-0.5
1-1532181-4	1.0	M83513/03-C06N	094-6325-0006	MCKS-N1-B-21P5L4-1.0
1-1532181-5	0.5	M83513/03-C07N	094-6325-0007	MCKS-N1-B-21P5L5-0.5
1-1532181-6	1.0	M83513/03-C08N	094-6325-0008	MCKS-N1-B-21P5L5-1.0
1-1532181-7	18	M83513/03-C01C	094-6335-0001	MCKS-C2-B-21P6G1-18.0
1-1532181-8	36	M83513/03-C02C	094-6335-0002	MCKS-C2-B-21P6G1-36.0
1-1532181-9	18	M83513/03-C03C	094-6335-0003	MCKS-C2-B-21P6G9-18.0
2-1532181-0	36	M83513/03-C04C	094-6335-0004	MCKS-C2-B-21P6G9-36.0
2-1532181-1	0.5	M83513/03-C05C	094-6335-0005	MCKS-C2-B-21P5L4-0.5
2-1532181-2	1.0	M83513/03-C06C	094-6335-0006	MCKS-C2-B-21P5L4-1.0
2-1532181-3	0.5	M83513/03-C07C	094-6335-0007	MCKS-C2-B-21P5L5-0.5
2-1532181-4	1.0	M83513/03-C08C	094-6335-0008	MCKS-C2-B-21P5L5-1.0
2-1532181-5	18	M83513/03-C09C	094-6335-0009	MCKS-C2-B-21P6Q1-18.0
2-1532181-6	36	M83513/03-C10C	094-6335-0010	MCKS-C2-B-21P6Q1-36.0
2-1532181-7	18	M83513/03-C11C	094-6335-0011	MCKS-C2-B-21P6Q9-18.0
2-1532181-8	36	M83513/03-C12C	094-6335-0012	MCKS-C2-B-21P6Q9-36.0
2-1532181-9	72	M83513/03-C13C	094-6335-0013	MCKS-C2-B-21P6G1-72.0
3-1532181-0	72	M83513/03-C14C	094-6335-0014	MCKS-C2-B-21P6G9-72.0
3-1532181-1	72	M83513/03-C15C	094-6335-0015	MCKS-C2-B-21P6Q1-72.0
3-1532181-2	72	M83513/03-C16C	094-6335-0016	MCKS-C2-B-21P6Q9-72.0

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 03 SEP 08 B. ROMANCHUK CHK —		 Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 03 SEP 08 M. STORRY		NAME	
		0 PLC ± —		PRODUCT SPEC		MICRO-D PER MIL-DTL-83513/03, MCKS SERIES 21 POSITION	
		1 PLC ± —		—			
		2 PLC ± —		APPLICATION SPEC			
		3 PLC ± —		—			
4 PLC ± —		ANGLES ± —		WEIGHT —		RESTRICTED TO	
MATERIAL —		FINISH —		A2 98278		DRAWING NO C-1532181	
CUSTOMER DRAWING				SCALE 4:1		SHEET 2 of 2	
						REV A	

1532181

11

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

<u>M83513/03-C05N</u>	<u>M83513/03-C11C</u>	<u>M83513/03-C01C</u>	<u>M83513/03-C01N</u>	<u>M83513/03-C06C</u>	<u>M83513/03-C14N</u>
<u>M83513/03-C13N</u>	<u>M83513/03-C10N</u>	<u>M83513/03-C09C</u>	<u>M83513/03-C02N</u>	<u>M83513/03-C15N</u>	<u>M83513/03-C13C</u>
<u>M83513/03-C05C</u>	<u>M83513/03-C02C</u>	<u>M83513/03-C10C</u>	<u>M83513/03-C06N</u>	<u>M83513/03-C12N</u>	<u>M83513/03-C07C</u>
<u>M83513/03-C09N</u>	<u>M83513/03-C08C</u>	<u>M83513/03-C04C</u>	<u>M83513/03-C15C</u>	<u>M83513/03-C16N</u>	<u>M83513/03-C14C</u>
<u>M83513/03-C12C</u>	<u>M83513/03-C16C</u>	<u>M83513/03-C08N</u>	<u>M83513/03-C11N</u>		