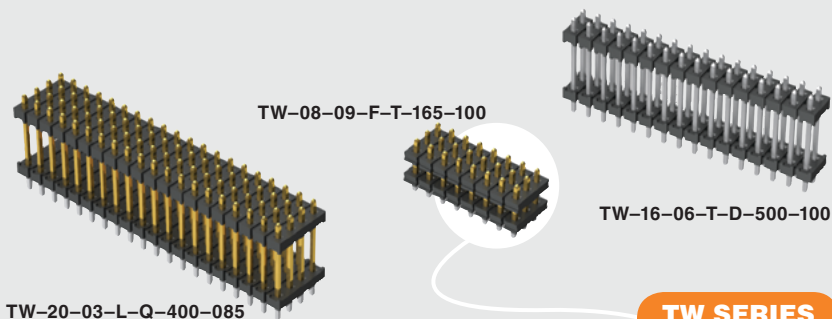


**TW SERIES**

THROUGH-HOLE BOARD STACKERS

Lea
Yes

RI[®]
FILE NO. E111594

A diagram of a four-pin connector. It consists of a single horizontal row of four pins. The pins are connected to a central horizontal bar, which is then connected to a larger rectangular base. The base has four pins extending downwards, mirroring the top row.

- Other platings

(2.00 mm)
.0787 pitch

- Choice of one through six rows

TW
NO. PINS PER ROW
LEAD STYLE
PLATING OPTION
ROW OPTION
STACKER HEIGHT
TAIL SPEC

02 thru 50

Specify LEAD STYLE from chart below.

—F
= Gold flash on post, Matte Tin on tail

—L
= 10 μ" (0.25 μm) Gold on post, Matte Tin on tail

—T
= Matte Tin

—S
= Single Row

—D
= Double Row

—T
= Triple Row

—Q
= Four Row

—5
= Five Row

—6
= Six Row

—“XXX”
= Stacker Height in inches (.013 mm) .005 increments
Example: —250 = (6.35 mm) .250"

—“XXX”
= Tail Length in inches (0.13 mm) .005 increments
Example: —150 = (3.81 mm) .150"

—“XXX”
= Polarized Position (Specify position to be removed)

LEAD STYLE	OAL
—01	(8.20) .323
—02	(9.60) .377
—03	(13.60) .535
—04	(14.10) .555
—05	(15.10) .594
—06	(17.10) .673
—07	(19.10) .751
* —08	(21.10) .830
* —09	(11.60) .456
—10	(15.60) .614
—11	(10.08) .397
* —12	(28.19) 1.110

* Style —08 & —12 = S & D only

ROW OPTION	STACKER HEIGHT
—S, —D*, & —Q	(3.05) .120 MIN
—T, —5, —6	(4.06) .160 MIN

* —D with stacker height greater than (4.06 mm) .160" will not have standoffs.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[TW-05-11-T-D-185-106](#)