
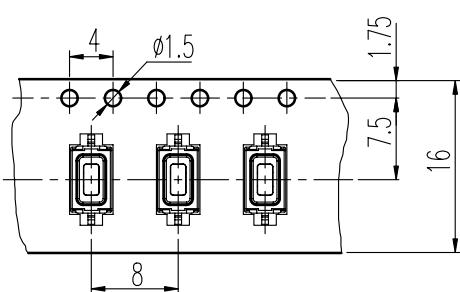
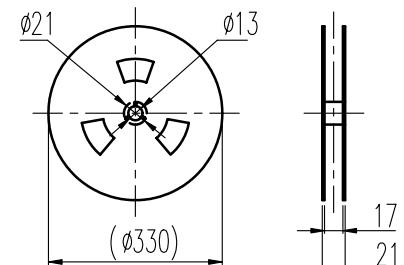
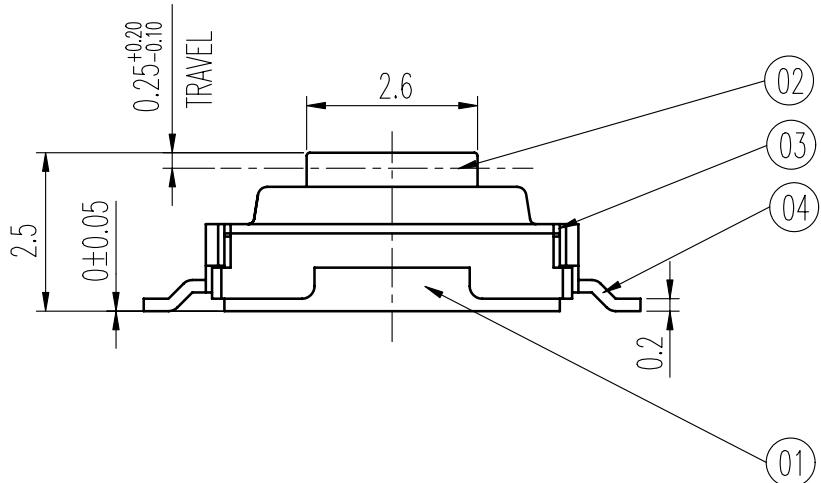


FORCE (gf)		KNOB COLOR
1	180 ± 50	NATURAL(NA)
3	250 ± 50	BLUE(BU)

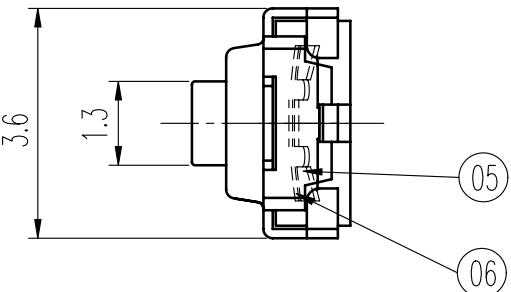


Total 3,000 pcs for one Reel.

规格 Specifications

额定负载 Ratings	DC 12 V 50m A
初期接触电阻 Initial Contact Resistance	100 mΩ Max.
绝缘电阻 Insulation Resistance	DC 100 V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric	AC 250 V (50~60Hz) 60 Sec.
操作力 Operating Force	见上表
负荷寿命 Operating Life With Load	50,000 次 Cycles

1P - 1T
示意图 SCHEMATIC



安装孔 PIERCING PLAN

06	防尘膜 DUST COVER	POLYIMIDE ⑥	1	NATURAL
05	弹片 SPRING	SUS	1	Ag CLAD
04	端子 TERMINAL	C2680R	2	Ag PLATED
03	盖片 COVER	SUS	1	NATURAL
02	胶柄 KNOB	PA	1	
01	胶壳 HOUSING	PA	1	BLACK C
序号 NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS

A05	防尘膜材料由PTEE变更为POLYIMIDE, 见 ⑥	张渠江	2010-08-11
A04	增加材料表栏第6项见 ⑦	杨蝶	2007-12-19
A03	变更见 ⑧	刘红梅	2006-4-8
A02	变更见 ⑨	郭国良	2005-12-30
A01	变更见 ⑩	陶海平	2005-9-13
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE

DWG NO. ITEM2325

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE		TACT SWITCH		ITEM NO	RS-282G05A -SM RT	
UNDER 1	± 0.10	DRAWN	张渠江	2010-08-11	VERSION	A05	PAGE 1 OF 1	
1 - 10	± 0.30	REVIEWED	王光云	2010-08-11	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	马建和	2010-08-11	PROJECTION			

COMAX

高铭电子(惠州)有限公司
Comax Electronics(Huizhou)Co.,Ltd.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Switches:

[RS-282G05A3-SM RT](#) [RS282G05A3SMRT](#)