

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0022282354

Status:

Active

Overview:

KK® Interconnect System - Molex

Description:

KK 254 Breakaway Header, Right-Angle, with Plastic Polarizing Peg, 35 Circuits, Tin (Sn) Plating. with Kinked PC Tails

Replacement Part Number:

http://www.molex.com/molex/products/listview.jsp?channel=Products&sType=p&query=002228135322-28-1353 see comments

Documents:


3D Model

Drawing (PDF)

Product Specification PS-10-07-001 (PDF)

RoHS Certificate of Compliance (PDF)

|                                |                                                                                                                                                                                          |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Agency Certification           |                                                                                                                                                                                          |
| CSA                            | LR19980                                                                                                                                                                                  |
| UL                             | E29179                                                                                                                                                                                   |
| General                        |                                                                                                                                                                                          |
| Product Family                 | PCB Headers                                                                                                                                                                              |
| Series                         | 42226                                                                                                                                                                                    |
| Application                    | Signal, Wire-to-Board                                                                                                                                                                    |
| Application Tooling Part Link  | 11-20-1230                                                                                                                                                                               |
| Comments                       | Original part has a polarized backwall, replacement has friction lock backwall. Pin length of FKL header is .720" vs. .685" of polarized version. Plating and other dimensions are same. |
| Overview                       | KK® Interconnect System - Molex                                                                                                                                                          |
| Product Name                   | KK 254                                                                                                                                                                                   |
| Replacement Part Number        | 22-28-1353 see comments                                                                                                                                                                  |
| UPC                            | 800753812765                                                                                                                                                                             |
| Physical                       |                                                                                                                                                                                          |
| Breakaway                      | Yes                                                                                                                                                                                      |
| Circuits (Loaded)              | 35                                                                                                                                                                                       |
| Circuits (maximum)             | 35                                                                                                                                                                                       |
| Color - Resin                  | Black                                                                                                                                                                                    |
| Durability (mating cycles max) | 25                                                                                                                                                                                       |
| Flammability                   | 94V-0                                                                                                                                                                                    |
| Glow-Wire Capable              | No                                                                                                                                                                                       |
| Lock to Mating Part            | None                                                                                                                                                                                     |
| Material - Metal               | Brass                                                                                                                                                                                    |
| Material - Plating Mating      | Tin                                                                                                                                                                                      |
| Material - Plating Termination | Tin                                                                                                                                                                                      |
| Material - Resin               | Nylon                                                                                                                                                                                    |
| Net Weight                     | 4.796/g                                                                                                                                                                                  |
| Number of Rows                 | 1                                                                                                                                                                                        |
| Orientation                    | Right Angle                                                                                                                                                                              |
| PC Tail Length                 | 3.43mm                                                                                                                                                                                   |
| PCB Locator                    | No                                                                                                                                                                                       |
| PCB Retention                  | Yes                                                                                                                                                                                      |
| PCB Thickness - Recommended    | 1.60mm                                                                                                                                                                                   |
| Packaging Type                 | Bag                                                                                                                                                                                      |
| Pitch - Mating Interface       | 2.54mm                                                                                                                                                                                   |
| Plating min - Mating           | 2.540µm                                                                                                                                                                                  |
| Plating min - Termination      | 2.540µm                                                                                                                                                                                  |
| Polarized to Mating Part       | No                                                                                                                                                                                       |
| Polarized to PCB               | No                                                                                                                                                                                       |
| Shrouded                       | No                                                                                                                                                                                       |

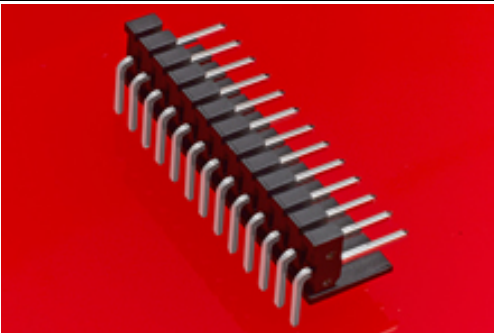

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

42226 Series

Mates With

KK Crimp Housing [2695](#) , [6471](#) , [7880](#) , KK PC Board Connector [4455](#)

|                                                |                                |
|------------------------------------------------|--------------------------------|
| Stackable                                      | No                             |
| Temperature Range - Operating                  | See Product Specification      |
| Termination Interface: Style                   | Through Hole                   |
| <b>Electrical</b>                              |                                |
| Current - Maximum per Contact                  | 4.0A                           |
| Voltage - Maximum                              | 500V                           |
| <b>Solder Process Data</b>                     |                                |
| Duration at Max. Process Temperature (seconds) | 005                            |
| Lead-freeProcess Capability                    | WAVE                           |
| Max. Cycles at Max. Process Temperature        | 001                            |
| Process Temperature max. C                     | 235                            |
| <b>Material Info</b>                           |                                |
| Engineering Number                             | 42226-0140                     |
| <b>Reference - Drawing Numbers</b>             |                                |
| Product Specification                          | PS-10-07-001                   |
| Sales Drawing                                  | SD-42226-001, SD-42226-001-002 |

This document was generated on 09/18/2018

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[22-28-2354](#)