


CONNETTORE TIPO B (CON MOLLA DI RITEGNO INTERNA)  
CONNECTOR TYPE B (WITH INTERNAL SPRING)

SCALA NON IMPEGNATIVA  
(DO NOT SCALE)  
DIMENSIONI IN mm  
(DIMENSIONS IN mm)

METRIC

PROIEZIONE EUROPEA  
(EUROPEAN PROJECTION)

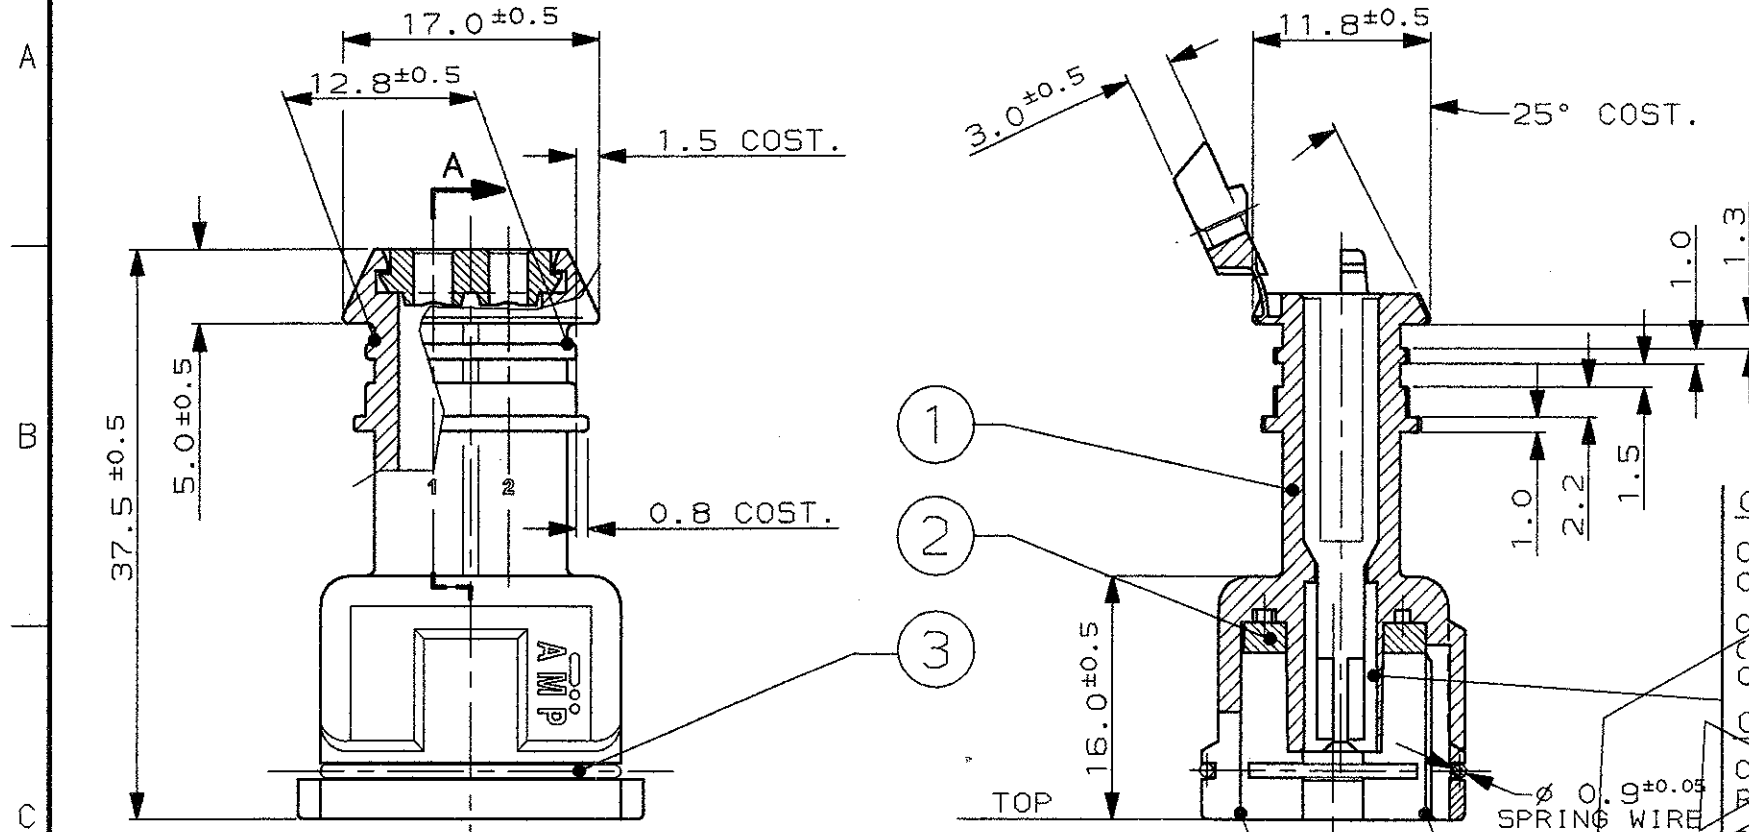

SEZIONE A-A  
(SECTION A-A)

CAVITA' ADATTA PER TERMINALI JUNIOR POWER TIMER:

CONTATTO P/N 929939-1 0 -3 CON GOMMINO P/N 828904-1  
CAVO ISOLANTE RIDOTTO Ø1.5-2.1mm; SEZIONE 0.5-1.0mm<sup>2</sup>

CONTATTO P/N 929937-1 0 -3 CON GOMMINO P/N 828905-1  
(O GOMMINO P/N 282536-1 SOLO PER CAVI SEZIONE 2.5mm<sup>2</sup>)  
CAVO ISOLANTE RIDOTTO Ø2.2-3.0mm; SEZIONE 1.5-2.5mm<sup>2</sup>


CAVITY SUITABLE FOR JUNIOR POWER TIMER CONTACT:

CNT. P/N 929939-1 OR -3 PLUS WIRE SEAL P/N 828904-1  
REDUCED INS. CABLE Ø1.5-2.1mm; WIRE RANGE 0.5-1.0mm<sup>2</sup>

CNT. P/N 929937-1 OR -3 PLUS WIRE SEAL P/N 828905-1  
(OR WIRE SEAL P/N 282536-1 ONLY FOR WIRE SECT. 2.5 mm<sup>2</sup>)  
REDUCED INS. CABLE Ø2.2-3.0mm; WIRE RANGE 1.5-2.5mm<sup>2</sup>

- PER DIMENSIONI CONTROPARTE VEDERE FOGLIO 2 DI 2.  
(- FOR PIN HEADER DIMENSIONS SEE SHEET 2 OF 2).

PASSO 5.0±0.15  
(PITCH 5.0±0.15)

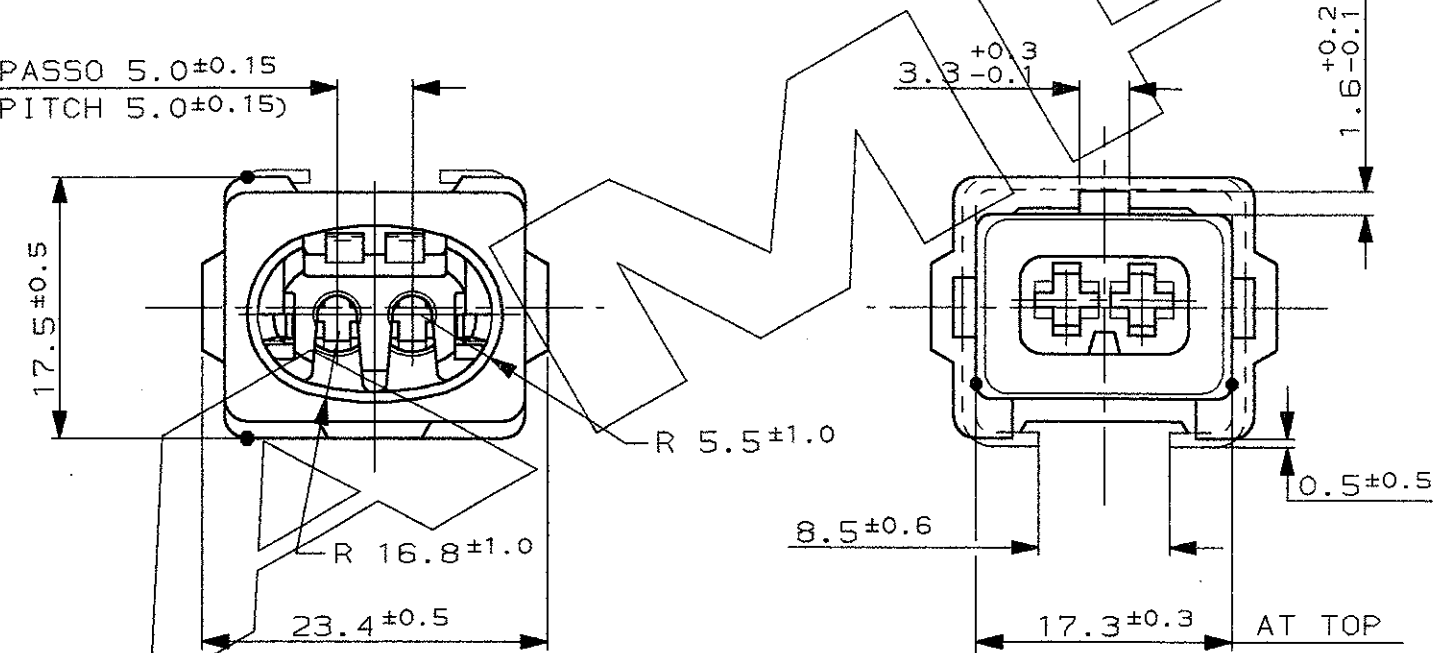

VISTA DA K  
(VIEW FROM K)

|                  |          |
|------------------|----------|
| ROSSO (RED)      | 282788-8 |
| GIALLO (YELLOW)  | 282788-7 |
| MARRONE (BROWN)  | 282788-6 |
| BLU (BLUE)       | 282788-5 |
| VERDE (GREEN)    | 282788-4 |
| NATURALE (NATUR) | 282788-3 |
| GRIGIO (GREY)    | 282788-2 |
| NERO (BLACK)     | 282788-1 |

| COLORE<br>(COLOR) | NUMERO<br>(PART N°.) |
|-------------------|----------------------|
|-------------------|----------------------|

| 3            | //////                                 | ACCIAIO INOX<br>(STAINLESS STEEL) | MOLLA (SPRING)                 |
|--------------|----------------------------------------|-----------------------------------|--------------------------------|
| 2            | NATURALE<br>(NATURAL)                  | GOMMA (RUBBER)                    | GUARNIZIONE<br>(RUBBER GASKET) |
| 1            | //////                                 | PA 6.6                            | BLOCCHETTO<br>(HOUSING)        |
| N°<br>(ITEM) | FINITURA / COLORE<br>(FINISH / COLOUR) | MATERIALE<br>(MATERIAL)           | DESCRIZIONE<br>(DESCRIPTION)   |

CUSTOMER DWG.  
FOR REFERENCE ONLY

DISEGNO PER CLIENTE  
SOLO PER RIFERIMENTO



THIS DRAWING IS UNPUBLISHED - RELEASE FOR PUBLICATION 19  
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT  
RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING

|                                                                                               |                                                                        |                                                       |                         |
|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------|-------------------------------------------------------|-------------------------|
| TOLLERANZE, SE NON<br>DIVERSAMENTE SPECIFICATO<br>(TOLERANCES, UNLESS<br>OTHERWISE SPECIFIED) | DIAM. ISOLANTE<br>(INS. DIA. RANGE)<br>1.5-3.0<br>(REDUCED INS. CABLE) | RANGO FILO<br>(WIRE RANGE)<br>0.5-2.5 mm <sup>2</sup> | SCALA<br>(SCALE)<br>*** |
|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------|-------------------------------------------------------|-------------------------|

|                     |                                                                |                   |                |                                        |
|---------------------|----------------------------------------------------------------|-------------------|----------------|----------------------------------------|
| C                   | ECR-14-003472                                                  | MP                | 24MAR<br>2014  | ± 0.3                                  |
| B                   | IN PRODUZIONE<br>(RELEASED FOR PRODUCTION)<br>EC ET00-0325-96  | A.F.              | 26 JUL<br>'96  | ANGOLI<br>(ANGLES)<br>± 2°             |
| A1                  | REVISED PER EC ET00-0096                                       | A.F.              | 26 FEB<br>'96  | DIS. 22 DEC 95<br>(DR.)<br>R. MARTINI  |
| A                   | FIRST ISSUE<br>PER EC ET00-0004-96<br>(PROP. NO. WAS 95-51276) | R.M.              | 03-01<br>96    | CONT. 22 DEC 95<br>(CHK)<br>C. TARTARI |
| REV.<br>(REV. LTR.) | REVISIONI<br>(REVISION RECORD)                                 | DIS. DATA<br>(DR) | DATA<br>(DATE) | APP. (APP.)                            |

|                                                                                        |  |      |      |                       |      |                                  |
|----------------------------------------------------------------------------------------|--|------|------|-----------------------|------|----------------------------------|
| DESCRIZIONE<br>(DESCRIPTION)<br>2 POS. SPLASH PROOF CONN. ASS'Y<br>with SECONDARY LOCK |  | LOC. | SIZE | NUMERO<br>(CONEG NO.) | REV. | FOGLIO<br>(SHEET)<br>D1<br>(COP) |
|                                                                                        |  | I    | A3   | C-282788              | C    | 1                                |

DISTRIBUZIONE  
(PRINT DIST.)

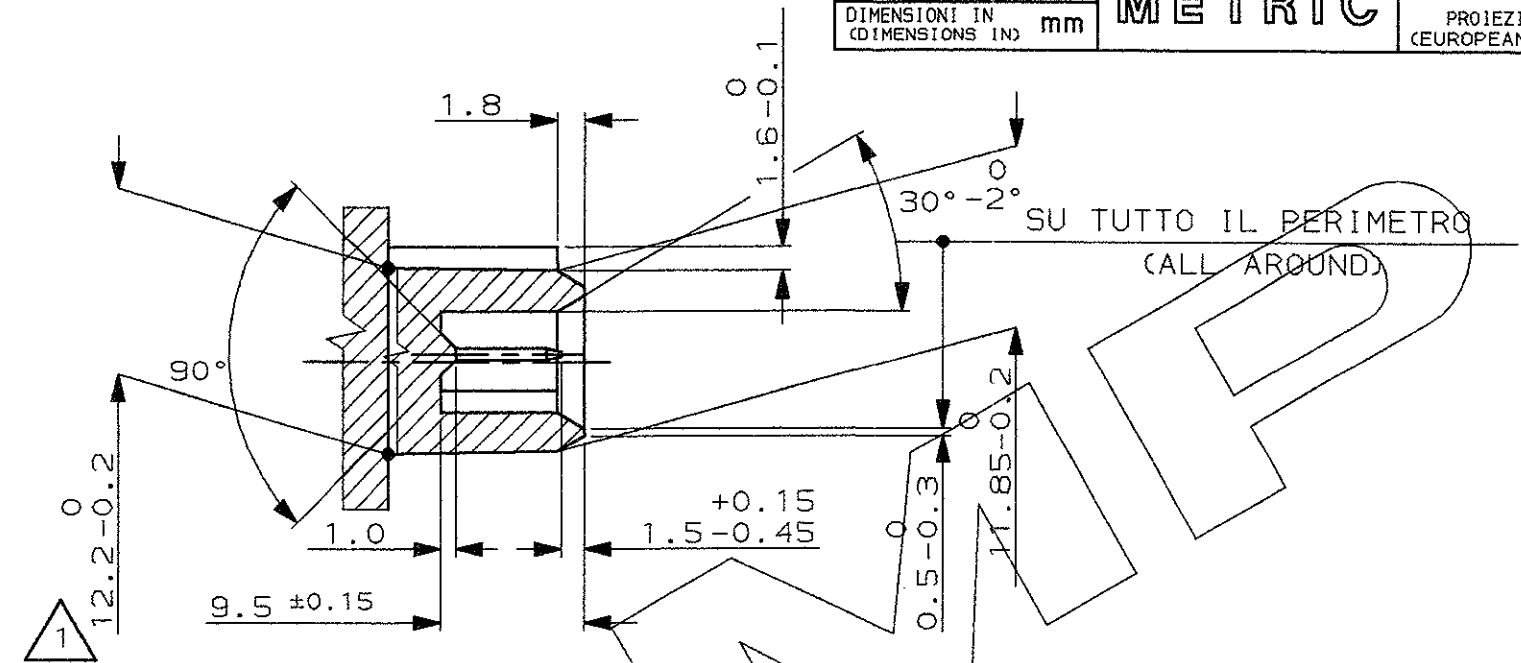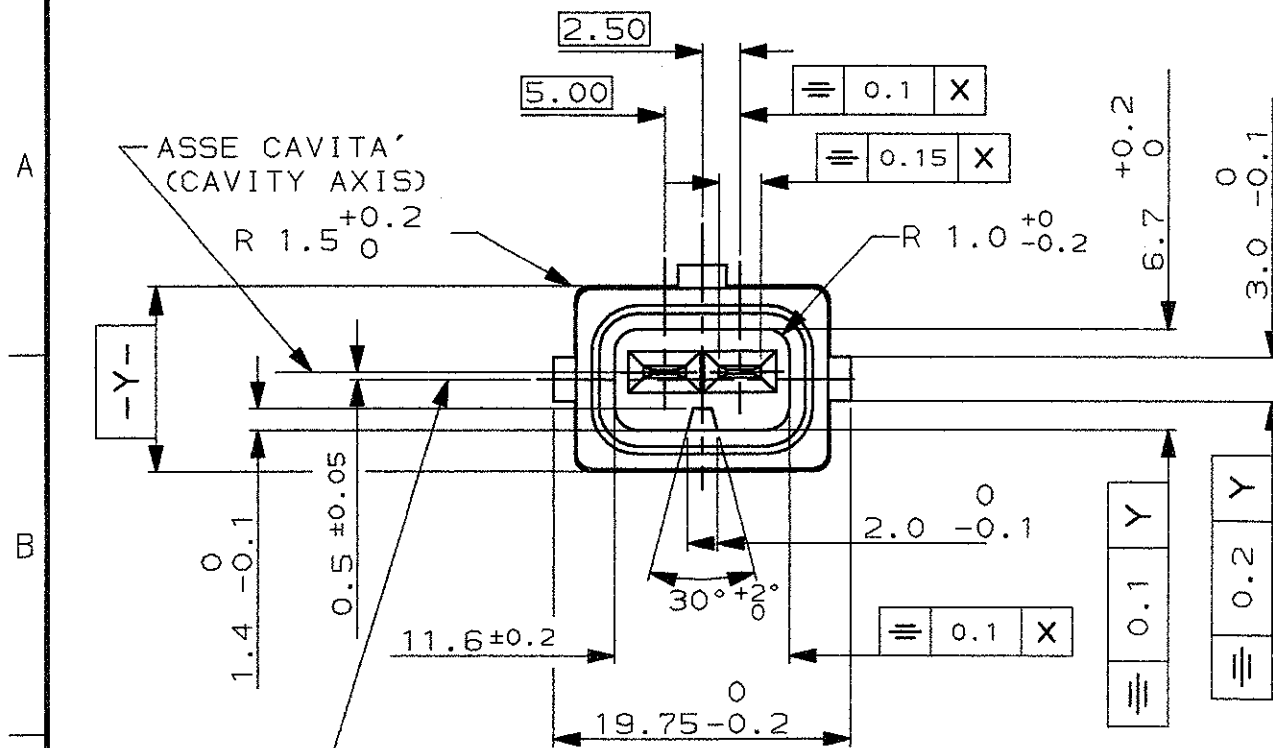


DETT. CONTATTO SC. 5:1  
(TAB DETAIL SC. 5:1)

NOTE (NOTES):

- QUOTE APPLICABILI PER SFORMATURA PEZZO  
(RIGHT DIMENSIONS FOR EXTRACTION ITEM FROM THE MOULD)
- MATERIALE CONTATTI: LEGA DI RAME STAGNATA, ES. OTTONE STAGNATO.  
(TAB MATERIAL: TINNED CU ALLOY, E.G. TINNED BRASS)
- MATERIALE BLOCCHETTO: TERMOPLASTICO CARICATO FIBRA VETRO.  
(HOUSING MATERIAL: THERMOPLASTIC GLASS FIBER FILLED).

FORMA ALTERNATIVA PERMESSA CON RAGGIO  
(ALLOWED ALTERNATIVE PROFILE WITH RADIUS)

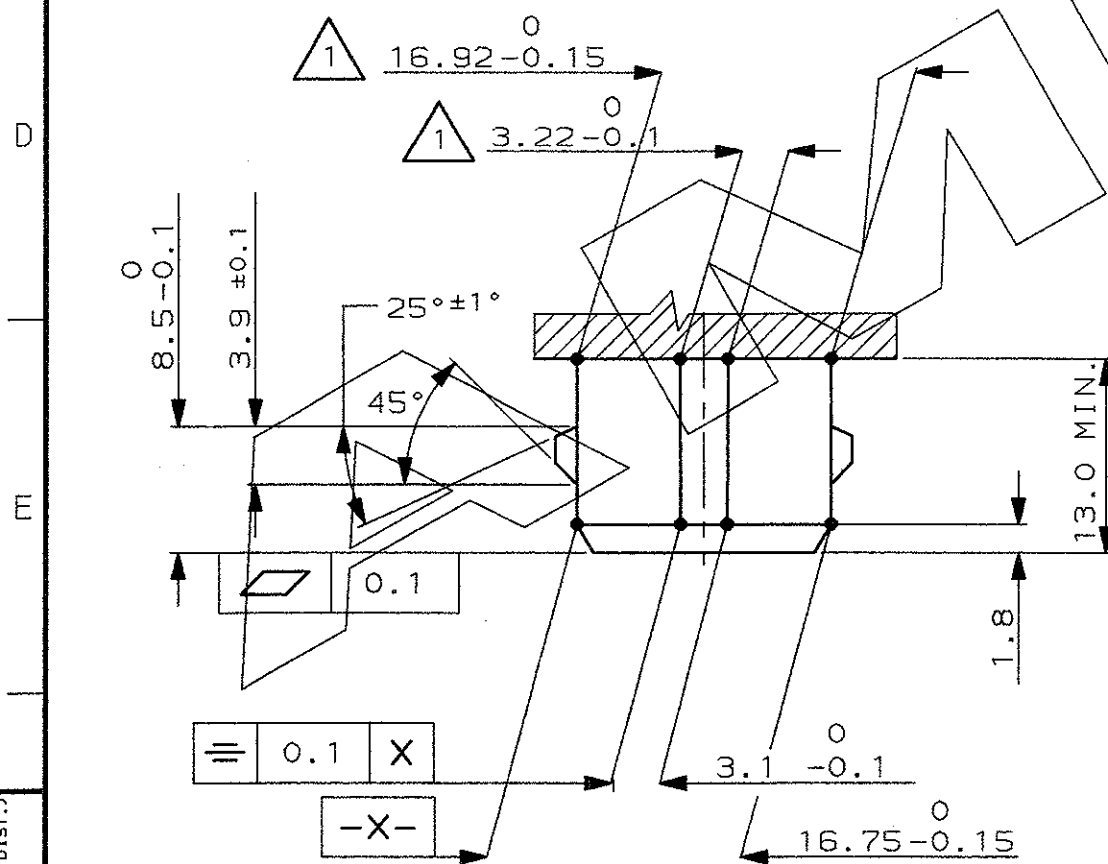

|                                                                                                                                                                    |  |                                                                                         |  |                                     |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------|--|-------------------------------------|--|
| FINITURA / COLORE<br>(FINISH / COLOUR)                                                                                                                             |  | MATERIALE<br>(MATERIAL)                                                                 |  | NUMERO<br>(PART NUMBER)             |  |
| CUSTOMER DWG.<br>FOR REFERENCE ONLY                                                                                                                                |  | DISEGNO PER CLIENTE<br>SOLO PER RIFERIMENTO                                             |  | 19                                  |  |
| THIS DRAWING IS UNPUBLISHED                                                                                                                                        |  | RELEASE FOR PUBLICATION                                                                 |  | 19                                  |  |
| © COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING |  | TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO<br>(TOLERANCES, UNLESS OTHERWISE SPECIFIED) |  | DIAM. ISOLANTE<br>(INS. DIA. RANGE) |  |
| ± 0.3                                                                                                                                                              |  | SEE SHEET 1                                                                             |  | RANGO FILO<br>(WIRE RANGE)          |  |
| ANGOLI<br>(ANGLES)                                                                                                                                                 |  | ± 2°                                                                                    |  | SCALA<br>(SCALE)                    |  |
| DIS.<br>(DR.)                                                                                                                                                      |  | SEE SHEET 1 OF 2                                                                        |  | ***                                 |  |
| CONT.<br>(CHK.)                                                                                                                                                    |  | DESCRIZIONE<br>(DESCRIPTION)                                                            |  | TE Connectivity                     |  |
| SEE SHEET 1 OF 2                                                                                                                                                   |  | 2 POS. SPLASH PROOF CONN. ASS'Y<br>with SECONDARY LOCK                                  |  | LOC. SIZE NUMERO<br>(DWG NO)        |  |
| REV. (REV. DATE)                                                                                                                                                   |  | REVISIONI<br>(REVISION RECORD)                                                          |  | DIS. DATA<br>(DR. DATE)             |  |
| APP. (APP.)                                                                                                                                                        |  | I A3 C-282788                                                                           |  | REV. FOGLIO<br>(SHEET)              |  |
|                                                                                                                                                                    |  | 2                                                                                       |  | DI (OF) 2                           |  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[282788-6](#)