

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVO
GP	00						
			A	ORIGINAL	03APR2013	CJV	CWR

D

C

B

A

D

C

B

A

- 1

FOR MINI-APPLICATOR AND STRIPPER CRIMPER.
- 2

FOR HAND TOOL USE ONLY.
- 3




WIRE RANGE OF 24-28, INSULATION RANGE OF .030-.040.
- 4

GOLD PLATING MAY NOT APPEAR ON CARRIER STRIP. NICKEL UNDERPLATE COVERS ENTIRE CONTACT.
- 5

GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290.
- 6

PLATED WITH .000050 GOLD ON INSIDE OF LOCALIZED GOLD PLATE AREA, .000050 GOLD ON ZONE 1, ALL OVER .000050 NICKEL UNDERPLATE.
- 7


PLATED WITH .000050 GOLD ON INSIDE OF LOCALIZED GOLD PLATE AREA, GOLD FLASH ON ZONE 1, ALL OVER .000050 NICKEL UNDERPLATE.

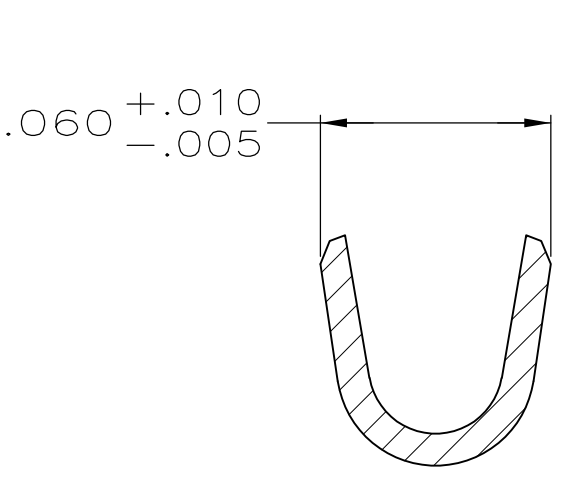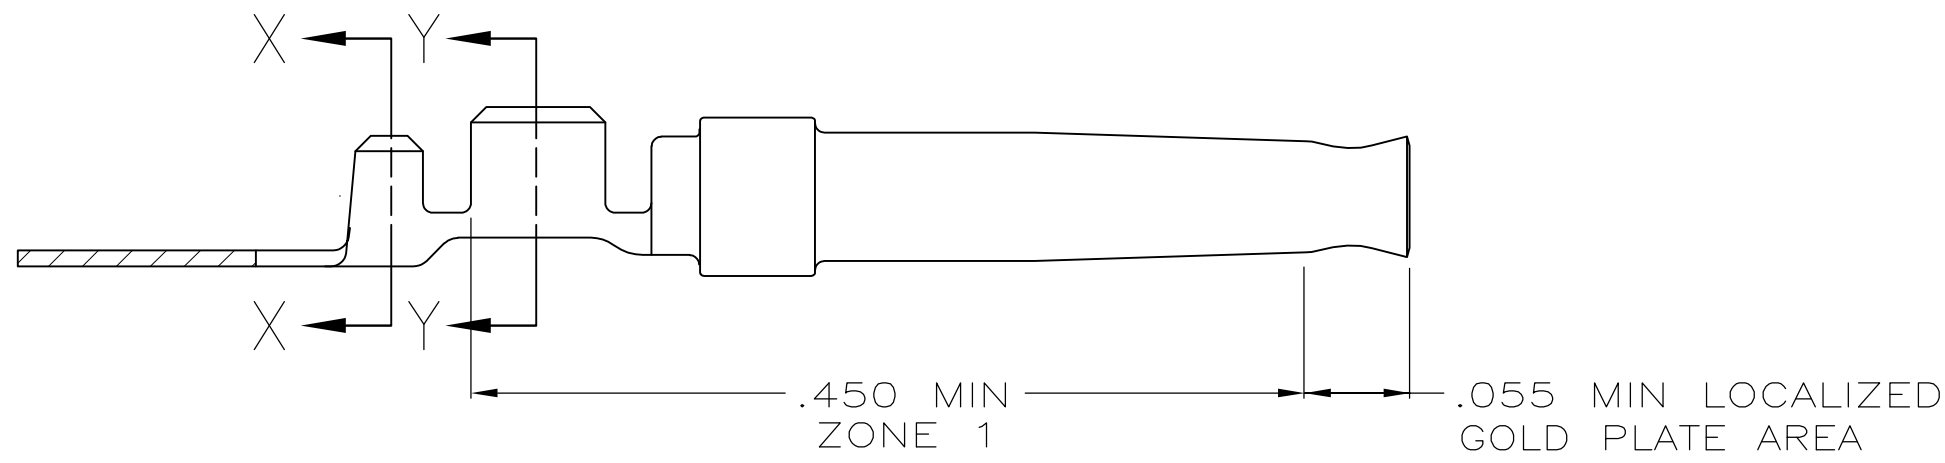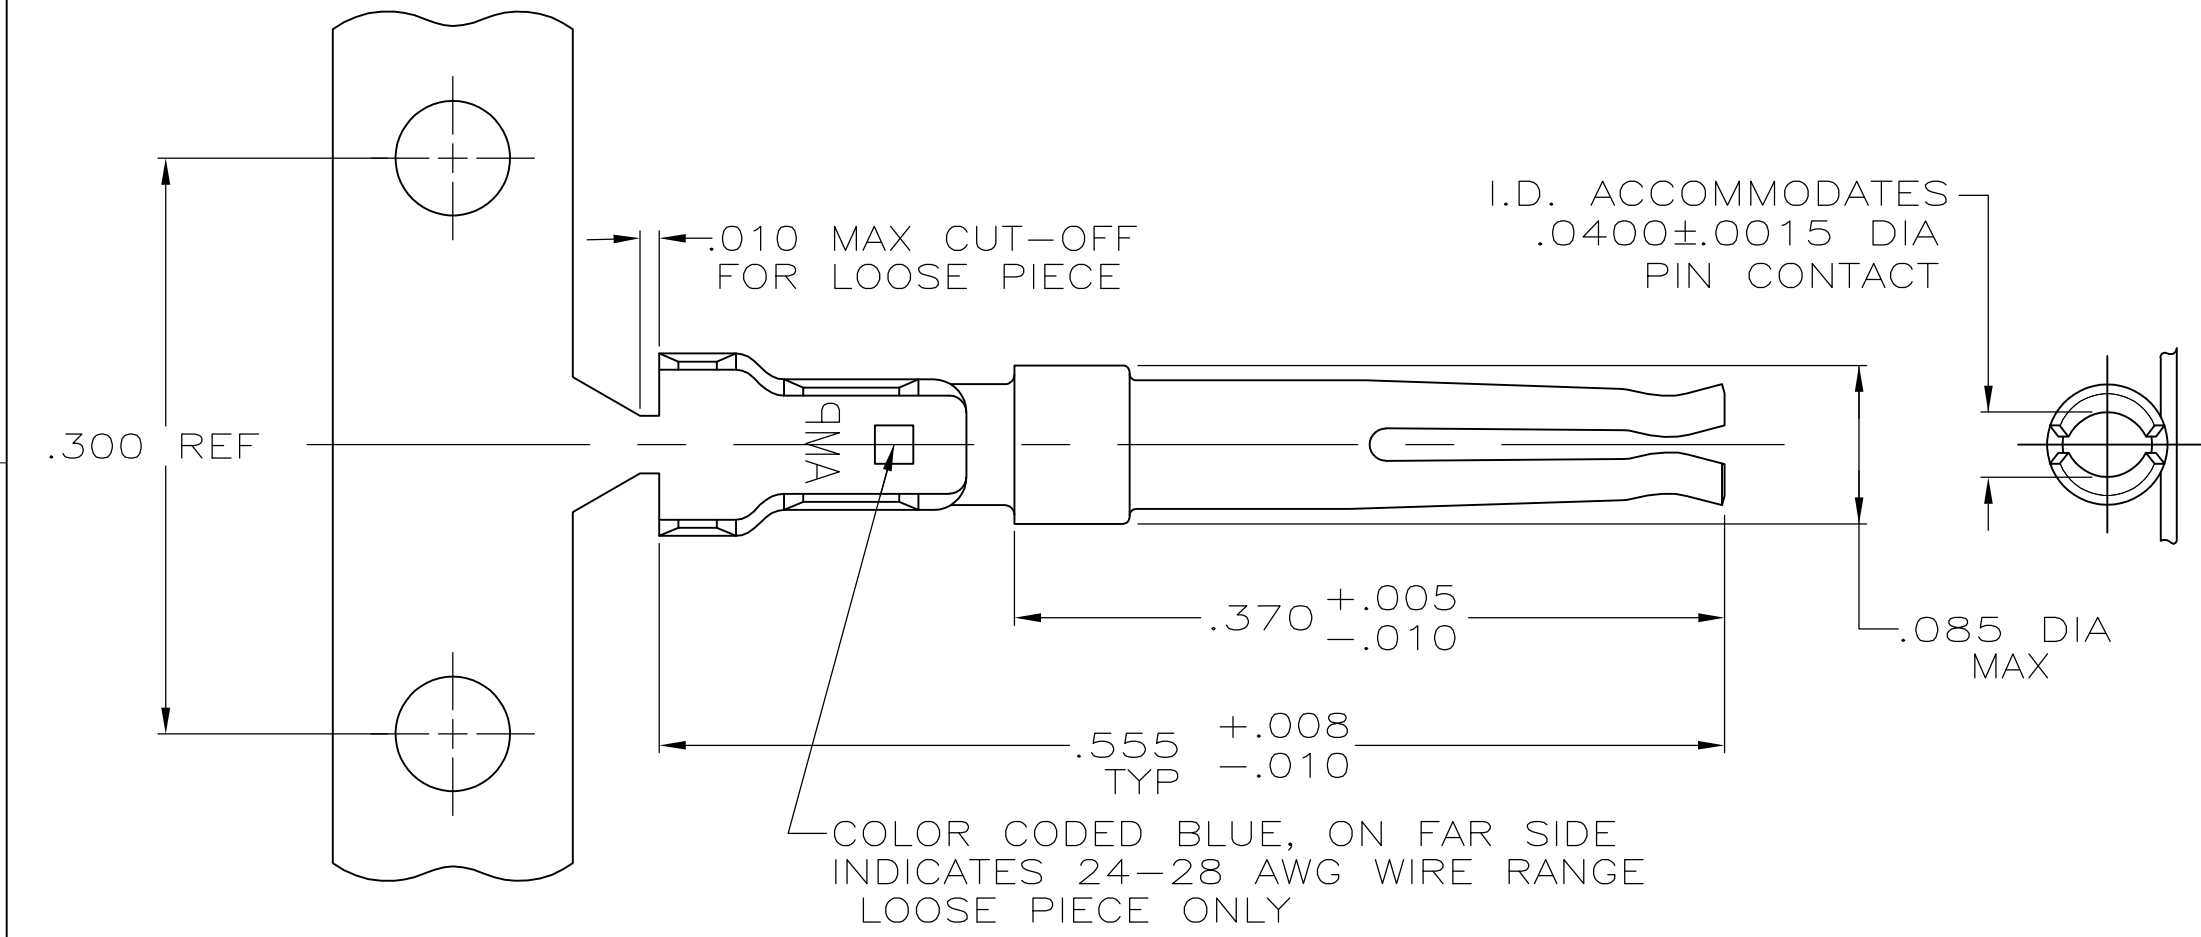

SECTION X-X
SCALE 20:1

SECTION Y-Y
SCALE 20:1

STANDARD	7	1	STRIP	2-66505-7
STANDARD	6	2	LOOSE PIECE	66505-8
STANDARD	6	1	STRIP	66505-2
PACKAGING TYPE	FINISH	USE	TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN C. VALENTINE 03APR2013	 TE Connectivity					
		CHK C. ROHDE 03APR2013						
DIMENSIONS: INCHES		APVD C. ROHDE 03APR2013	NAME SOCKET CONTACT, SIZE 20 DF, 24-28 AWG, W/.030-.040 DIA INSULATION SUPPORT,					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± ±		PRODUCT SPEC —						
		APPLICATION SPEC 114-10000	SIZE	CAGE CODE	DRAWING NO			RESTRICTED TO
MATERIAL PHOSPHOR BRONZE		WEIGHT —	A2	00779	C-66505-2			—
FINISH  SEE TABLE		CUSTOMER DRAWING			SCALE	SHEET	REV	
					10:1	1 of 1	A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[66505-8](#)