


|  |  |
|--|--|
| Material   | High Conductivity<br>Seamless Copper Tube  |
| Plating  | Electro-Tin  |
| Wire Size & Type                                     | Stranded Copper Flex Cable;<br>4/0 AWG (550/24) Diesel<br>Locomotive, 4/0 AWG FLEX K,M<br>Class K & Class M  |
| Wire Strip Length                                    | 1-7/16 in.   |
| Stud Size  | 1/2 in.  |
| UL Listed Wire<br>Connector                          | Yes, for applications up to 35kv.<br>Consult cable manufacturer for<br>voltage stress relief instructions<br>with applications greater than<br>2000 volts. |
| UL Temperature<br>Rating                             | 90 ° C   |
| C.S.A Certified<br>Wire Connector                    | Yes  |
| Panduit Color Code<br>on Barrel                      | YELLOW   |
| Panduit Die Index No.<br>on Barrel                   | P62  |
| Alternate Industry<br>Die Index No. ( )<br>on Barrel | (16)   |



CERTIFIED



LISTED  
Wire Connector

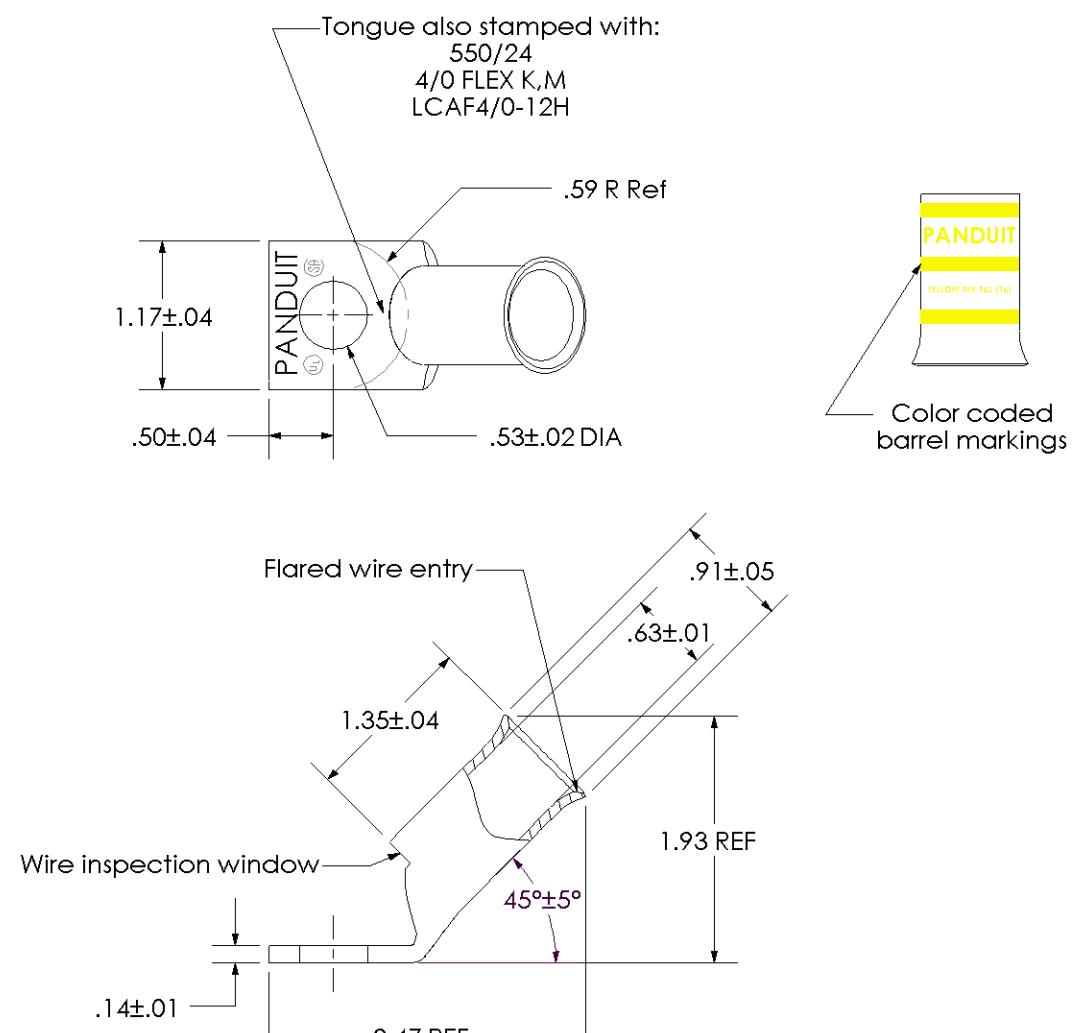

| 00  | 8/02 | SAB | DRL | RELEASED    | 10322 | PANDUIT | CORP. TINLEY PARK, ILLINOIS |
|-----|------|-----|-----|-------------|-------|---------|-----------------------------|
| REV | DATE | BY  | CHK | DESCRIPTION | ECN   | SCALE   | DRAWING NO / CAD FILE       |
|     |      |     |     |             |       | N/A     | LCAF4_0-12H-CUST            |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCAF4/0-12H-X](#)