

THIS DRAWING IS UNPUBLISHED


RELEASED FOR PUBLICATIO

2016

© COPYRIGHT 2016 BY

ALL RIGHTS RESERVED

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	PER ECN NO. 18067	4-11-91	G.D.	G.D.
	D	PER ECO-16-005712	07APR2016	J.O.	I.M.

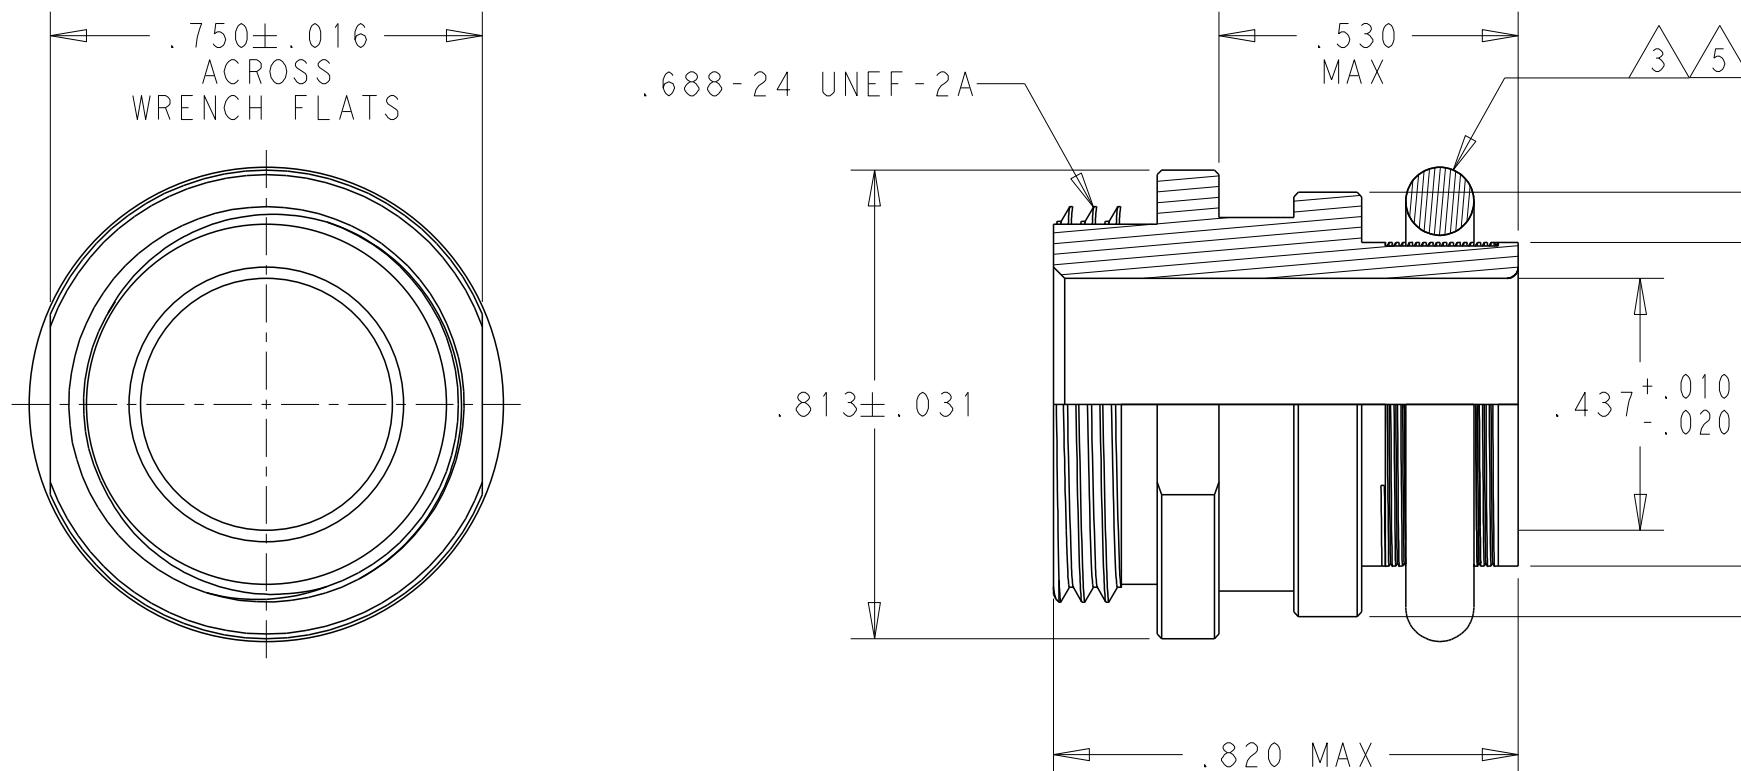

ORDERING INFORMATION

PRODUCT DESIGNATOR

MATERIAL -
ALUMINUM ALLOY PER QQ-A-225

FINISH (SEE S-CH00-0157-002)

Straight Adapter —

ENTRY SIZE _____
BRAID A: SINGLE LAYER 36 AWG _____
BRAID B: SINGLE LAYER 30 AWG OR DOUBLE
LAYER 36 AWG

RING WITH INSULATING LINING—

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. THIS PRODUCT IS DESIGNED TO TERMINATE TO A BRAIDED CABLE SHIELD AND A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR

SEE DRAWING 925076 FOR DETAIL ON THE TINEL-LOCK RING.
RINGS DESIGNED TO BE HEATED ELECTRICALLY OR WITH A HOT AIR GUN.
ALL RINGS ARE MARKED WITH THERMOCHROMIC PAINT WHICH
CHANGES COLOR WHEN INSTALLATION TEMPERATURE IS REACHED.

4. IDENTIFICATION TO BE IN ACCORDANCE WITH MIL-STD-130.
MARKING TO INCLUDE CODE IDENT. NO. AND ASSEMBLY P/N
LESS RING DESIGNATOR (E.G. 06090 TXS01AC00-07)

5 RINGS SHALL BEAR NO MARKING

6 ADAPTER MATES TO: GC-329 CONNECTORS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. OGGIER 06APR2016	 TE Connectivity
DIMENSIONS: INCHES		CHK I. MYONG 07APR2016	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD I. MYONG 08APR2016	
		PRODUCT SPEC -	
0 PLC \pm -. 1 PLC \pm .1 2 PLC \pm .01 3 PLC \pm .001 4 PLC \pm .0001 ANGLES \pm -		APPLICATION SPEC CH00-0157-003	
MATERIAL SEE S-CH00-0157-002		FINISH SEE S-CH00-0157-002	
WEIGHT -		SIZE A3 CAGE CODE 06090 DRAWING NO C-TXS01	RESTRICTED T -
CUSTOMER DRAWING			
SCALE 3:1		SHEET 1 OF 1	REV D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[TXS01AB00-07-CS2265](#)