



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AA	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C1		REVISED PER ECO-11-004835	11MAR11	RK	HMR

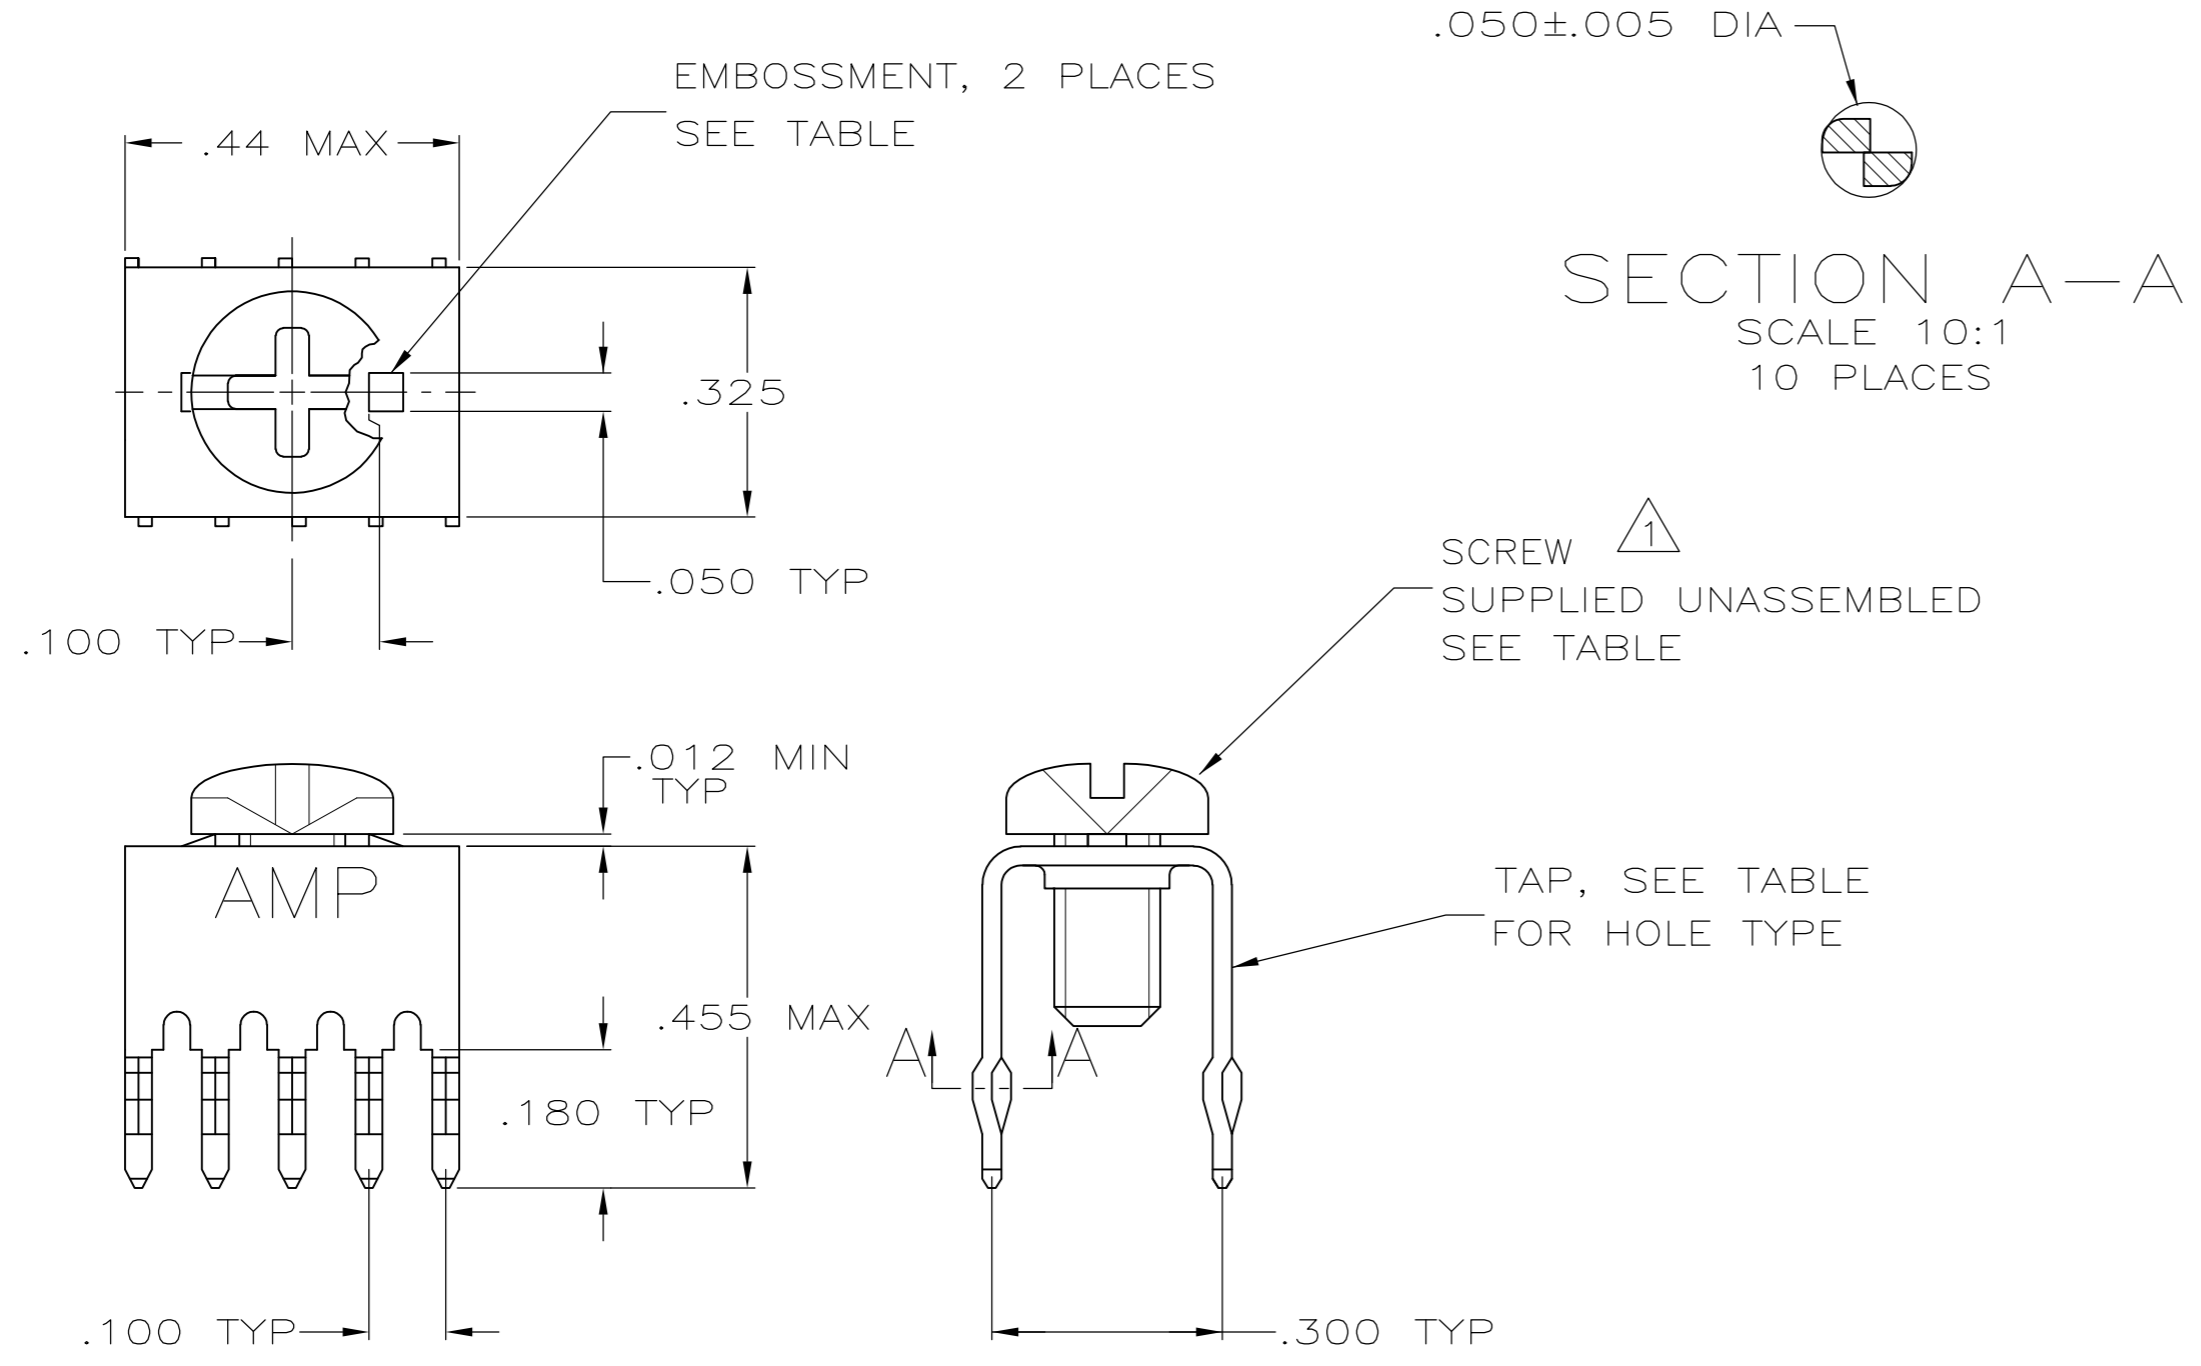

- ¹ TO PREVENT THREAD STRIPPING, SCREW TORQUE SHOULD NOT EXCEED 9 IN LBS.
- ² TAP HOLE IS 6-32UNC-2B, TWO MIN THREADS.
- ³ TAP HOLE IS M4 X 0.7, TWO MIN THREADS.
- ⁴ TAP: .000020-.000120 MATTE TIN OVER .000050 NICKEL.
- ⁵ REFERENCE APPLICATION SPECIFICATION 114-11000 FOR DRILL HOLE SIZES AND FINISHES.

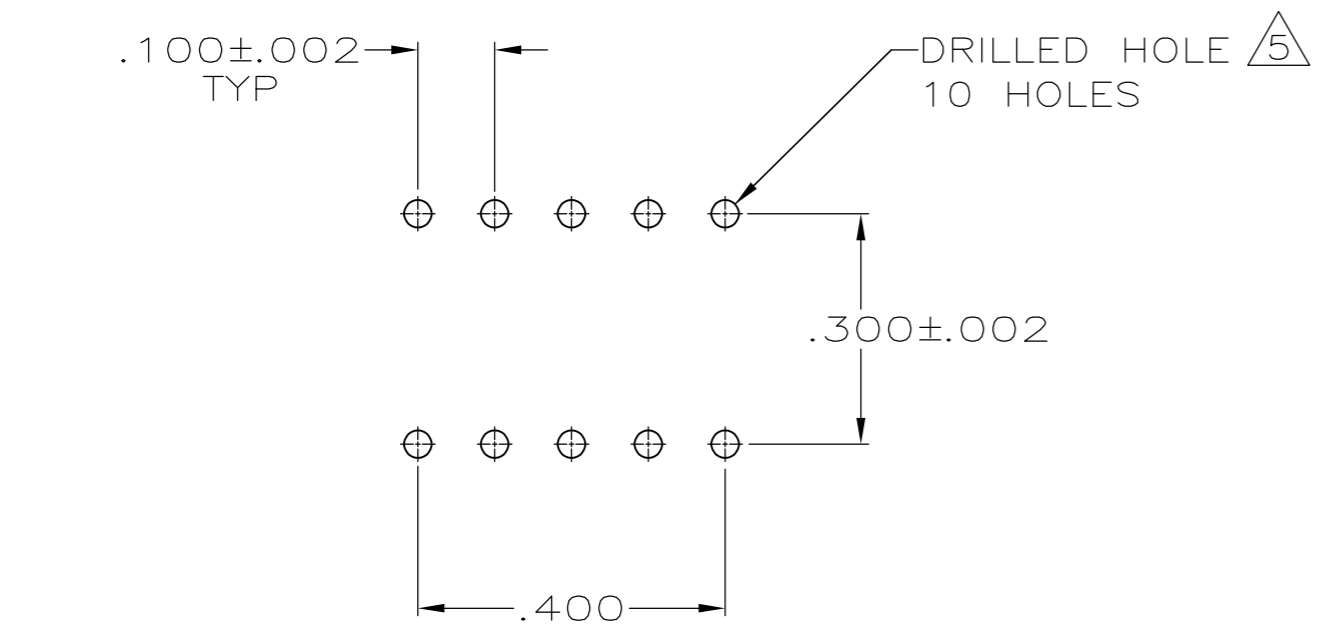

PC BOARD PATTERN

FINISH	HOLE TYPE	SCREW	EMBOSSMENT	PART NUMBER
⁴	³	NO	YES	1-5055558-1
⁴	²	NO	NO	5055558-7
	²	993879-1	YES	5055558-4
	²	NO	YES	5055558-3

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	J. ALCORTA - DOCK5	05-04-05	STE TE Connectivity	
CHK	A. FRANTUM	05-04-05		
APVD	S. FLICKINGER	05-04-05	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:			PRODUCT SPEC	
0 PLC ± -			108-11030	
1 PLC ± -			APPLICATION SPEC	
2 PLC ± -			114-11000	
3 PLC ± .008			SIZE	
4 PLC ± -			A2	
ANGLES ± -			CAGE CODE	
FINISH ⁴			00779	
MATERIAL			DRAWING NO	
COPPER ALLOY 725.			C=5055558	
WEIGHT			RESTRICTED TO	
-			-	
CUSTOMER DRAWING			SCALE	
			4:1	
			SHEET	
			1 of 1	
			REV	
			C1	

5055558

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5055558-7](#)