

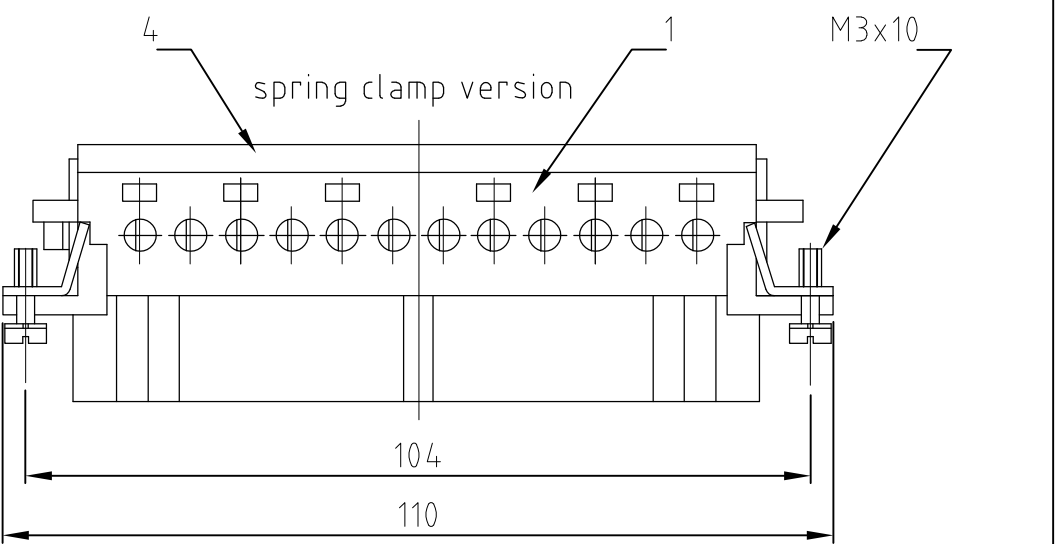


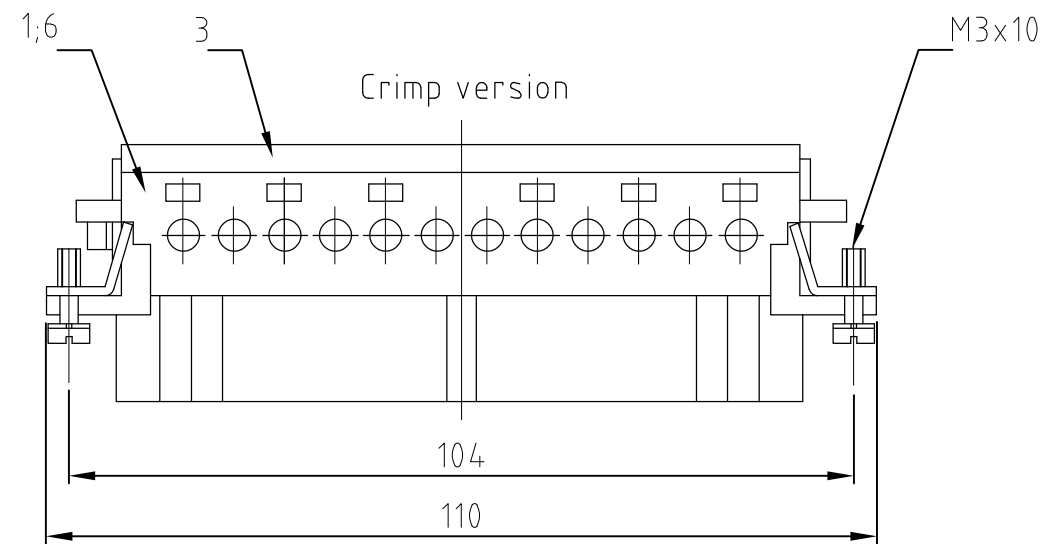


Contact arrangement view from termination side


Printing 1-24

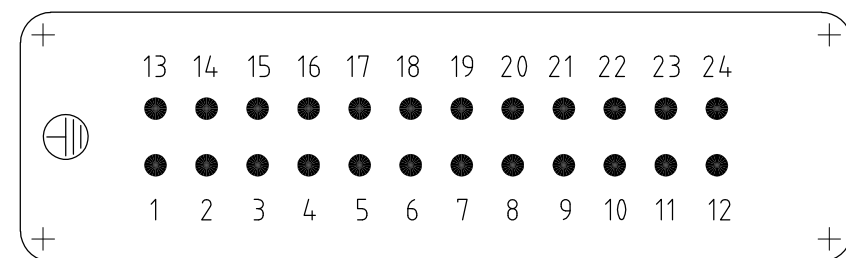


Printing 25-48

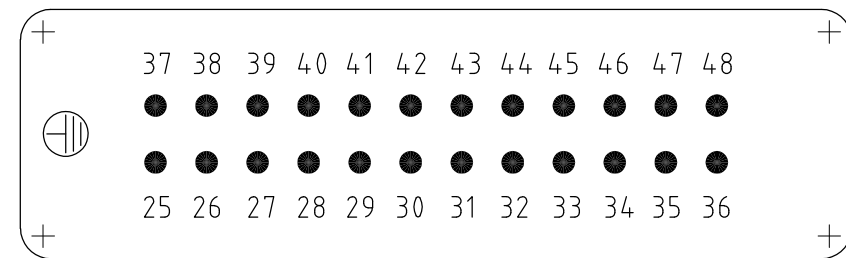

Panel cut-out for contact insert when used without housing

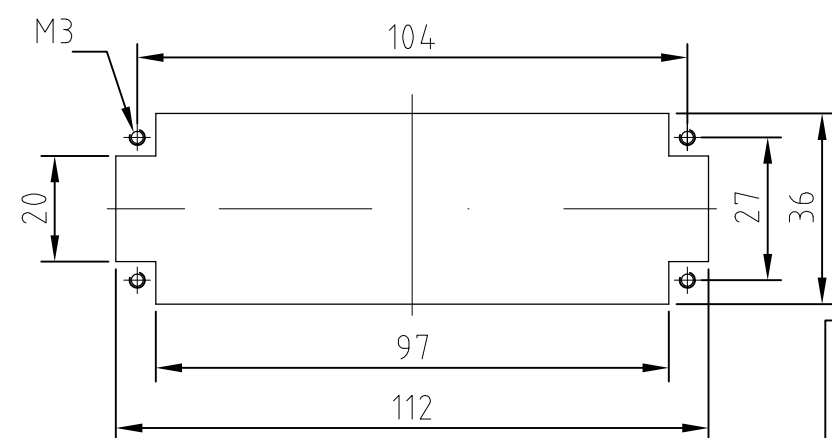

HE 24-Bu-S, B1-24 KM	△	0-10	1	1						OBSELETE
HE 24-Bu-C-3,3 B1-24	△	0-10	1	1					1	OBSELETE
HE 24-Bu-SC-AUB1-24	△	29-31	1	1					1	OBSELETE
HE 24-Bu-S-T B 12+6+6	△	31-89	1	1					1	OBSELETE
HE 24-Bu-S-AUB25-48	△	89-49	1	1					1	OBSELETE
HE 24-Bu-S-AUB1-24	△	49-57	1	1					1	
HE 24-Bu-SC B25-48	△	57-97	1	1					1	
HE 24-Bu-SC B1-24	△	97-12	1	1					1	
HE 24-Bu-C B25-48	△	12-92	1	1					1	
HE 24-Bu-C B1-24	△	92-31	1	1					1	
HE 24-Bu-S B25-48	△	31-91	1	1					1	
HE 24-Bu-S-T	△	91-7	1	1					1	OBSELETE

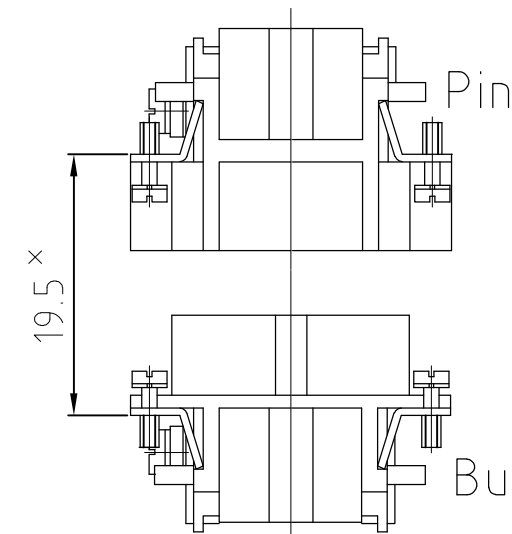

× distance for a safe
contact max: max: 21 mm

NOTES:

- 1 SUITABLE CRIMP CONTACTS: SERIES HE/HAA
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM
- 2 SUITABLE HOOD SIZE 8; 12: SERIES HB; HD; HIP; EMV
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264
- 3 Strip lenght: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm
- 4 STANDARDS:
DIN EN 61984; DIN EN 60664-1

- 5 PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED

- 6 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 220 PIECES

[illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-1103641-1](#)