

C 220, Platinum Resistance Temperature Detector according to DIN EN 60751 Temperature range -196 °C to +150 °C

The C series thin-film PRTDs combine the ideal curve characteristics of ceramic wire-wound RTDs with the vibration resistance of glass wire-wound RTDs and represent an excellent alternative to wire-wound RTDs. They are characterized by high long-term stability, excellent temperature shock resistance and a wide temperature range of -196 °C to +150 °C, they show no hysteresis. These features make them best suited for applications in aerospace, chemical and power generation plants and analytical equipment.

| Nominal Resistance R ₀ | Tolerance | Order Number |
|-----------------------------------|-------------------------|-----------------|
| | DIN EN 60751 2009-05 | VCI-plastic bag |
| 100 Ohm at 0 °C | F 0.3 (Class B) | 32 207 399 |

The measuring point for the nominal resistance is defined at 8 mm from the end of the sensor body.

Temperature and tolerance range

-196 °C to +150 °C

Tolerance class F 0.3 (B): -196 °C to +150 °C

Temperature coefficient

TCR = 3850 ppm/K

Response time

Water current (v= 0.4m/s): t_{0.5} = 0.06 s

t_{0.9} = 0.20 s

Air stream (v= 2m/s): t_{0.5} = 3.0 s

t_{0.9} = 13.0 s

Measuring current

100 Ω: 0.3 to 1.0 mA

(self-heating has to be considered)

Long-term stability

R₀-Drift 0.03 % after 1000 hours at 150 °C

Self-heating


0.4 K/mW at 0 °C

Insulation resistance

> 100 MΩ at 150 °C

Vibration resistance

At least 40 g acceleration at 10 to 2000 Hz, depends on installation

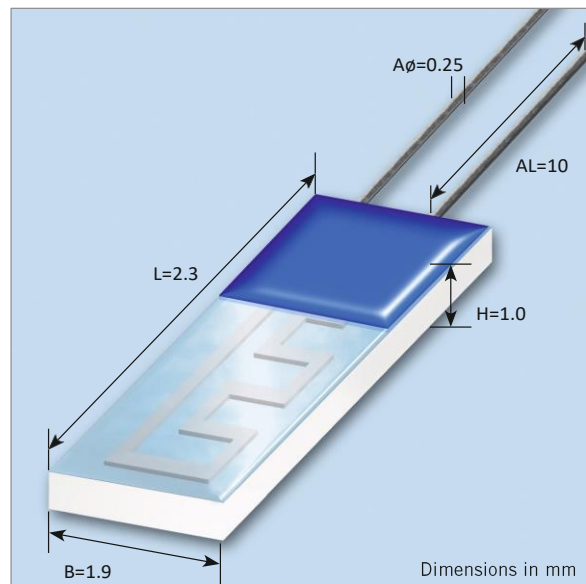


The information provided in this data sheet regarding the technical characteristics of the product describe the quality of the product, but shall not be qualified or construed as quality guarantees (Beschaffenheitsgarantie) in the meaning of sections 443 and 444 German Civil Code.

The information provided in this data sheet regarding measurement values (response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product; measurements in productive use may vary significantly depending on the specific conditions of use.

The customer is solely responsible to check whether the product is suited for the intended use; in this respect Heraeus cannot assume any liability. The sale of any products of Heraeus is exclusively subject to the General Terms of Sale and Delivery of Heraeus in their current version, which is available under www.heraeus.com/gtc. This data sheet is subject to changes without prior notice.

Heraeus Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany
Web: www.heraeus-nexensos.com



C 220, Platinum Resistance Temperature Detector according to DIN EN 60751 Temperature range -196 °C to +150 °C

Shock resistance

At least 100 g acceleration with 8 ms half sine wave, depends on installation

Leads

AgPd-wire

Lead lengths (L)

10 mm \pm 1 mm

Connection technology

Suitable for soft soldering
(note application temperature of the solder)

Tensile Strength of leads

\geq 8 N

Packaging


VCI plastic bag

Storage life

Min. 12 month (in original packaging)

Note

Other tolerances, values of resistance and wire lengths are available on request.



The information provided in this data sheet regarding the technical characteristics of the product describe the quality of the product, but shall not be qualified or construed as quality guarantees (Beschaffenheitsgarantie) in the meaning of sections 443 and 444 German Civil Code.

The information provided in this data sheet regarding measurement values (response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product; measurements in productive use may vary significantly depending on the specific conditions of use.

The customer is solely responsible to check whether the product is suited for the intended use; in this respect Heraeus cannot assume any liability. The sale of any products of Heraeus is exclusively subject to the General Terms of Sale and Delivery of Heraeus in their current version, which is available under www.heraeus.com/gtc. This data sheet is subject to changes without prior notice.

Heraeus Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany
Web: www.heraeus-nexensos.com