


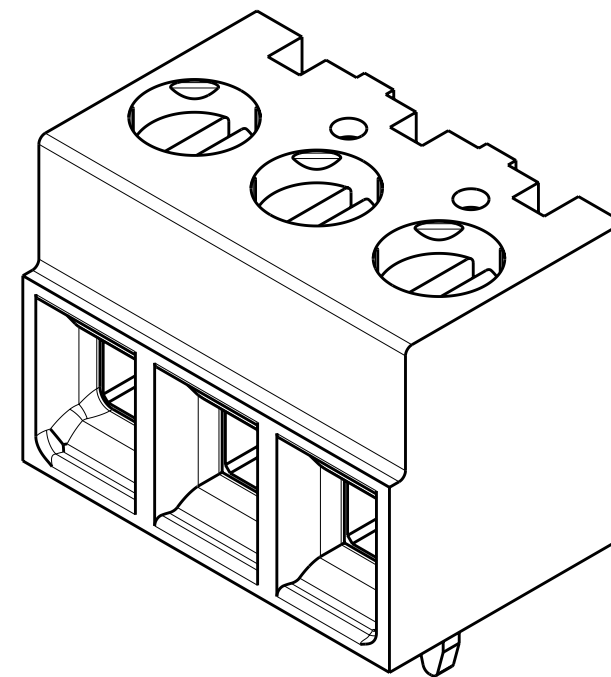


△ MATERIALS AND FINISH:
HOUSING: HIGH TEMPERATURE POLYAMIDE, UL 94V-0 RATED,
COLOR: BLACK.
TERMINAL: COPPER ALLOY, TIN PLATED.
CLAMP: COPPER ALLOY, NICKEL PLATED.
CLAMPING SCREW: COPPER ALLOY, NICKEL PLATED.

2. WIRE SIZE RANGE: 16-28 AWG.

3. CURRENT RATING: 12A, 150V
OPERATING TEMPERATURE: -40°C TO +110°C

4. SUITABLE FOR 2.4mm MAX PC BOARD THICKNESS.

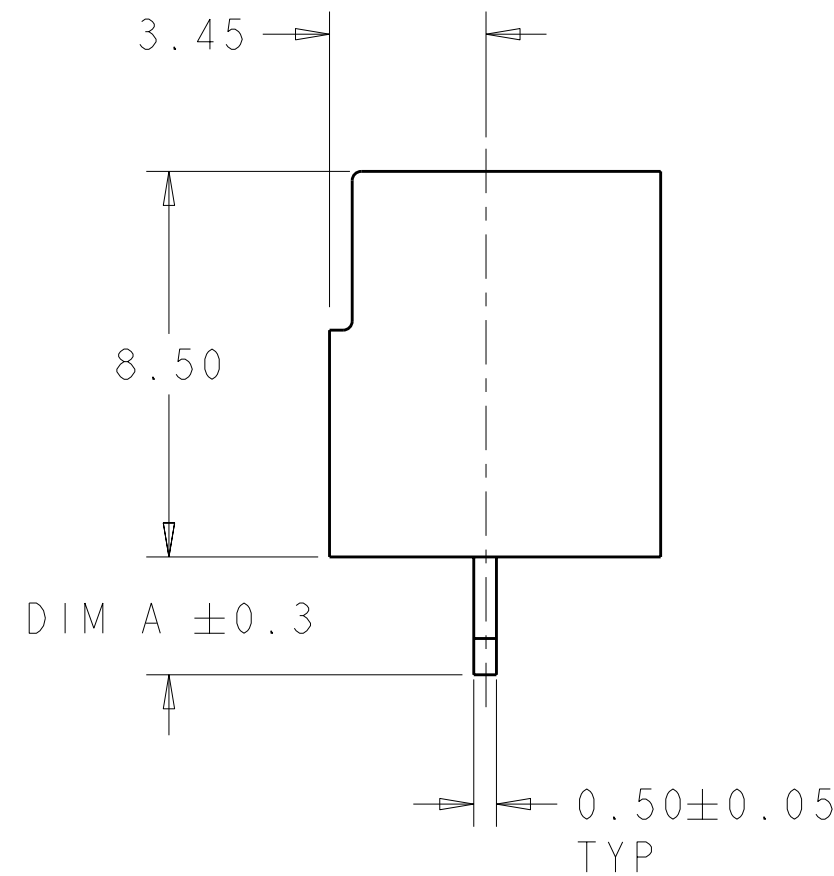3.52.6D I M

DIMENSIONS:

TOLERANCES UNLESS

C. RICHARD
02 JUN 2005

PRODUCT SPECAPPLICATION SPEC[illegible][illegible][illegible]

NAME	TERMINAL	BLOCK	PCB	MOUNT
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				
42				
43				
44				
45				
46				
47				
48				
49				
50				
51				
52				
53				
54				
55				
56				
57				
58				
59				
60				
61				
62				
63				
64				
65				
66				
67				
68				
69				
70				
71				
72				
73				
74				
75				
76				
77				
78				
79				
80				
81				
82				
83				
84				
85				
86				
87				
88				
89				
90				
91				
92				
93				
94				
95				
96				
97				
98				
99				
100				

TERMINAL BLOCK, FCB MOUNT, STRAIGHT 0.5 PROFILE

STRAIGHT, 8.5mm PROFILE,SIDE WIRE ENTRY 3.81mm PITCH

CYCLE THREE ENTRY, CYCLE FOUR FIVE			
DATE	CLASSROOM	CLASSROOM	CLASSROOM

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
------	-----------	------------	---------------

Λ 200770 C-1776113

AZ00779	G=1776113	-
---------	-----------	---

SCALE	SHEET	OF	REV
-------	-------	----	-----

RECOMMENDED PC BOARD LAYOUT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1776113-1](#)