

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

© COPYRIGHT - By

ALL RIGHTS RESERVED

LOC

	DIST
--	------

AD

00

[illegible]

P	LIR
---	-----

REVISIONS

DESCRIPTION

DATE _____

DMN	AE
-----	----

מחיר






	2015
	2016

DESCRIPTION

DATE
11/11/11

500	75
514	114

15	
16	

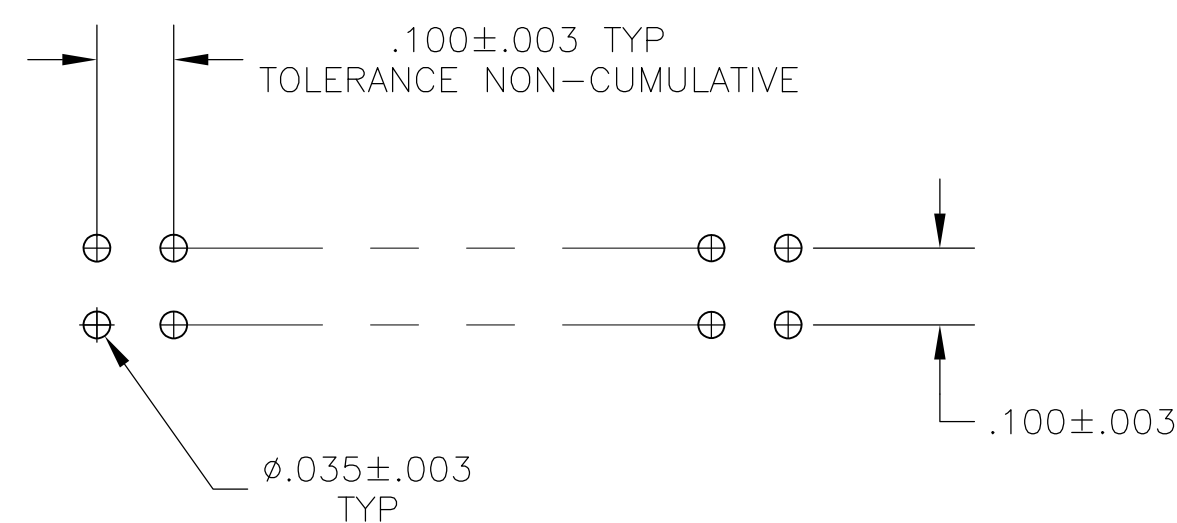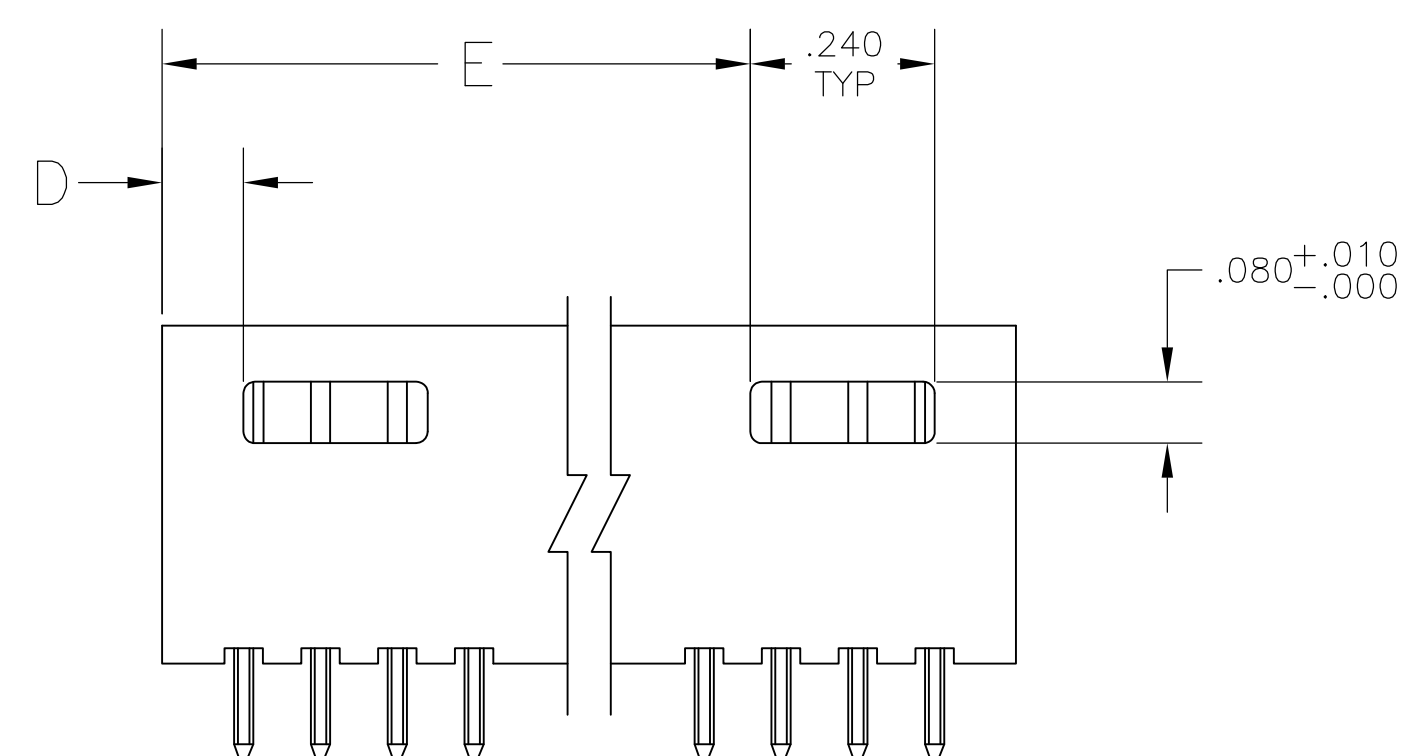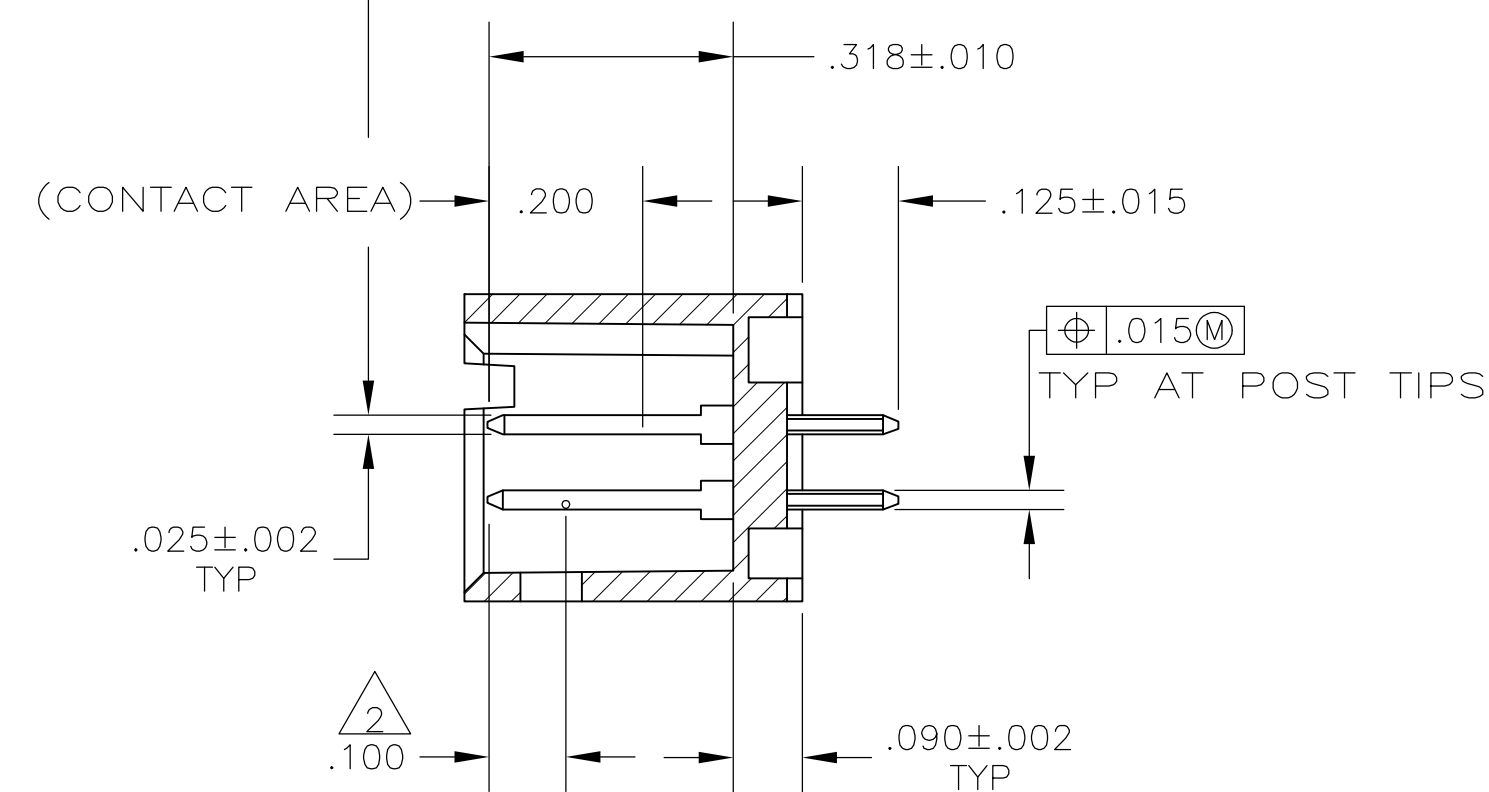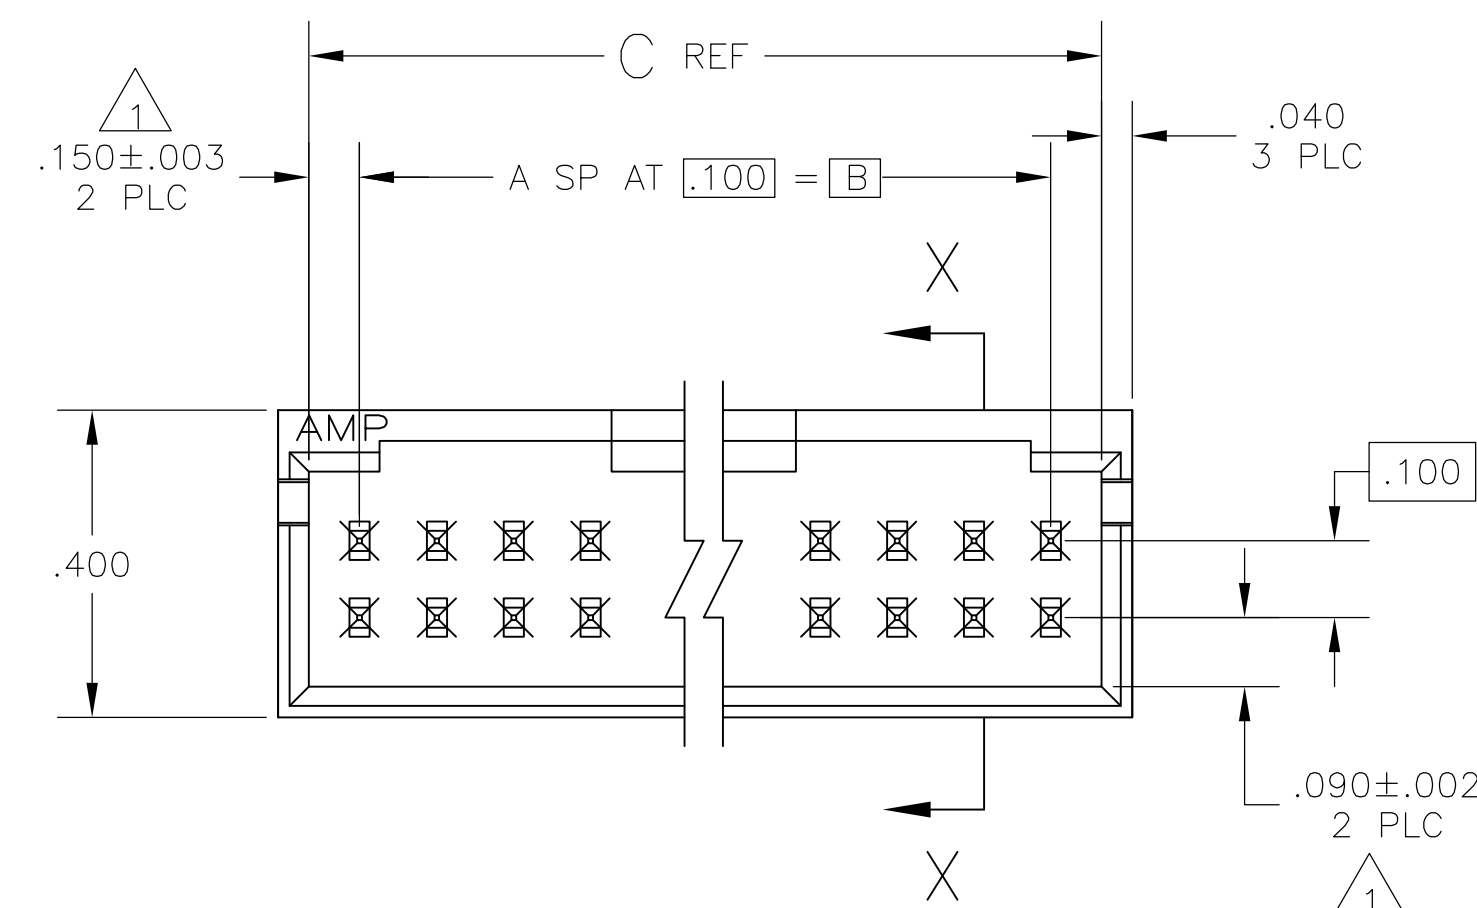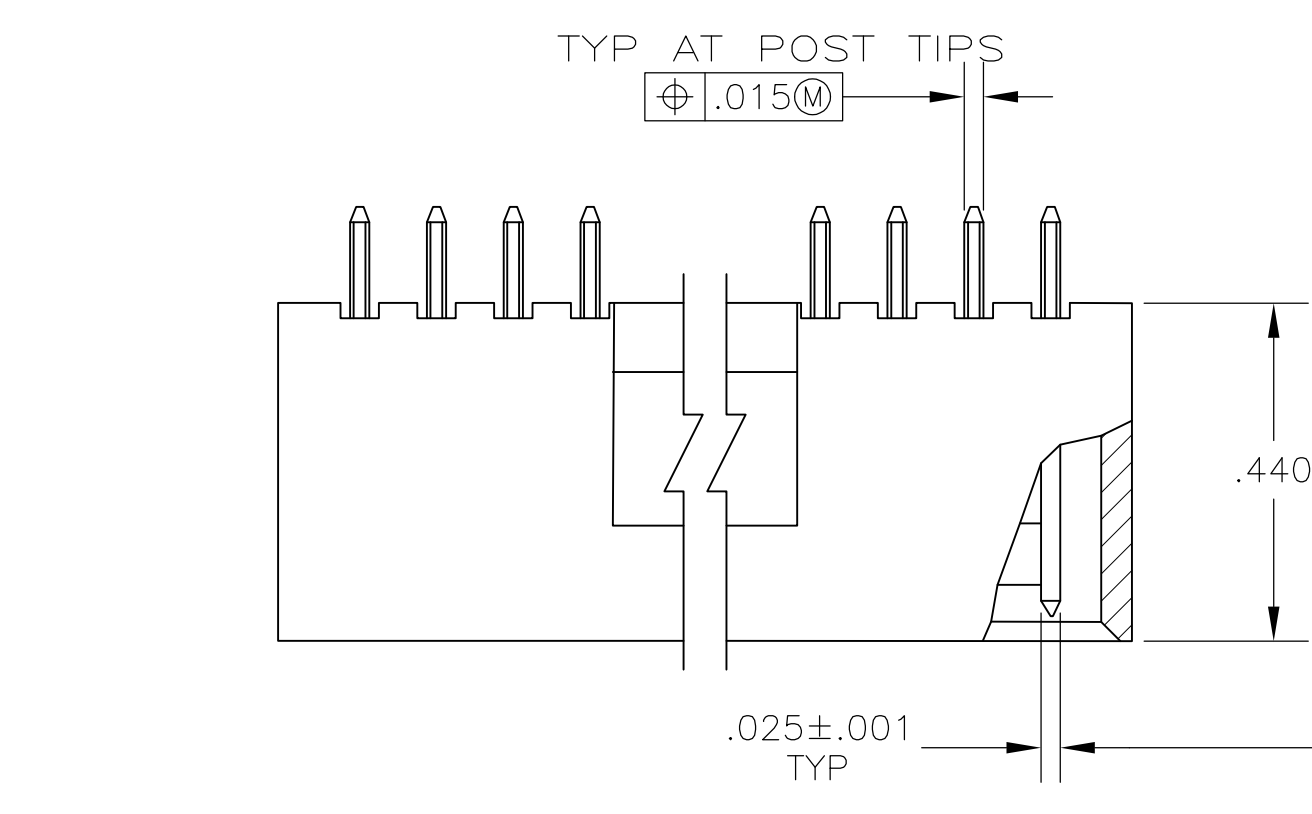

RECOMMENDED HOLE LAYOUT

1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION
OF THE POST AND HOUSING

 POINT OF MEASUREMENT FOR PLATING THICKNESS


△₃ INDICATED PARTS ARE PACKED IN
"GANG-OF -TUBES"

4 POSTS; .000030 GOLD IN CONTACT AREA, .000100-.000200
MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL.

5 POSTS; .000030 GOLD IN CONTACT AREA, .000100—.000200
MATTE TIN ON SOLDER TAIL, ALL OVER .000050 NICKEL.

6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

3	5	1.090	.190	1.400	1.100	1 1	24	6	8-103169-5	3	OBSOLETE	4	1.090	.190	1.400	1.100	1 1	24	3-103169-5
	5	3.490	.190	3.800	3.500	35	72	6	8-103169-4		4	3.490	.190	3.800	3.500	35	72	6	3-103169-4
	5	3.390	.190	3.700	3.400	34	70	6	8-103169-3		4	3.390	.190	3.700	3.400	34	70	6	3-103169-3
	5	3.290	.190	3.600	3.300	33	68	6	8-103169-2		4	3.290	.190	3.600	3.300	33	68	6	3-103169-2
	5	3.190	.190	3.500	3.200	32	66	6	8-103169-1		4	3.190	.190	3.500	3.200	32	66	6	3-103169-1
	5	3.090	.190	3.400	3.100	31	64	6	8-103169-0		4	3.090	.190	3.400	3.100	31	64	6	3-103169-0
	5	2.990	.190	3.300	3.000	30	62	6	7-103169-9		4	2.990	.190	3.300	3.000	30	62	6	2-103169-9
	5	2.890	.190	3.200	2.900	29	60	6	7-103169-8		4	2.890	.190	3.200	2.900	29	60	6	2-103169-8
	5	2.790	.190	3.100	2.800	28	58	6	7-103169-7		4	2.790	.190	3.100	2.800	28	58	6	2-103169-7
	5	2.690	.190	3.000	2.700	27	56	6	7-103169-6		4	2.690	.190	3.000	2.700	27	56	6	2-103169-6
	5	2.590	.190	2.900	2.600	26	54	6	7-103169-5		4	2.590	.190	2.900	2.600	26	54	6	2-103169-5
	5	2.490	.190	2.800	2.500	25	52	6	7-103169-4		4	2.490	.190	2.800	2.500	25	52	6	2-103169-4
	5	2.390	.190	2.700	2.400	24	50	6	7-103169-3		4	2.390	.190	2.700	2.400	24	50	6	2-103169-3
	5	2.290	.190	2.600	2.300	23	48	6	7-103169-2		4	2.290	.190	2.600	2.300	23	48	6	2-103169-2
	5	2.190	.190	2.500	2.200	22	46	6	7-103169-1		4	2.190	.190	2.500	2.200	22	46	6	2-103169-1
	5	2.090	.190	2.400	2.100	21	44	6	7-103169-0		4	2.090	.190	2.400	2.100	21	44	6	2-103169-0
	5	1.990	.190	2.300	2.000	20	42	6	6-103169-9		4	1.990	.190	2.300	2.000	20	42	6	1-103169-9
	5	1.890	.190	2.200	1.900	19	40	6	6-103169-8		4	1.890	.190	2.200	1.900	19	40	6	1-103169-8
	5	1.790	.190	2.100	1.800	18	38	6	6-103169-7		4	1.790	.190	2.100	1.800	18	38	6	1-103169-7
	5	1.690	.190	2.000	1.700	17	36	6	6-103169-6		4	1.690	.190	2.000	1.700	17	36	6	1-103169-6
5	1.590	.190	1.900	1.600	16	34	6	6-103169-5	4	1.590	.190	1.900	1.600	16	34	6	1-103169-5		
5	1.490	.190	1.800	1.500	15	32	6	6-103169-4	4	1.490	.190	1.800	1.500	15	32	6	1-103169-4		
5	1.390	.190	1.700	1.400	14	30	6	6-103169-3	4	1.390	.190	1.700	1.400	14	30	6	1-103169-3		
5	1.290	.190	1.600	1.300	13	28	6	6-103169-2	4	1.290	.190	1.600	1.300	13	28	6	1-103169-2		
5	1.190	.190	1.500	1.200	12	26	6	6-103169-1	4	1.190	.190	1.500	1.200	12	26	6	1-103169-1		
5	1.090	.190	1.400	1.100	1 1	24	6	6-103169-0	4	1.090	.190	1.400	1.100	1 1	24	6	1-103169-0		
5	.990	.190	1.300	1.000	10	22	6	5-103169-9	4	.990	.190	1.300	1.000	10	22	6	103169-9		
5	.890	.190	1.200	.900	9	20	5	5-103169-8	4	.890	.190	1.200	.900	9	20	103169-8			
5	—	.490	1.100	.800	8	18	5	5-103169-7	4	—	.490	1.100	.800	8	18	103169-7			
5	—	.390	1.000	.700	7	16	5	5-103169-6	4	—	.390	1.000	.700	7	16	103169-6			
5	—	.390	.900	.600	6	14	5	5-103169-5	4	—	.390	.900	.600	6	14	103169-5			
5	—	.290	.800	.500	5	12	5	5-103169-4	4	—	.290	.800	.500	5	12	103169-4			
5	—	.290	.700	.400	4	10	5	5-103169-3	4	—	.290	.700	.400	4	10	103169-3			
5	—	.190	.600	.300	3	8	5	5-103169-2	4	—	.190	.600	.300	3	8	103169-2			
5	—	.190	.500	.200	2	6	5	5-103169-1	4	—	.190	.500	.200	2	6	103169-1			
PLATING	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER		PLATING	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 04 SEP 87		 TE Connectivity	
		CHK. 04 SEP 87			
DIMENSIONS:		MAYER		NAME	
INCHES		R. FEIDT 09 SEP 87			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		HDR ASSY, MOD II, SHROUDED, 4 SIDES, DBL ROW, VERTICAL, .100X.100 C/L, WITH .025 SQ POSTS	
		0 PLC ± .			
		1 PLC ± .			
		2 PLC ± .005			
4 PLC ± .		PRODUCT SPEC		APPLICATION SPEC	
4 PLC ± .		—			
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR-BLACK PORTS: PHOS. BRNZE		FINISH		RESTRICTED TO	
SEE TABLE		WEIGHT		A1 00779 C=103169	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV 1/2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-103169-2](#)