
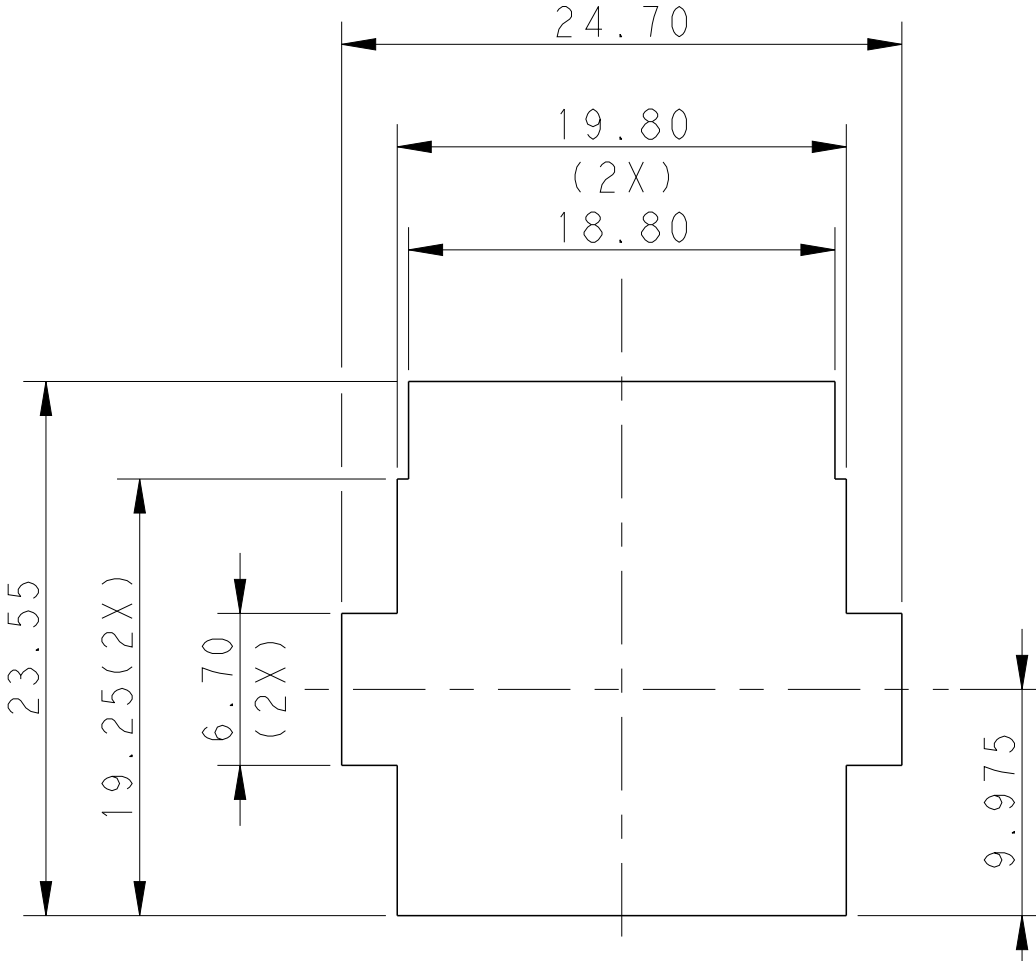
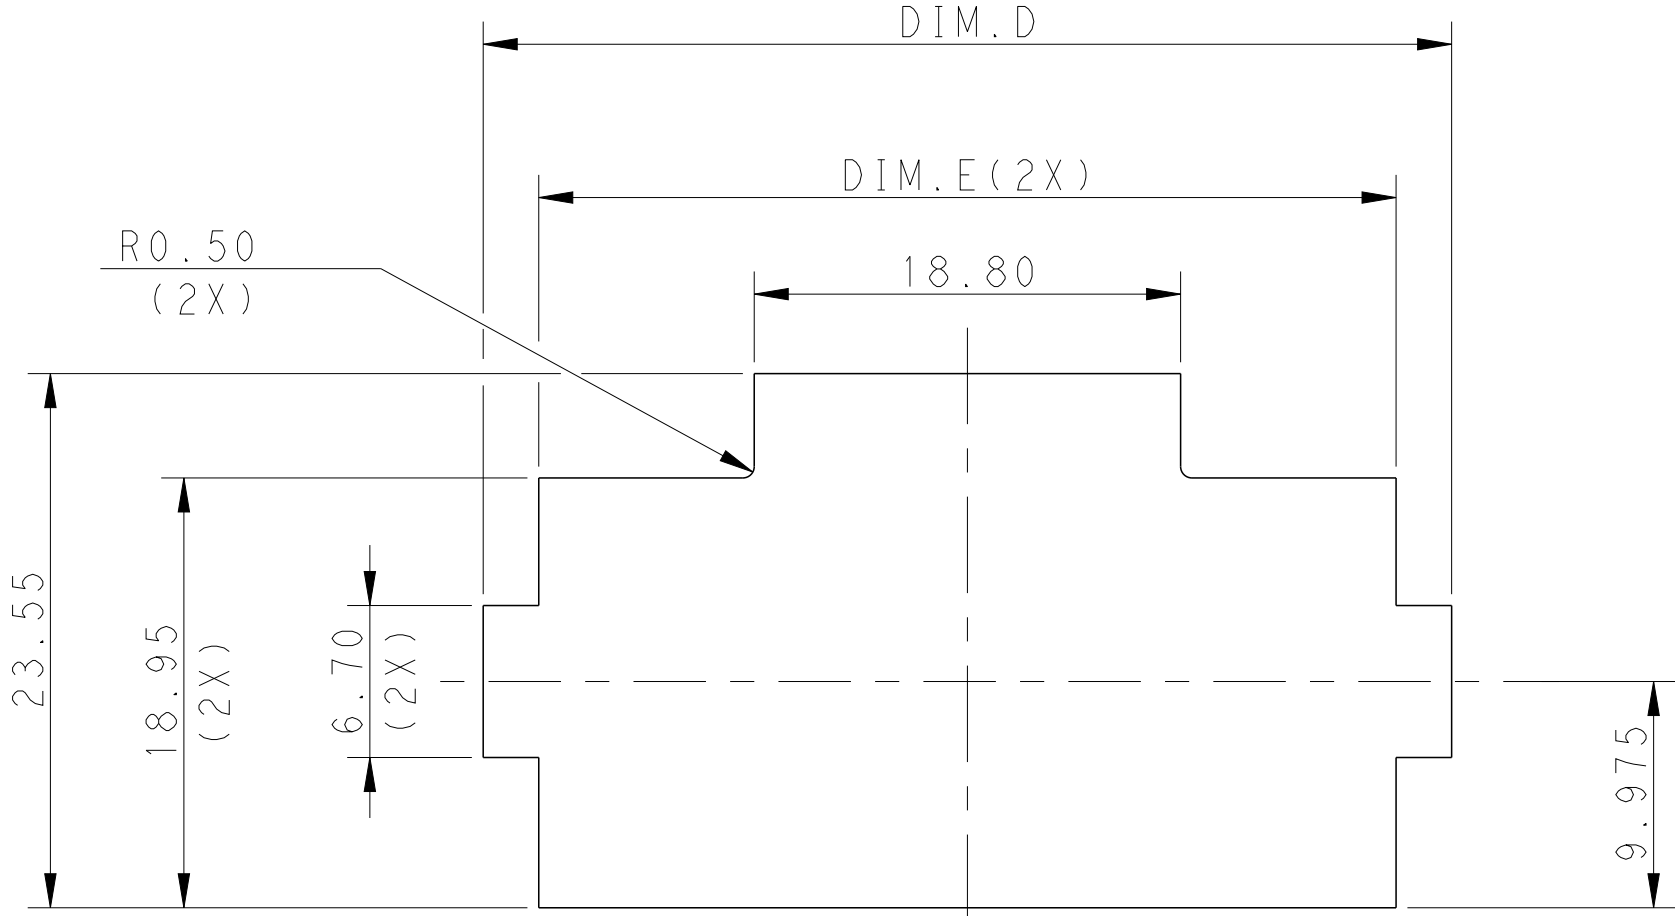






REVISIONS					
LOC	DIST	P	LTR	DESCRIPTION	DATE
-	-		C	REVISED PER ECR-16-003314	15JUL2016

DWN	APVD
BW	GJ

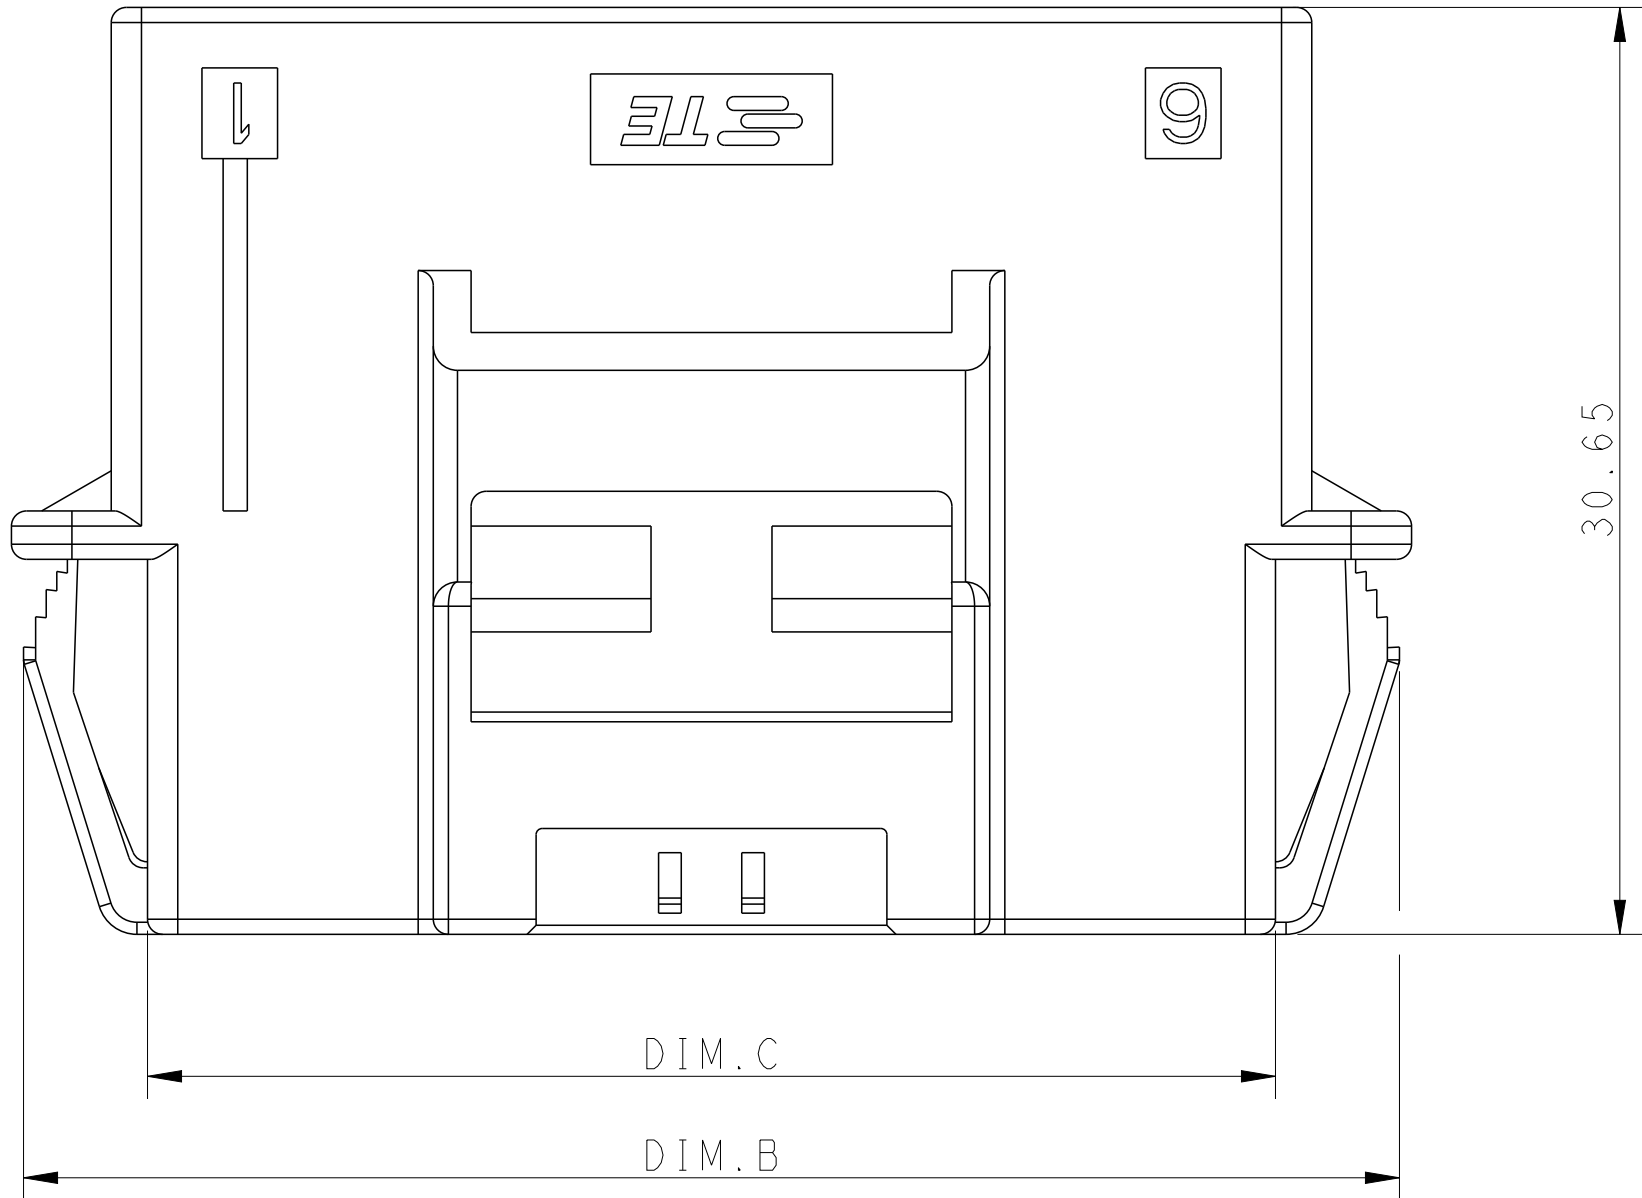

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 2*6 AND 2*5 AND 2*4 POSITIONS
(TOLERANCE: ±0.15mm)

RECOMMENDED PANEL OPENING DEMENSIONS
FOR CAP HOUSING 2*3 POSITION
(TOLERANCE: ±0.15mm)

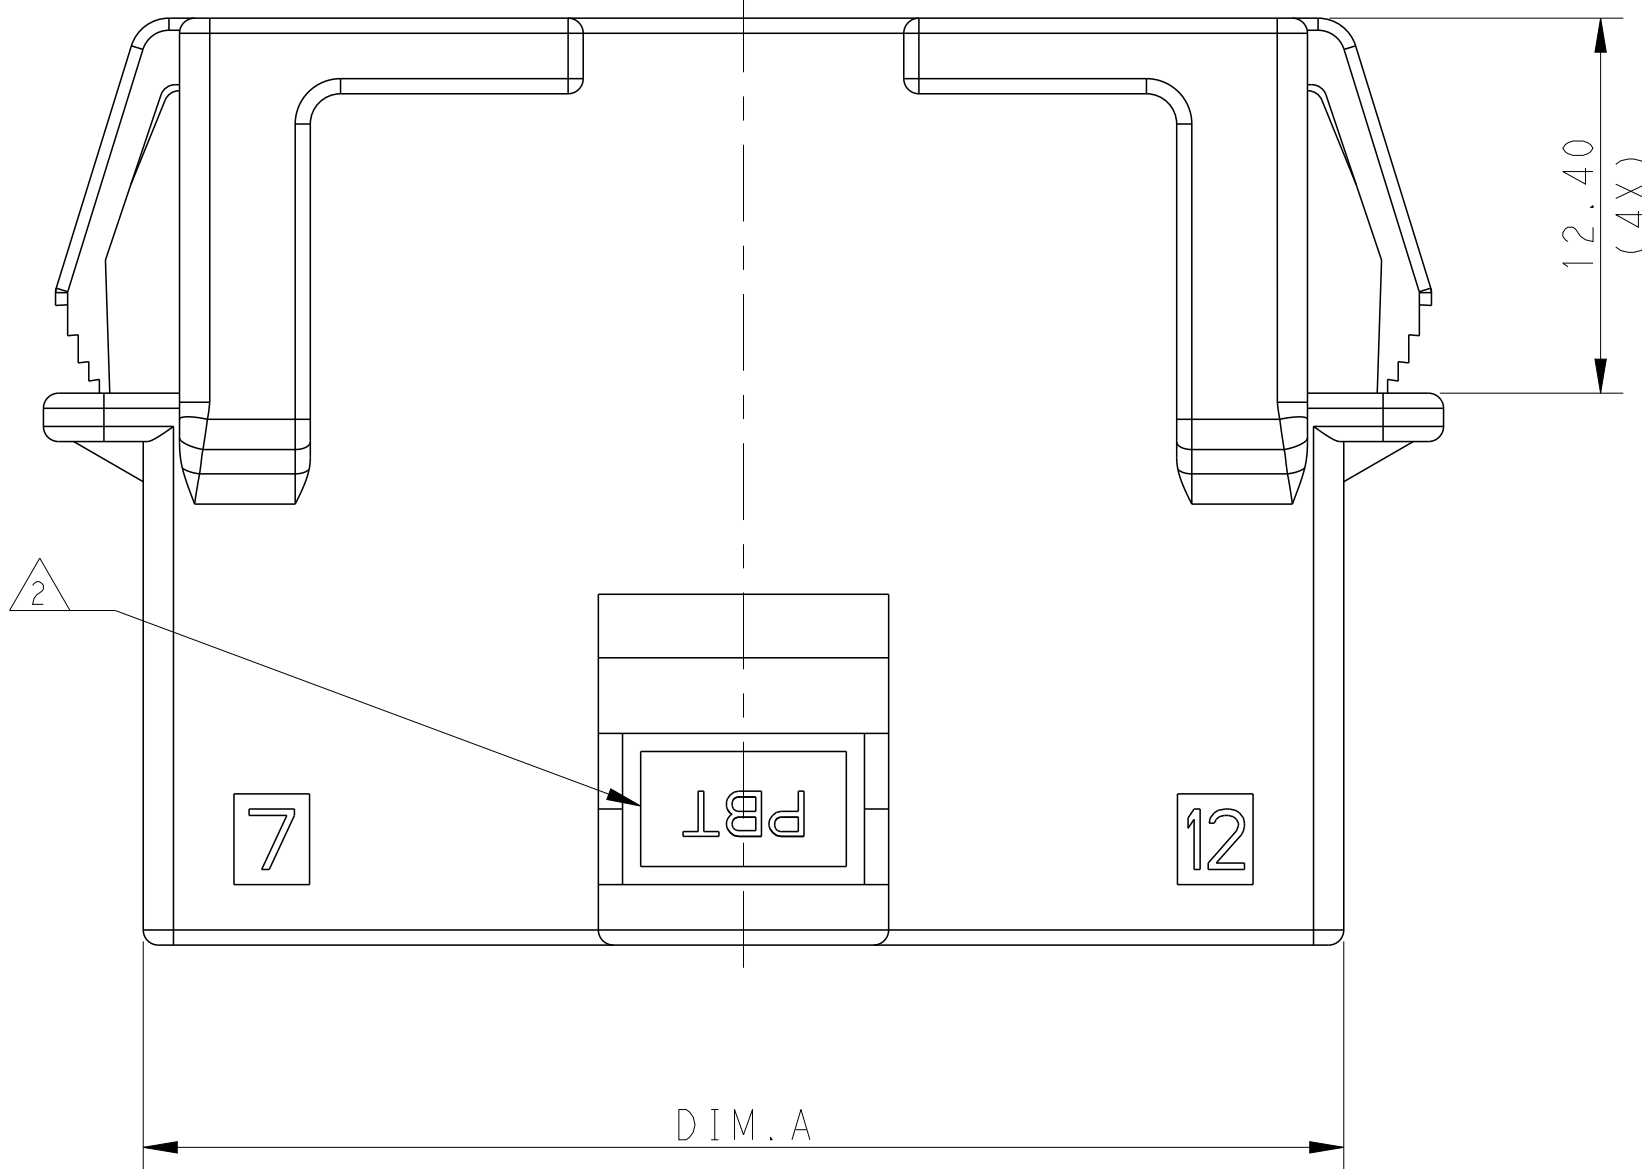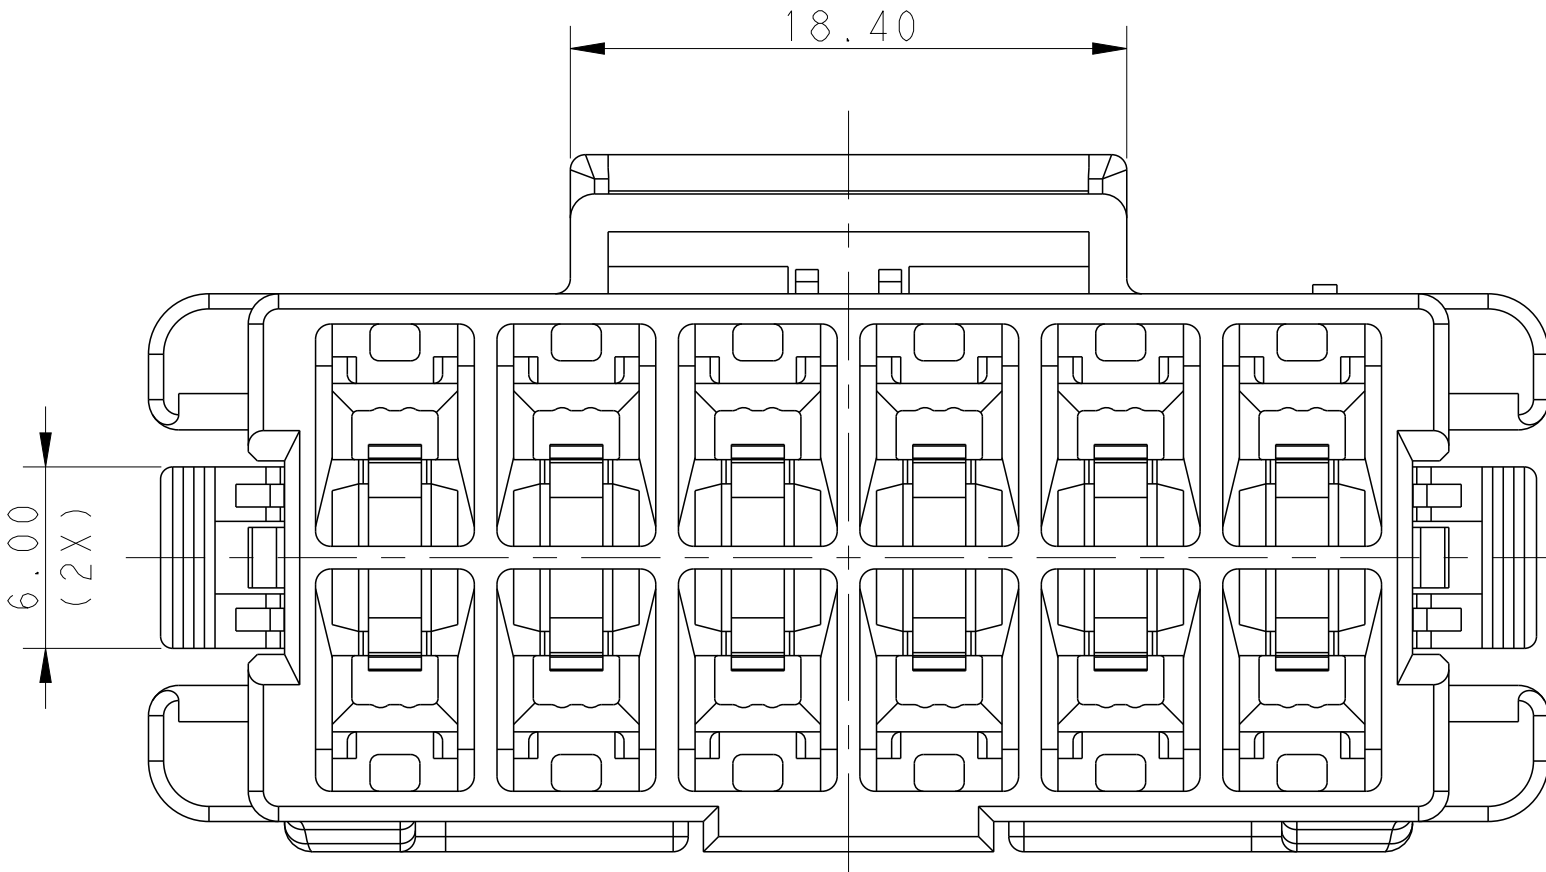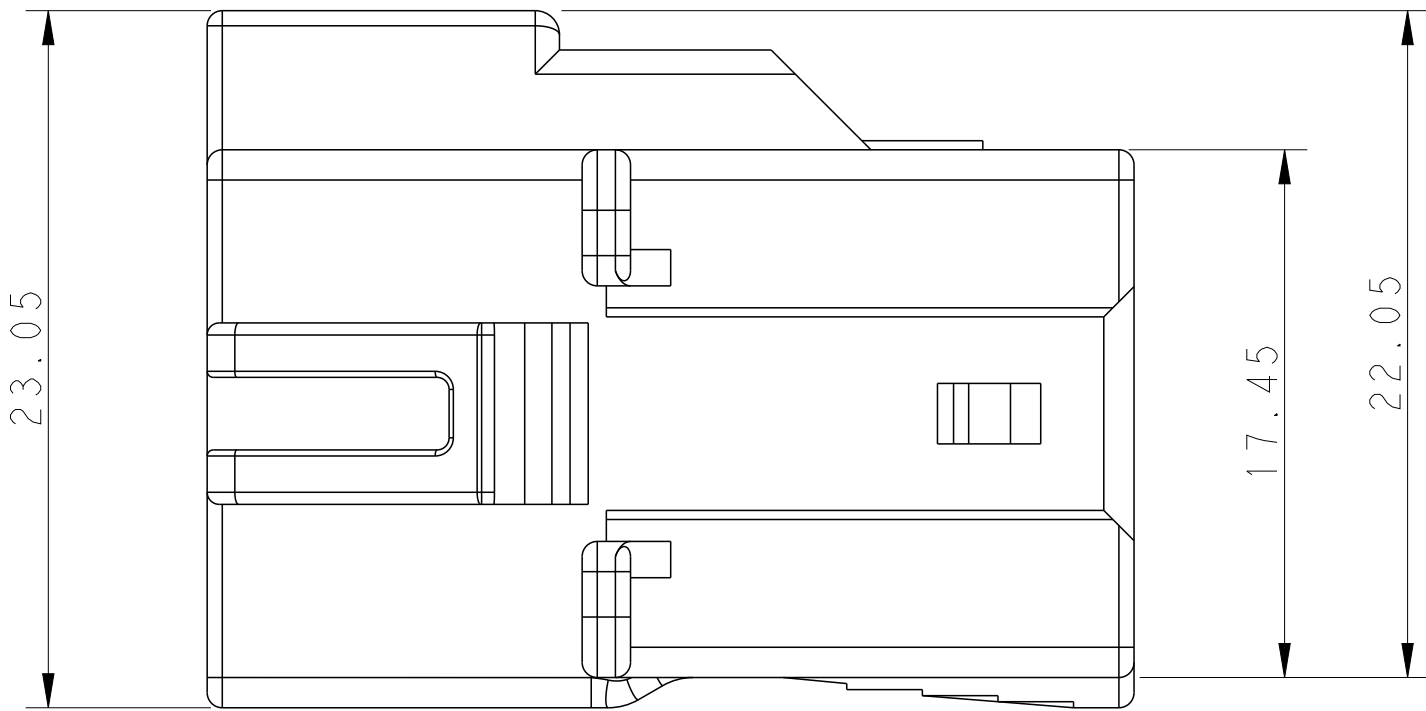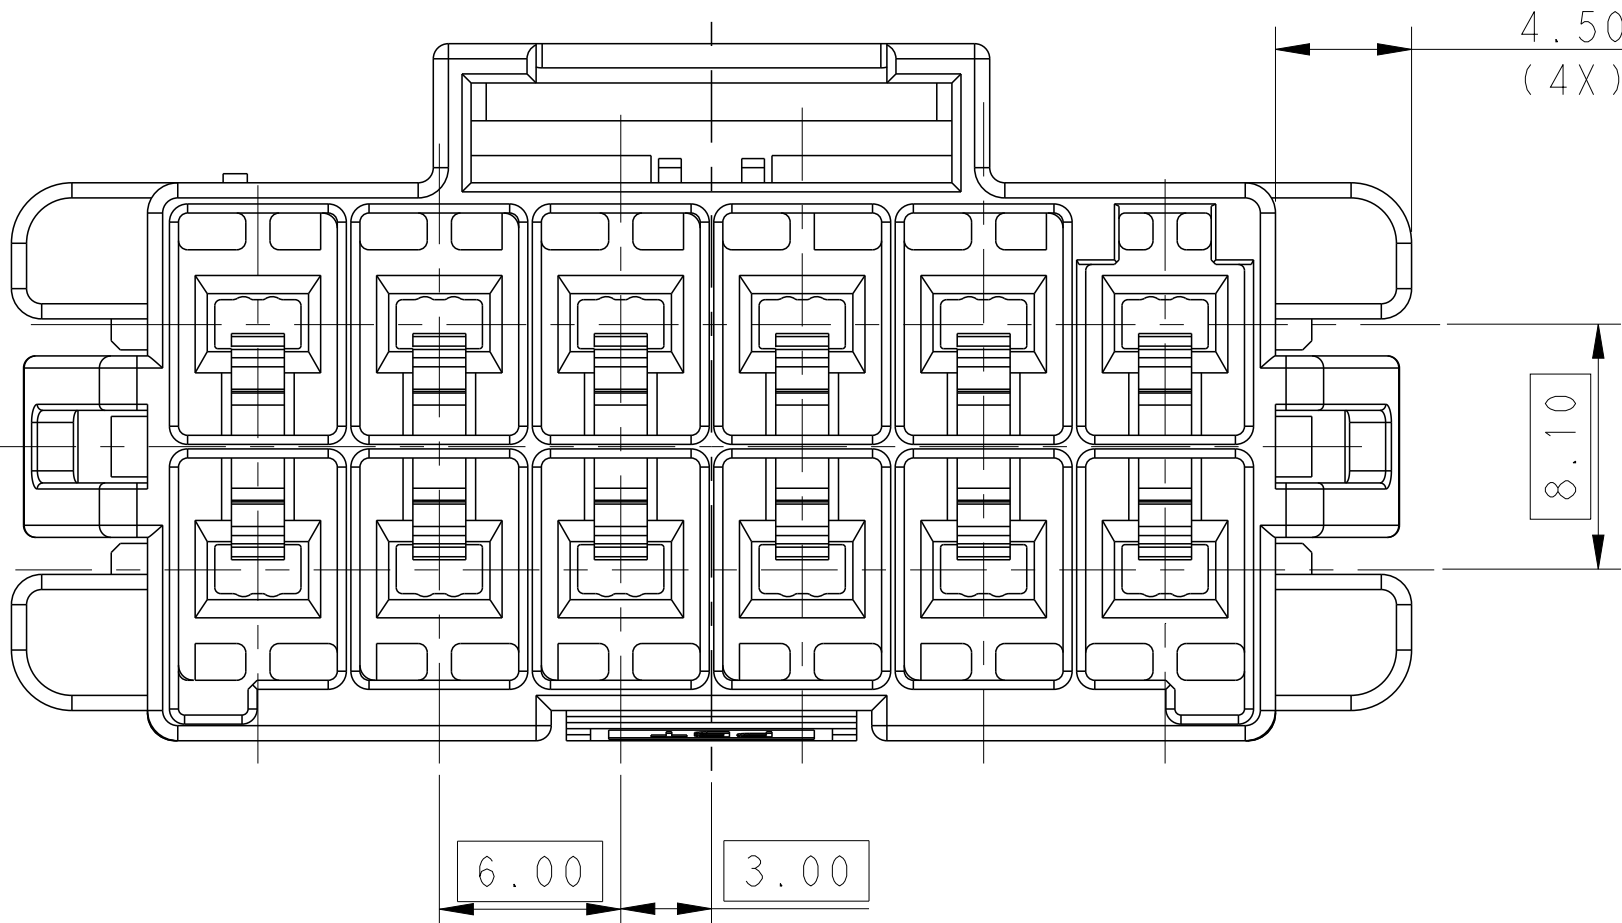

1 MATERIAL:
LEVEL 1:PBT, STANDARD TEMPERATURE 105°C
KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW

LEVEL 2:NYLON, HIGH TEMPERATURE 150°C
KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL

2 MATERIAL MARK:
LEVEL 1:PBT, LEVEL 2:HDT

3 APPLICABLE CONTACT P/N
TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*



4 MATING CONN, P/N
PLUG HSG: *-1971776-
TPA(LOCK PLATE): *-1971778-*

5 RECOMMENDED PANEL THICKNESS:1.0-2.0mm



6 THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

POS	A	B	C	D	E
2*6	39.70	45.5	37.30	42.70	37.80
2*5	33.70	39.5	31.30	36.70	31.80
2*4	27.70	33.5	25.30	30.70	25.80
2*3	21.70	27.5	19.30		



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU	06JUL2012	TE Connectivity	
DIMENSIONS:		CHK	HAPYE WU	06JUL2012		
mm		APVD		YUHONG MAO	NAME	
				PRODUCT SPEC	CAP HOUSING,PANEL MOUNT,DOUBLE ROW	
				108-106118	POWER TRIPLE LOCK	
				APPLICATION SPEC		
				114-106118		
				WEIGHT		
				-		
				Customer Drawing		
				SCALE		
				-		
				SHEET		
				1		
				OF		
				2		
				REV		
				C		

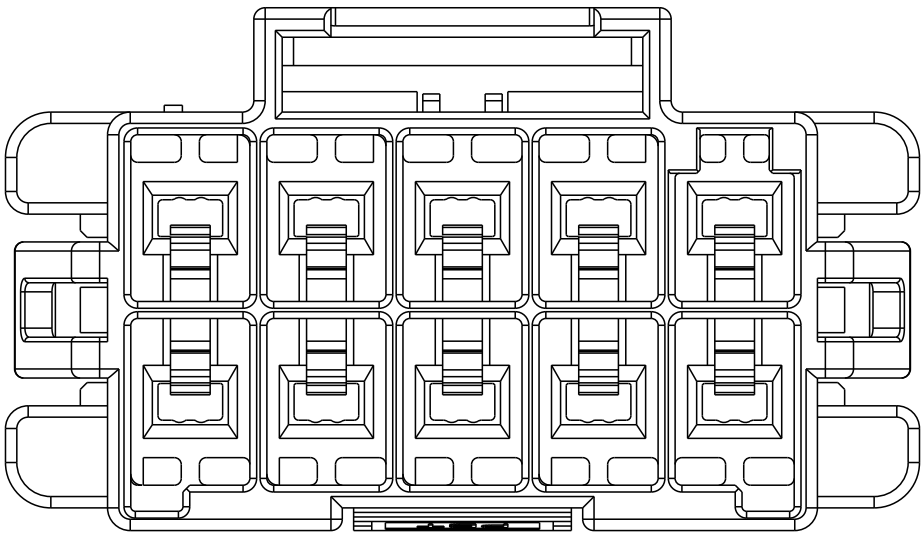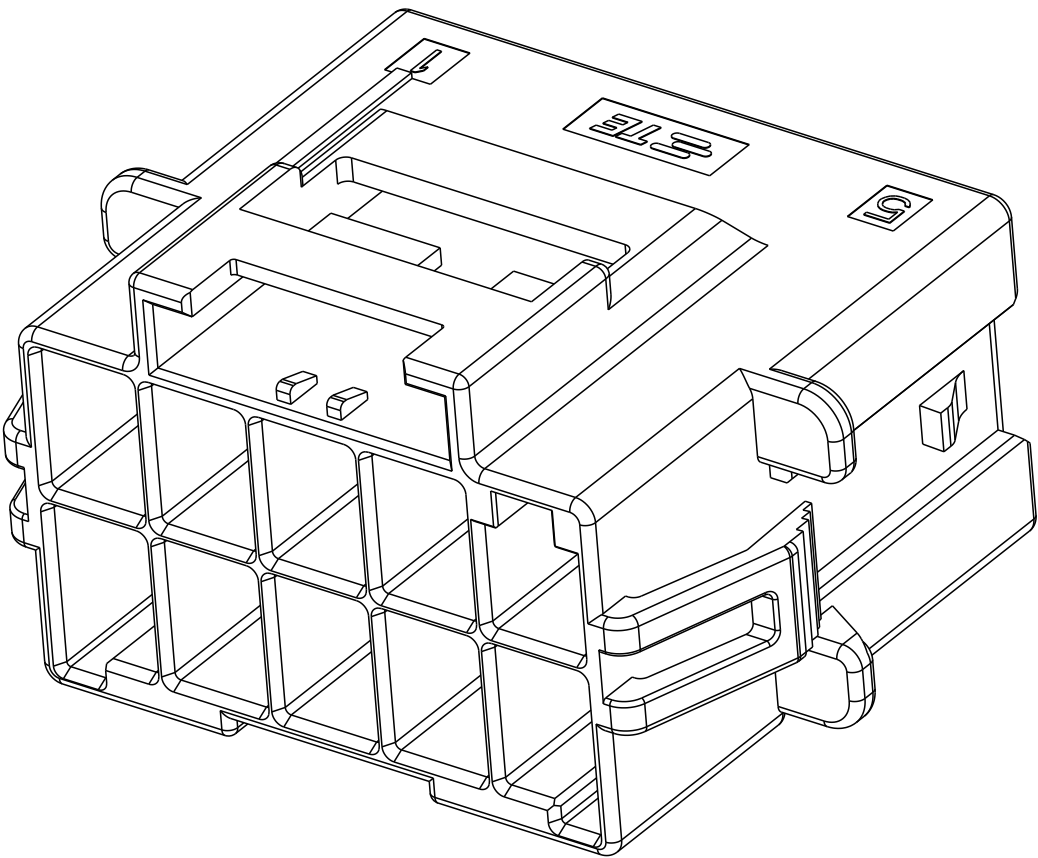


2*5 POSITIONS

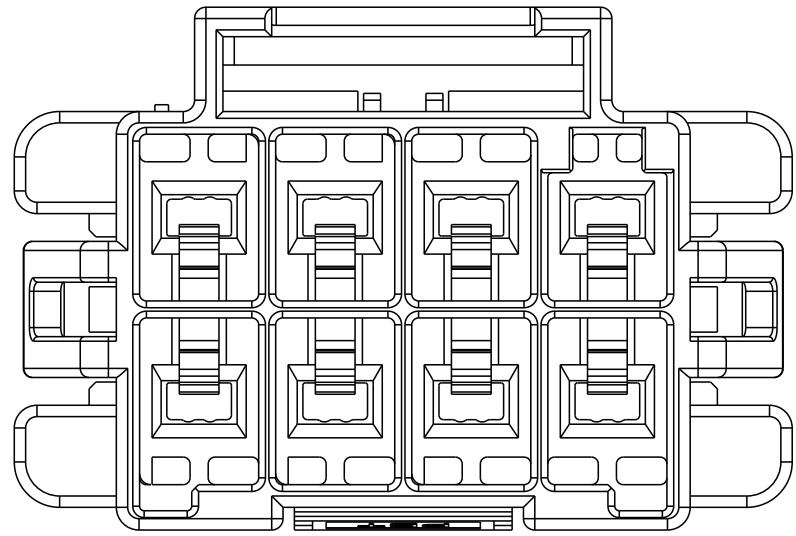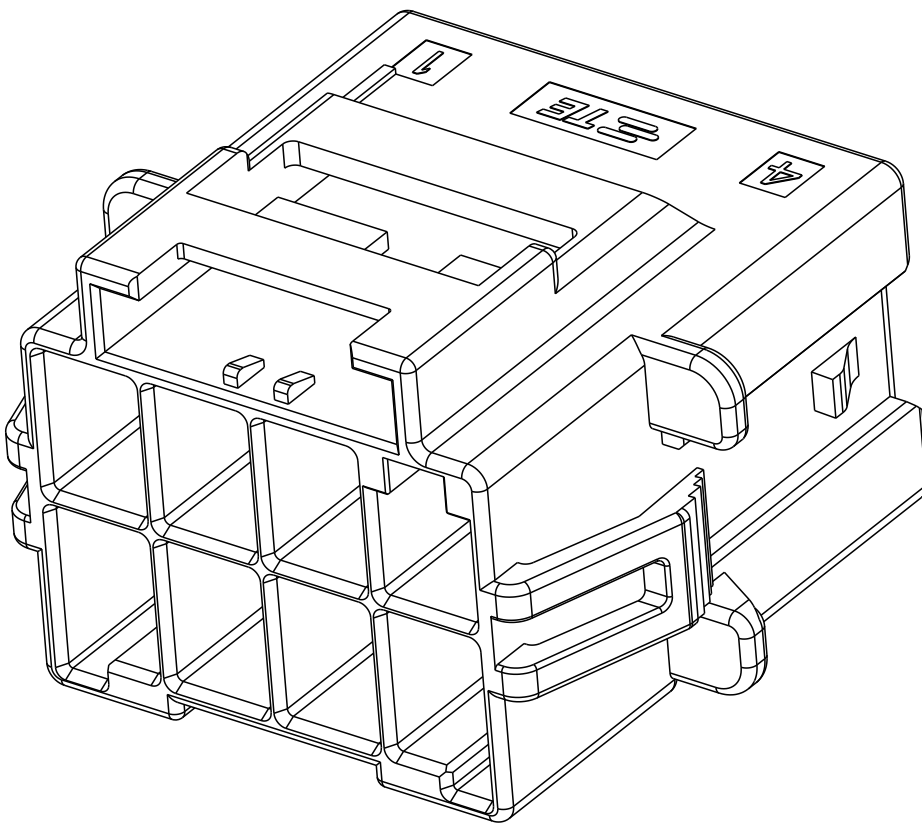


2*4 POSITIONS

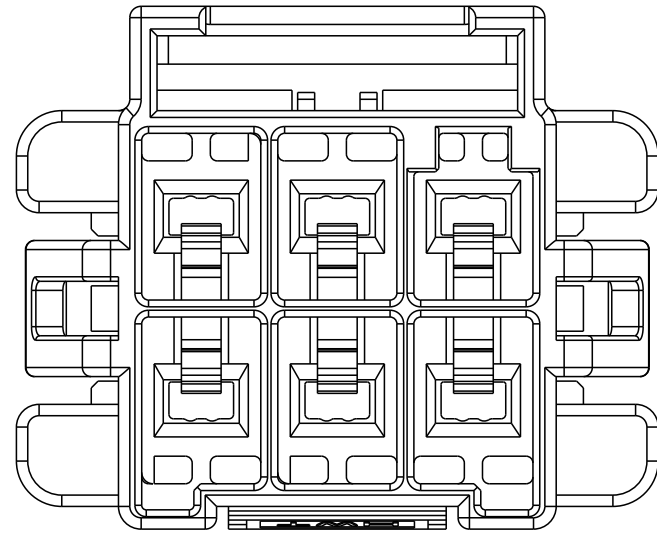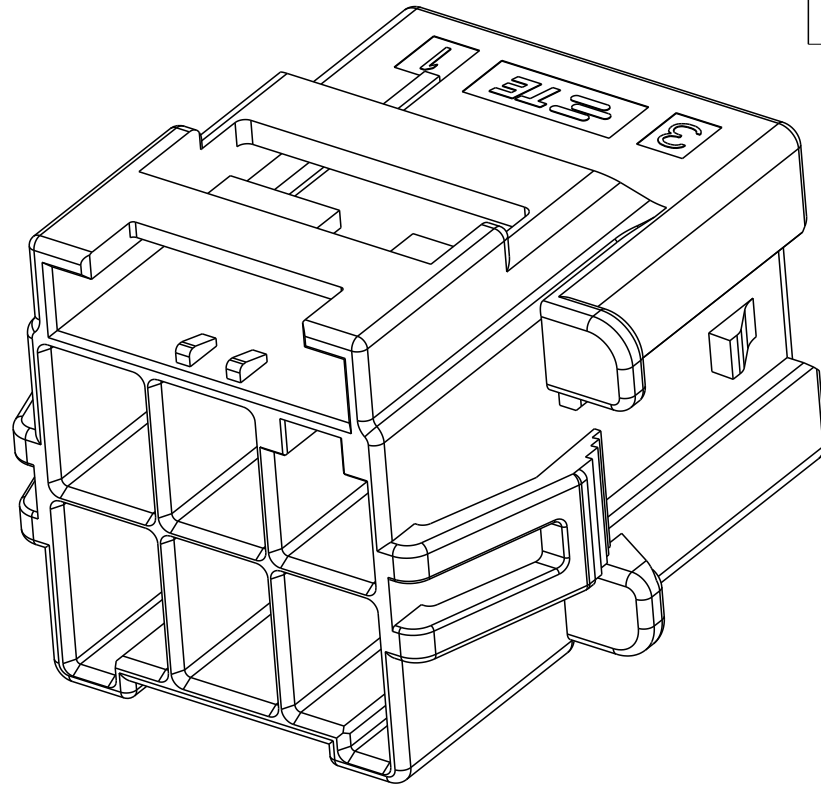


2*3 POSITIONS

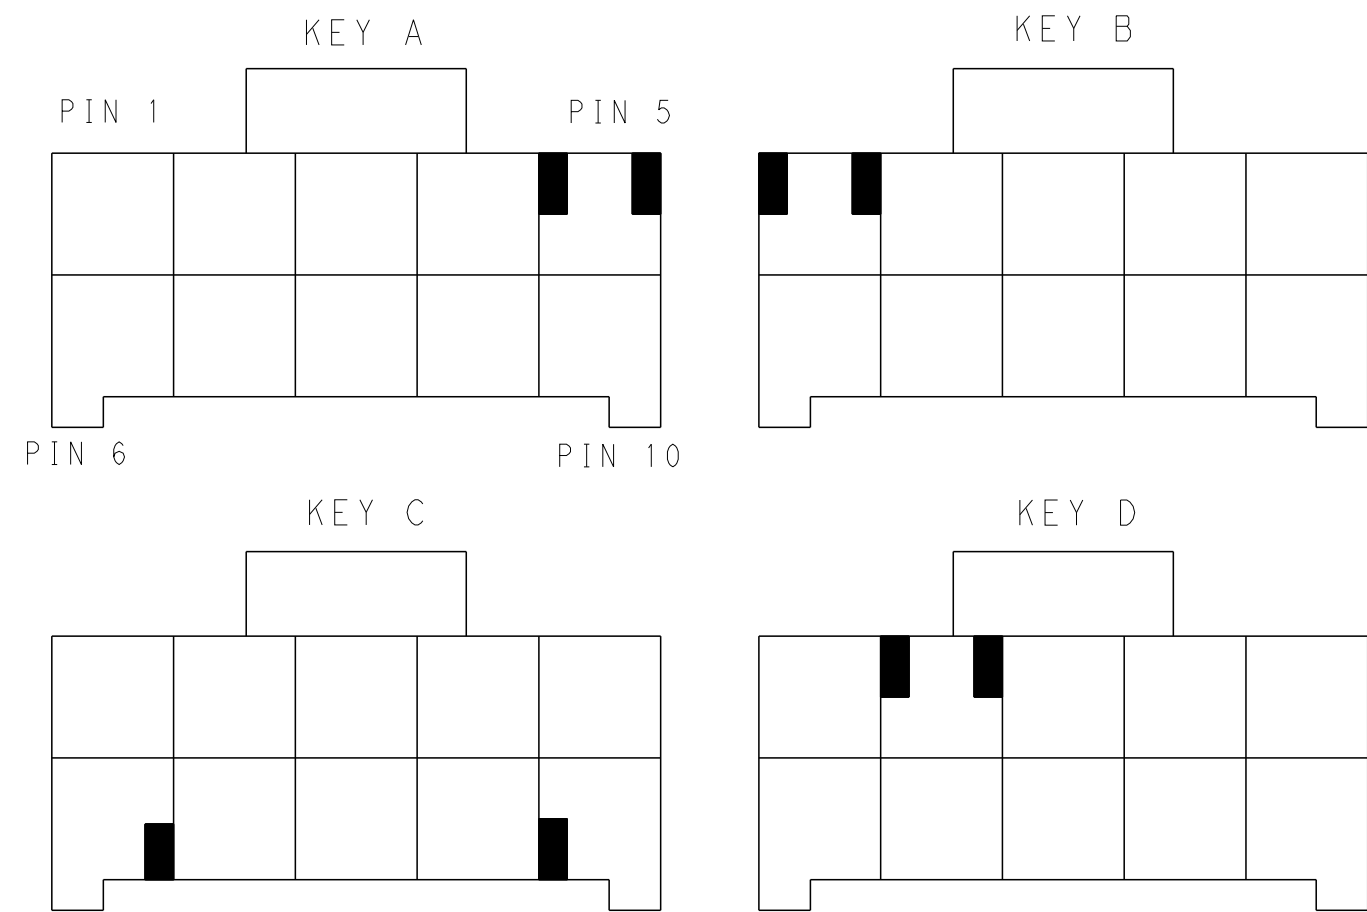



KEYING FOR 2*5 POS.

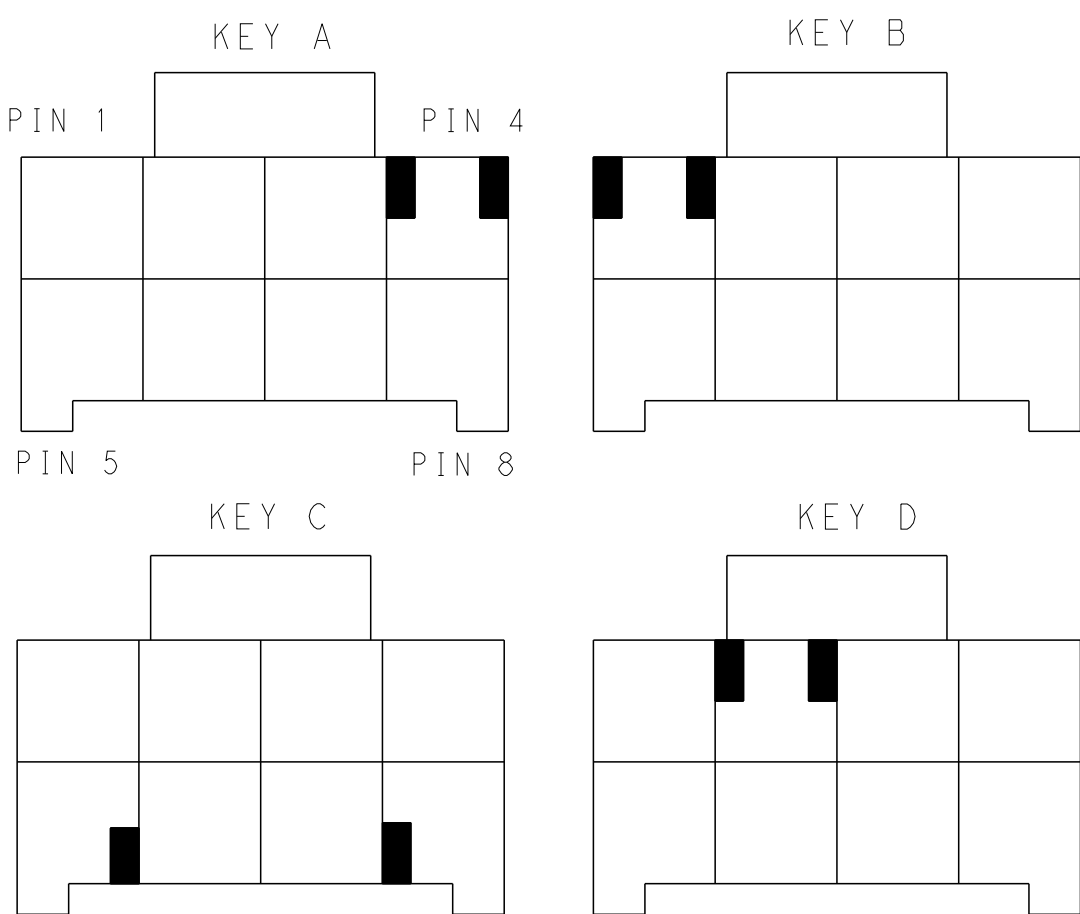


KEYING FOR 2*4 POS.

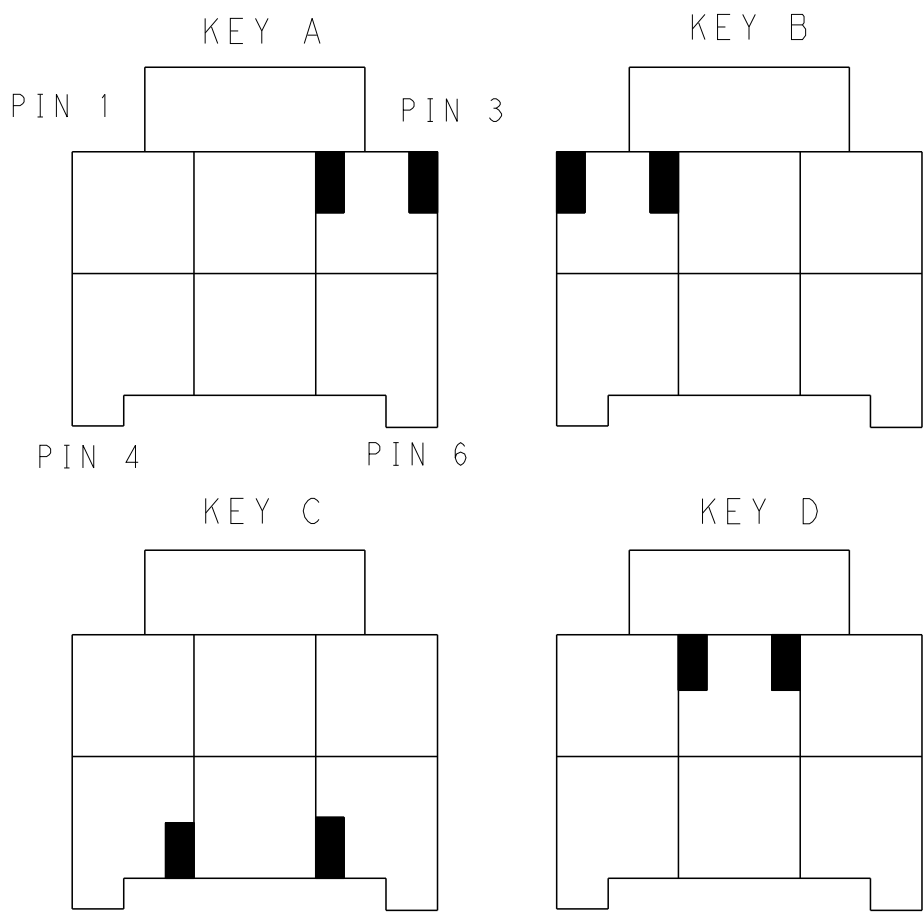

KEYING FOR 2*3 POS.

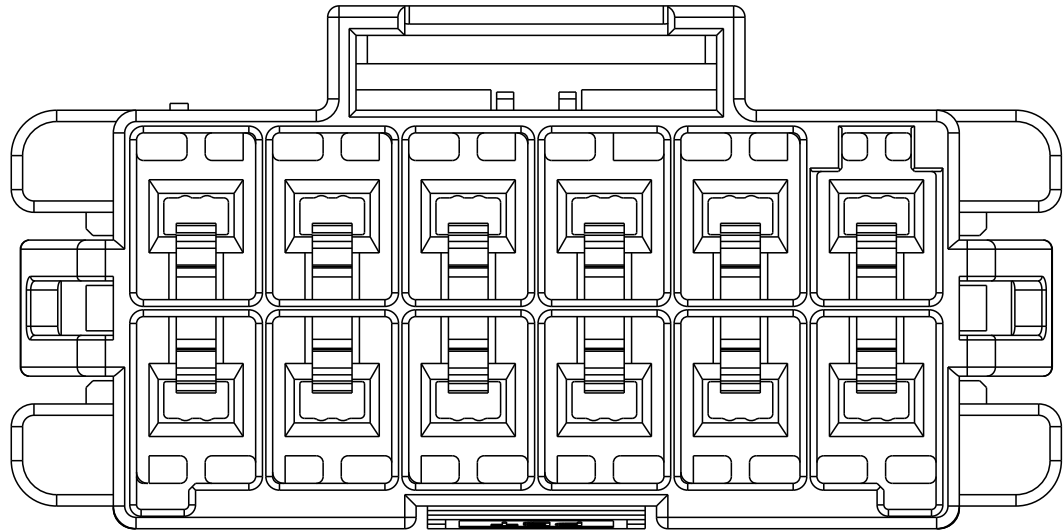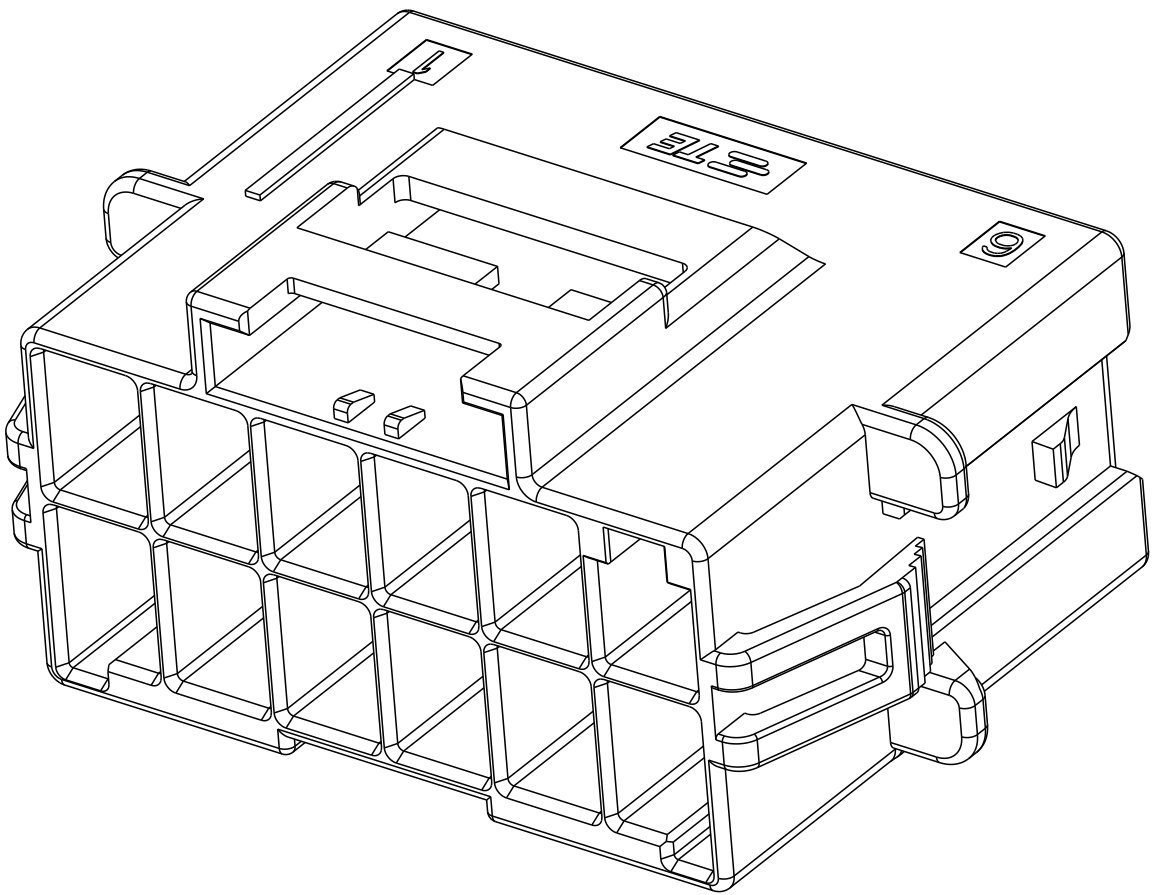

2*6 POSITIONS

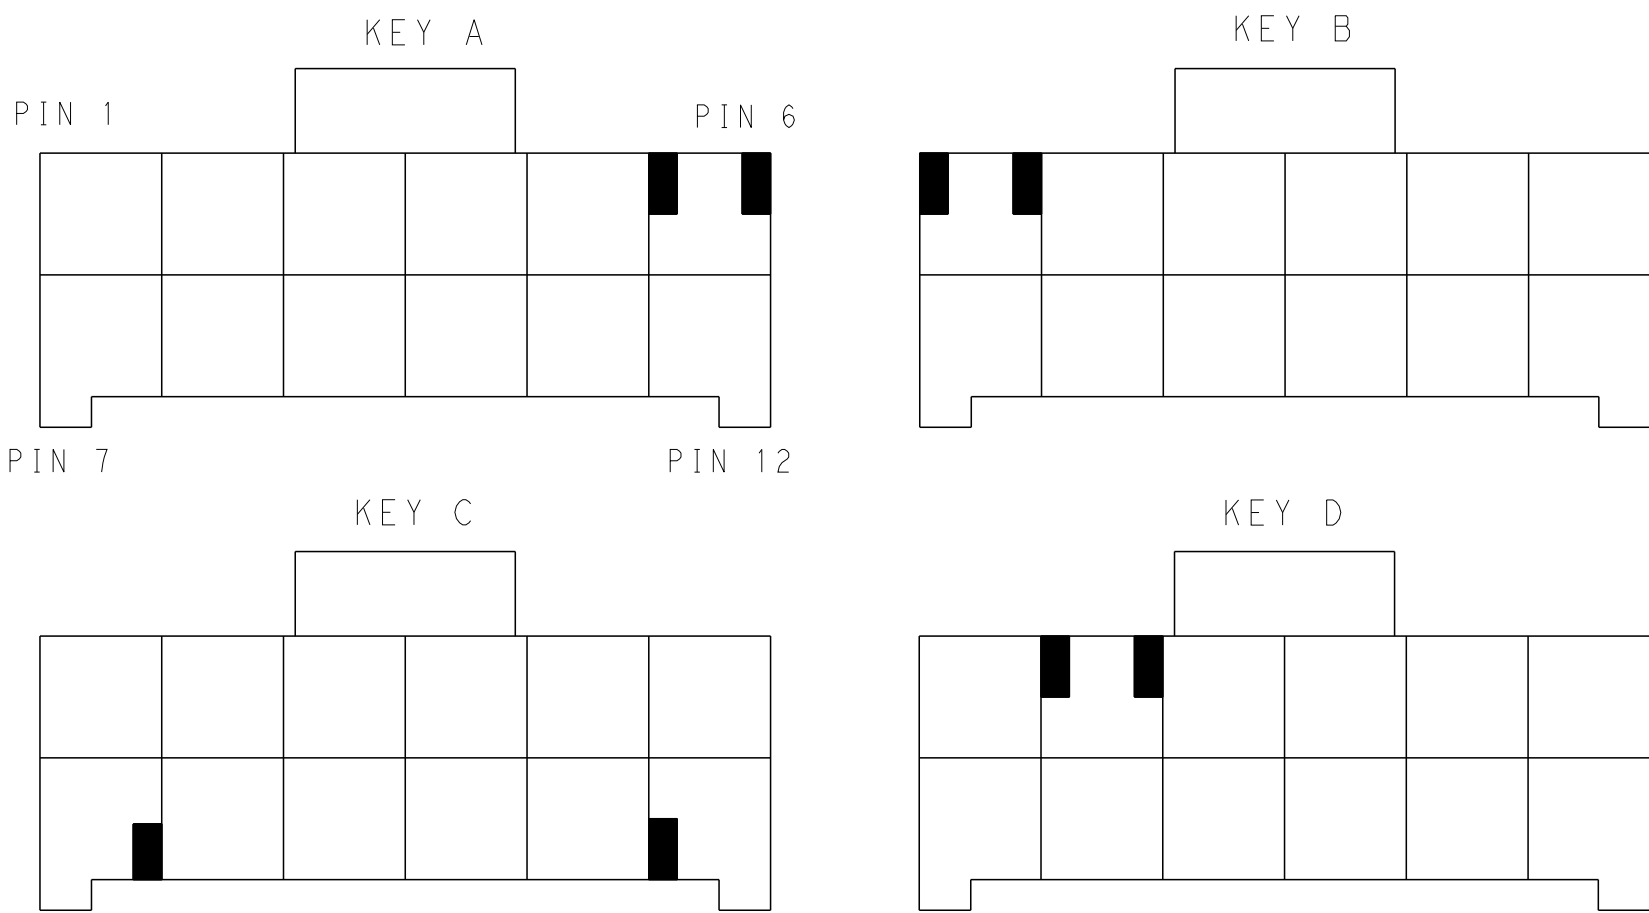

KEYING FOR 2*6 POS.

2*6	LEVEL 1	KEY A	1-1971775-6
		KEY B	2-1971775-6
LEVEL 2		KEY C	3-1971775-6
		KEY D	4-1971775-6
2*5	LEVEL 1	KEY A	5-1971775-6
		KEY B	6-1971775-6
LEVEL 2		KEY C	7-1971775-6
		KEY D	8-1971775-6
POS.	MATERIAL	KEY	P/N

2*4	LEVEL 1	KEY A	1-1971775-4
		KEY B	2-1971775-4
LEVEL 2		KEY C	3-1971775-4
		KEY D	4-1971775-4
2*3	LEVEL 1	KEY A	5-1971775-4
		KEY B	6-1971775-4
LEVEL 2		KEY C	7-1971775-4
		KEY D	8-1971775-4
POS.	MATERIAL	KEY	P/N

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-1971775-4](#)