

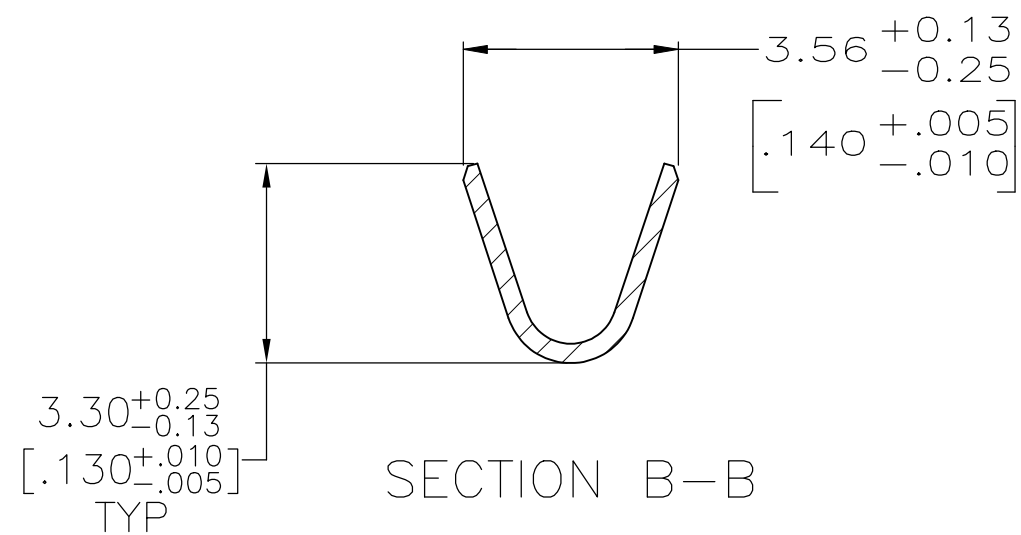



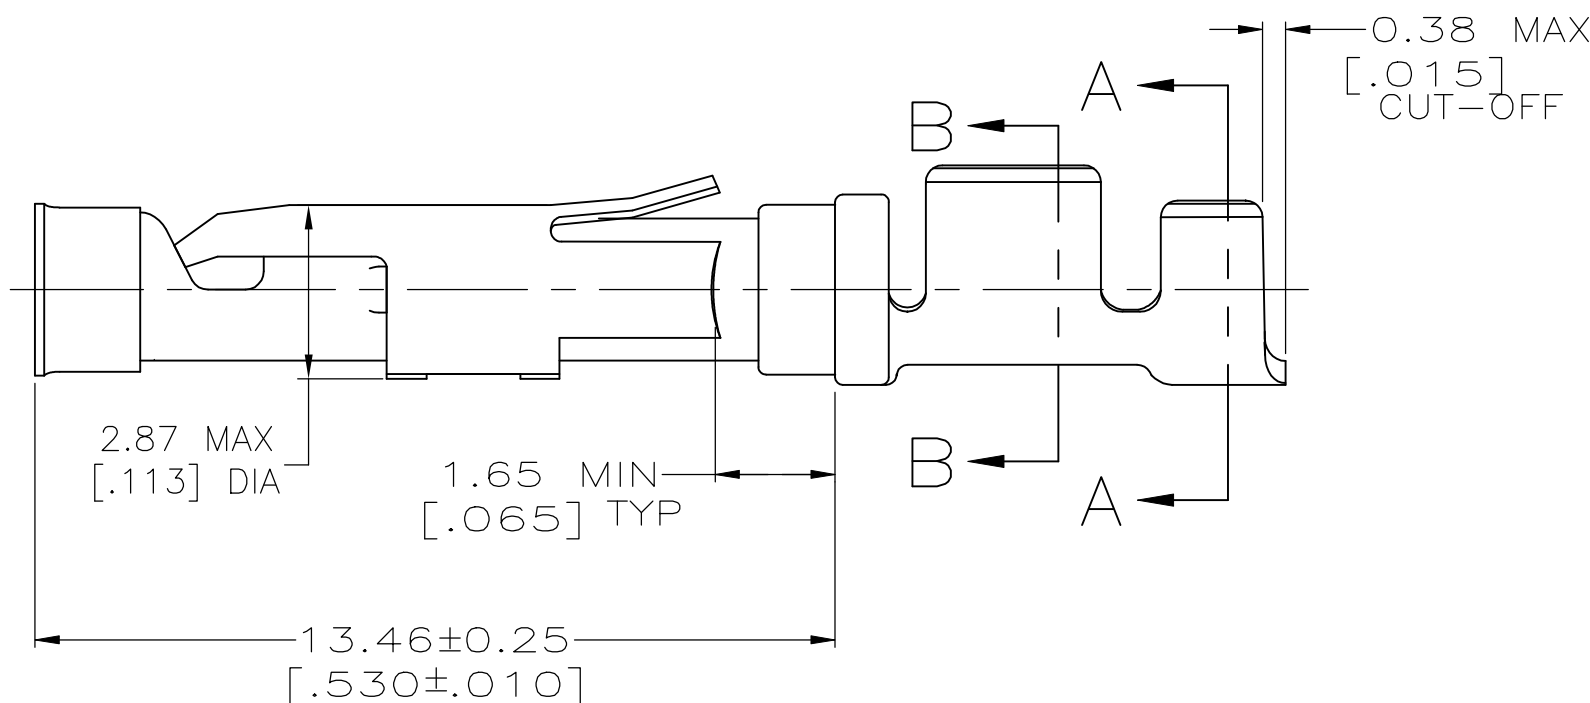














REVISIONS						
P	LTR	DESCRIPTION	DATE	DWN	APVD	
	J1	REVISED PER ECO-14-001124	24JAN2014	NK	MZ	
	J2	REVISED PER ECO-18-006394	27APR2018	RS	MZ	

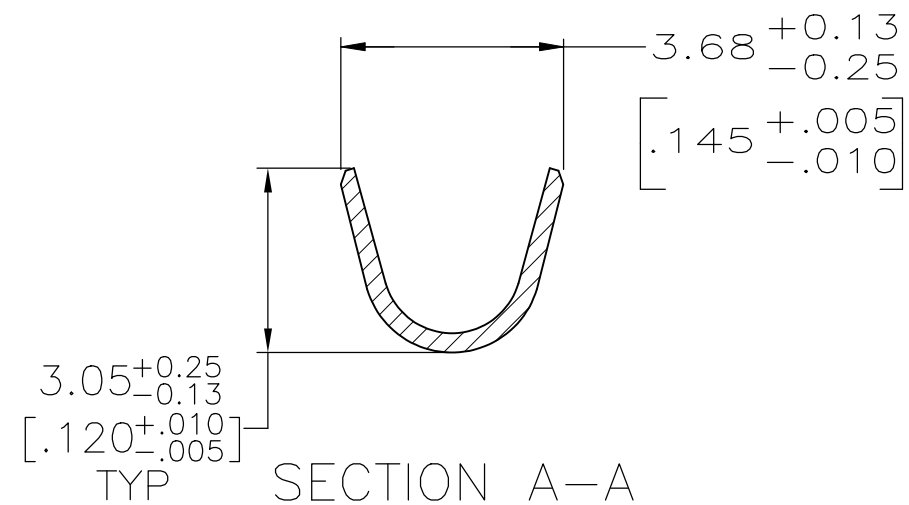

- 1 0.76μm [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON THE REMAINDER OVER 0.76μm [.000030] MIN NICKEL PER QQ-N-290.
- 2 1.27μm [.000050] MIN TIN-LEAD PER MIL-T-10727 OVER 0.76μm [.000030] MIN NICKEL PER QQ-N-290.
- 3 0.76μm [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH A UNIFORM GRADIENT TO 0.25μm [.000010] MIN GOLD PER MIL-G-45204 ON THE REMAINDER OVER 0.76μm [.000030] MIN NICKEL PER QQ-N-290.
- 4 0.38μm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH 1.27μm [.000050] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 0.76μm [.000030] MIN NICKEL PER QQ-N-290.
- 5 GOLD PLATING NOT REQUIRED IN THIS AREA.
- 6 WIRE RANGE 18-14 AWG.
INSULATION RANGE 2.03[.080]-2.54[.100].
- 7 0.38μm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN, 1.27μm [.000050] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 5.69 [.224] MIN ON OPPOSITE END, BOTH OVER 1.27μm [.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.
- 8 1.27μm [.000050] MIN TIN PER MIL-T-10727 OVER 0.76μm [.000030] MIN NICKEL PER QQ-N-290.
- 9 0.76μm [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08[.200]MIN WITH 1.27μm [.000050] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 0.76μm [.000050] MIN NICKEL PER QQ-N-290.

	STANDARD		CU-NI ALLOY	2-66358-1	1-66360-6
	STANDARD		CU-NI ALLOY	2-66358-0	1-66360-5
	STANDARD		CU-NI ALLOY	1-66358-9	1-66360-4
	SMALL PACK		BRASS	1-66358-6 OR 1-66358-7	1-66360-3
	STANDARD		BRASS	1-66358-6 OR 1-66358-7	1-66360-2
	SMALL PACK		BRASS	66358-4	1-66360-1
	SMALL PACK		BRASS	66358-2	1-66360-0
OBSOLETE	STANDARD		BRASS	1-66358-5	66360-9
	STANDARD		PHOSPHOR BRONZE	1-66358-3	66360-8
OBSOLETE	STANDARD		PHOSPHOR BRONZE	1-66358-2	66360-7
	STANDARD		BRASS	66358-4	66360-4
	STANDARD		BRASS	66358-3	66360-3
	STANDARD		BRASS	66358-2	66360-2
	STANDARD		BRASS	66358-1	66360-1
	PACKAGING	BODY FINISH	BODY MATERIAL	STRIP P/N REF	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.SIPE 06/03/92		 TE Connectivity Ltd.	
		CHK WLENKER 6-11-92			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SOCKET ASSEMBLY, LOOSE PIECE, TYPE III+	
		APVD G.STEINHAUER 7-8-92			
0 PLC ± — 1 PLC ± — 2 PLC ± 0,13 [.005] 3 PLC ± — 4 PLC ± — ANGLES ± ±		PRODUCT SPEC —			
MATERIAL		APPLICATION SPEC —			
SEE CALLOUTS		FINISH		SIZE A2	
		WEIGHT		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO G-66360	
				RESTRICTED TO —	
				SCALE 8:1	
				SHEET 1 of 1	
				REV J2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[66360-1](#) [66360-2](#) [66360-3](#)