


Dec.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

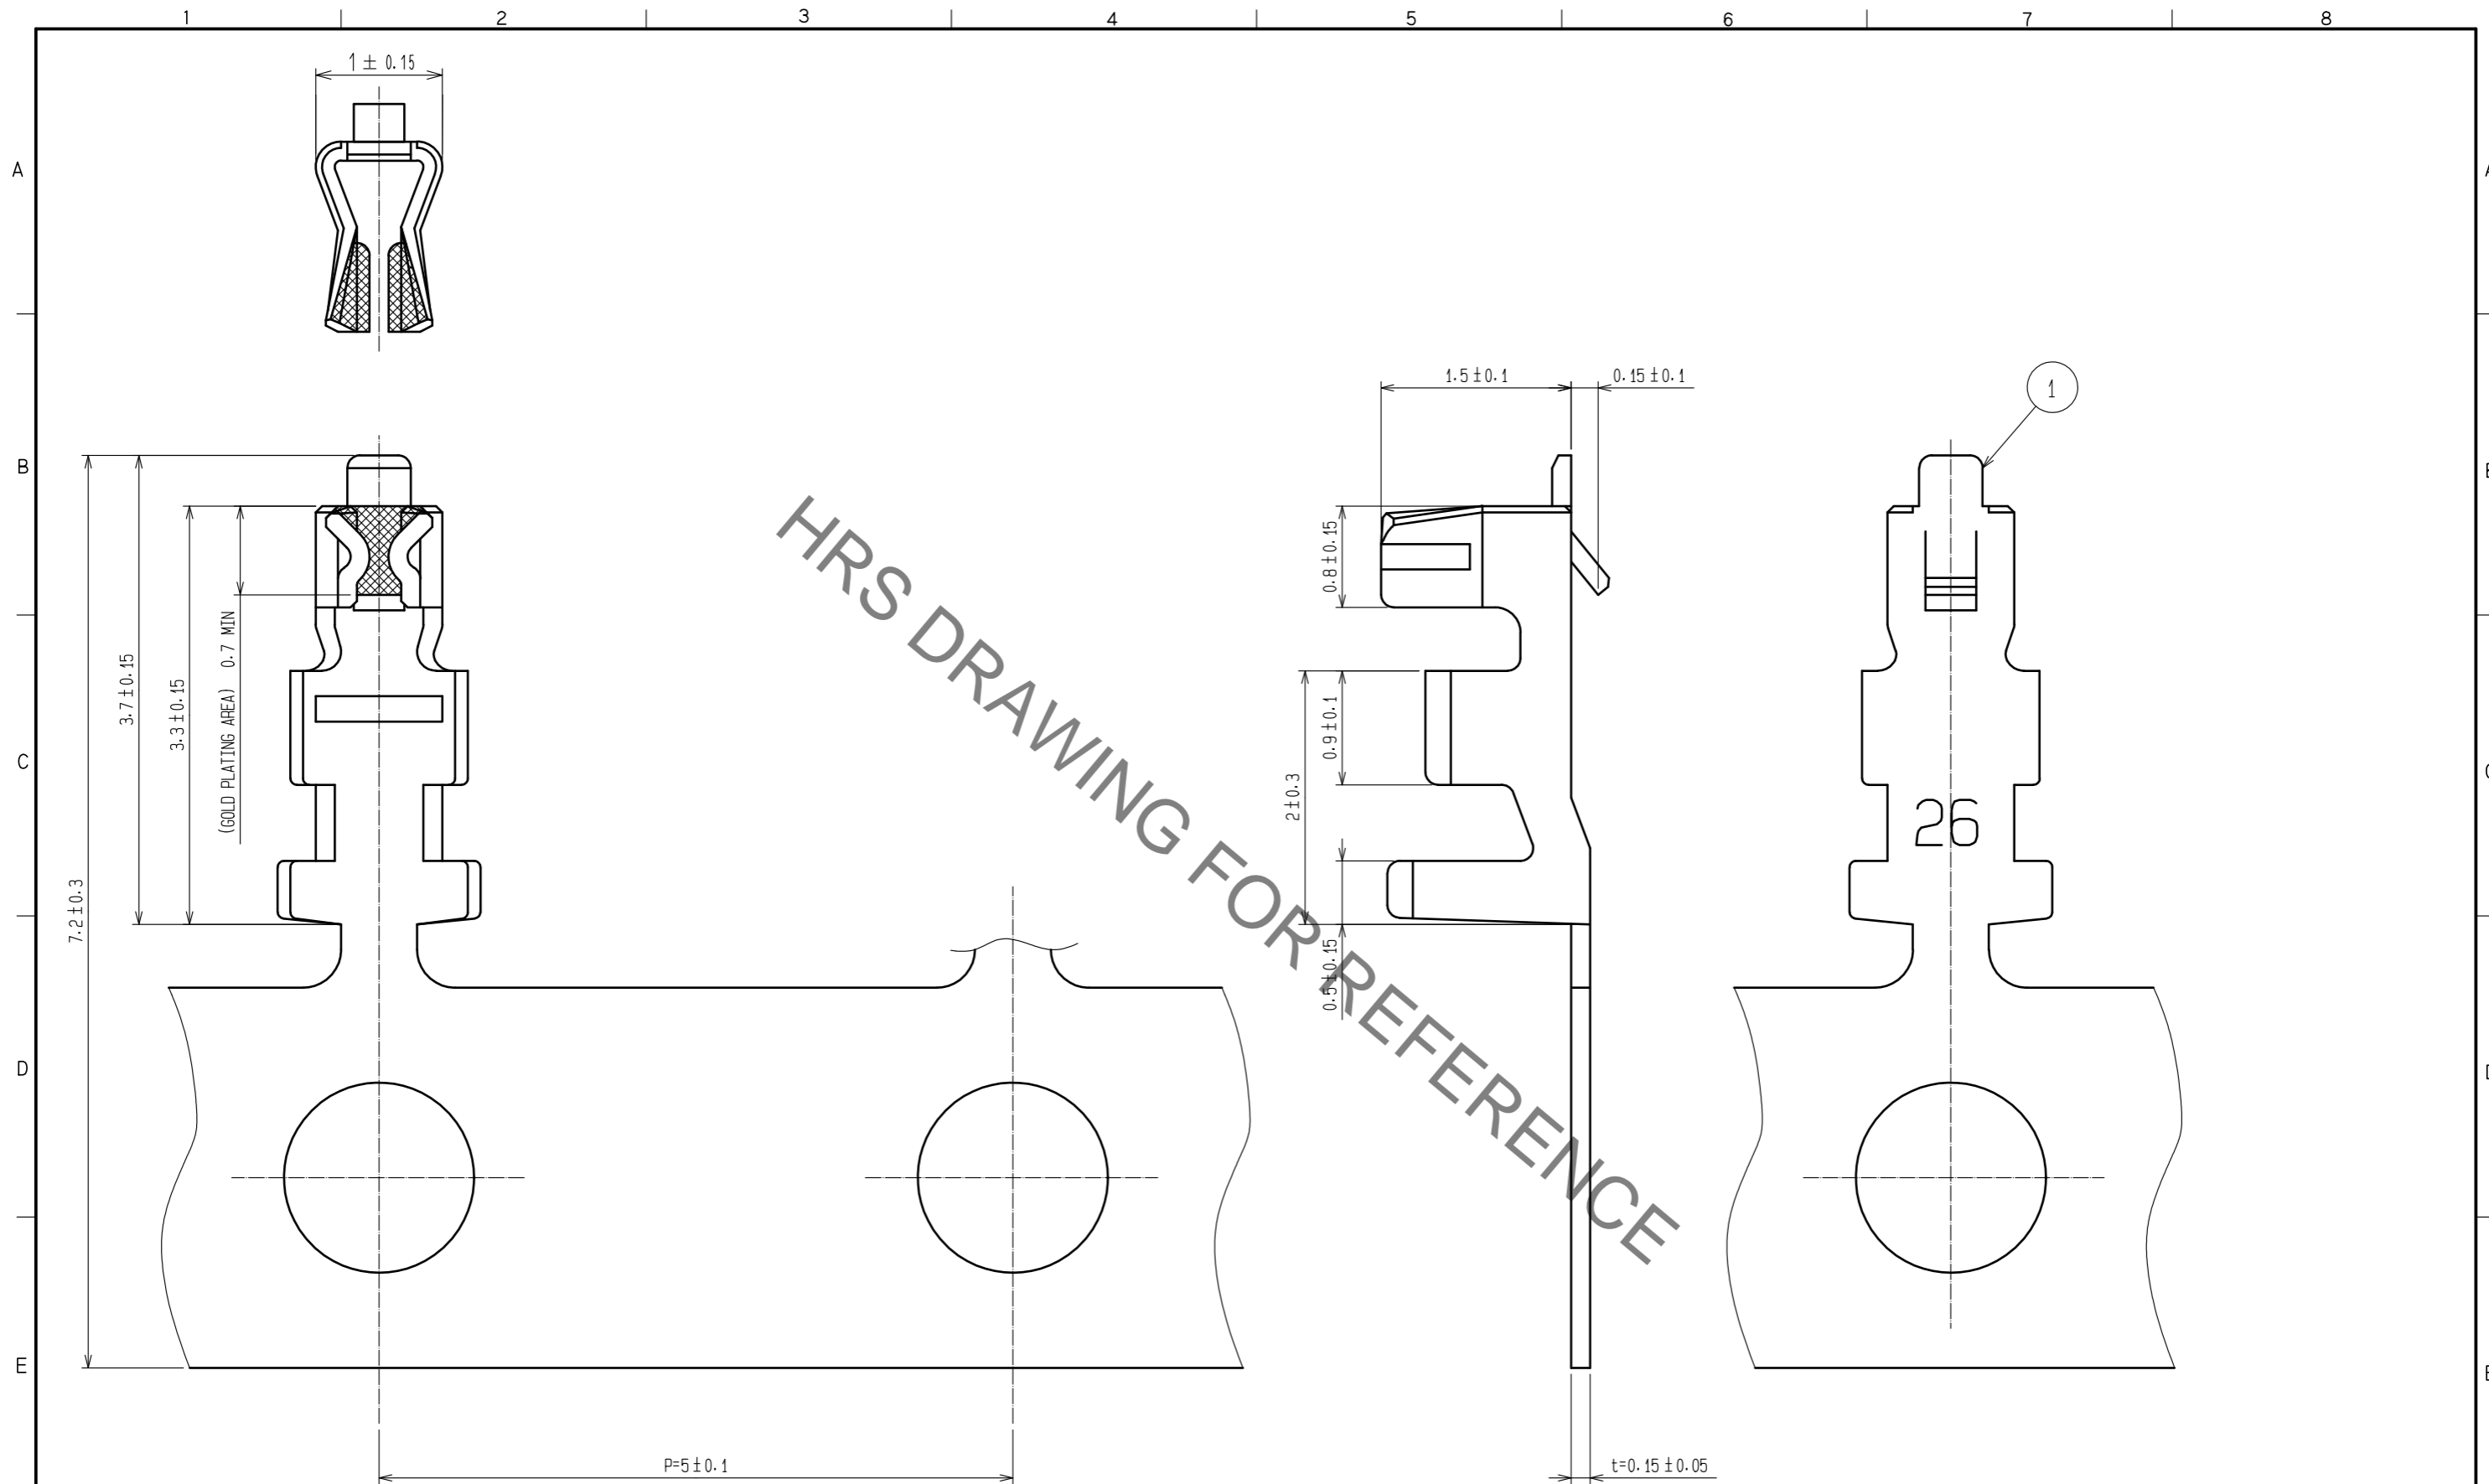

NOTES 1: APPLICABLE WIRE : 26 - 30 AWG  
 2: 1 REEL 10000 CONTACTS  
 △ OUTER DIAMETER :  $\phi 0.56 - \phi 1.0$  mm

NO. 1		MATERIAL PHOSPHOR BRONZE		FINISH . REMARKS CONTACT AREA:GOLD PLATING 0.2 $\mu$ m min OTHERS:NICKEL PLATING 0.5 $\mu$ m min	
UNITS mm	SCALE 20: 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00004809	DESIGNED HT. SATO	CHECKED SZ. ONO
APPROVED : KJ. KATAYOSE 20050105		DRAWING NO. EDC-071220-00-00		DATE 20190425	
CHECKED : TY. OMA 20050105		PART NO. DF13-2630SCFA			
DESIGNED : TS. KUMAZAWA 20050105		CODE NO. CL536-0298-5-00			
DRAWN : TS. KUMAZAWA 20050105				1/1	