

4

3

2


1

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT BY ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
FB	00	P	LTR	DESCRIPTION	DATE	DWN APVD
			B1	REVISED PER ECO-11-005033	2APR11	RK HMR

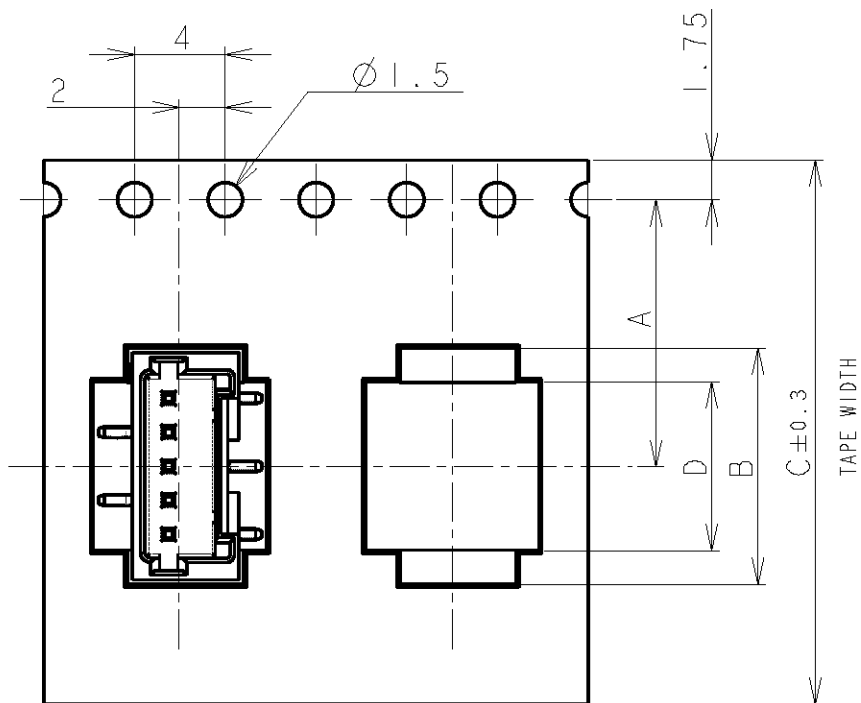

TYPE 1

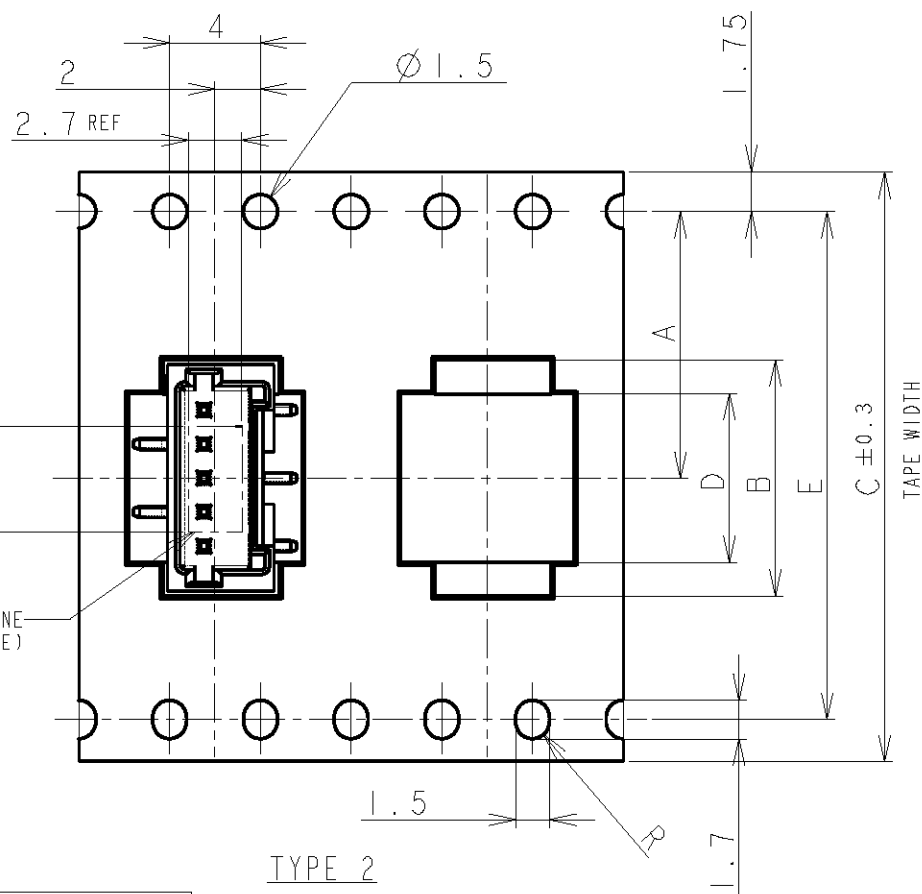




TYPE 2

VACUUM NOZZLE OUTLINE
(FOR REFERENCE)

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

10> : ±0.2
30> * >10 : ±0.25
100> * >30 : ±0.3
ANGLE : ±3°

NOTE:
1. PEELING STRENGTH: 0.20-0.69N (20-70gf)
PEELING ANGLE: 165-180°
PEELING SPEED: 300mm/MINUTE.

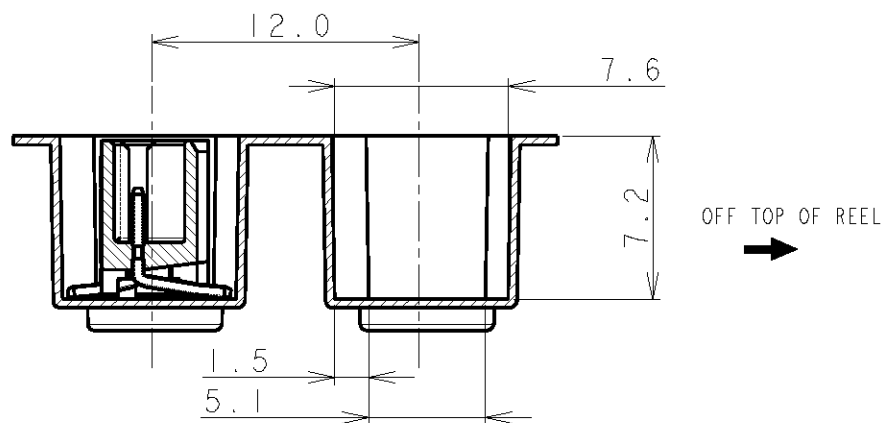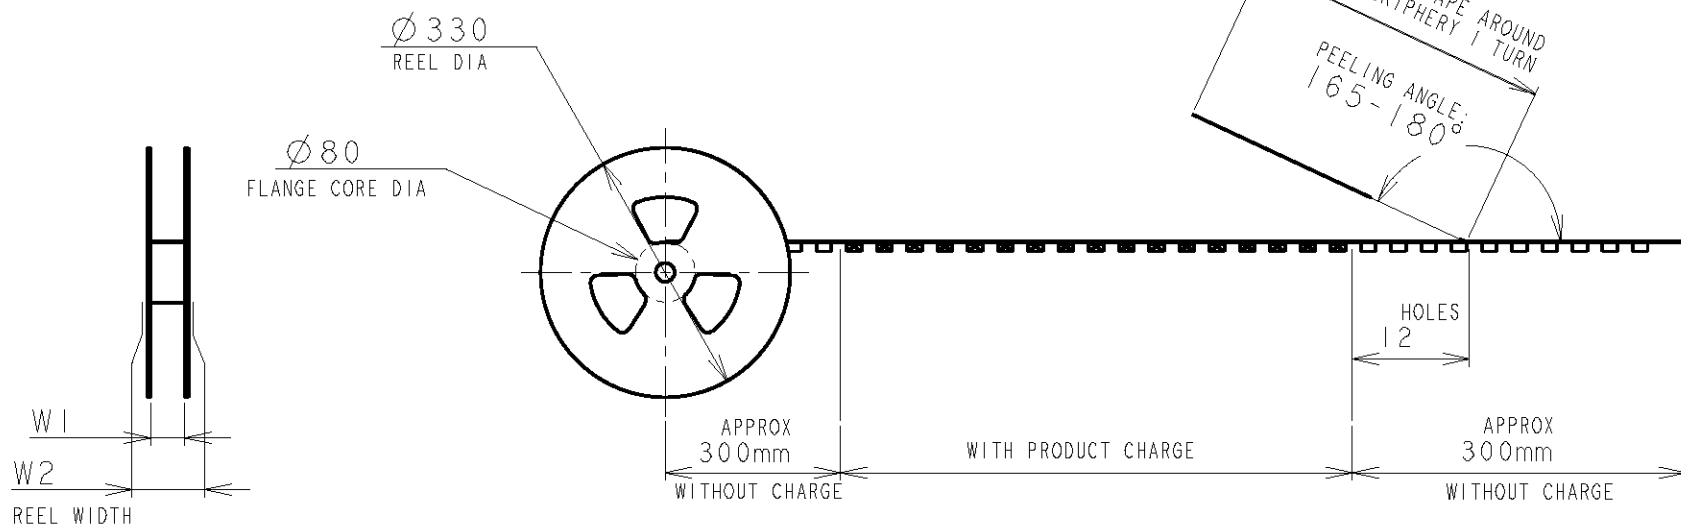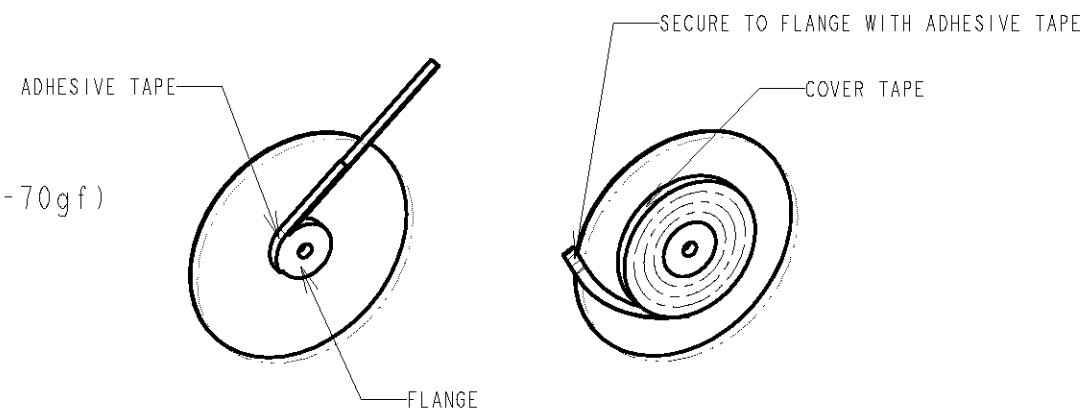

DIMENSIONS: mm		DWN S.XU	31JAN03	TE TE Connectivity	
		CHK S.YAO	31JAN03		
		APVD T.SASAKI	31JAN03	NAME AMP Mini Common Terminated (CT) Connector 1.5mm PITCH SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS, EMBOSS TAPE PACKAGED	
		PRODUCT SPEC 108-60018			
MATERIAL		APPLICATION SPEC 114-5223		SIZE A3	CAGE CODE 00779
		WEIGHT		DRAWING NO C-292230	RESTRICTED TO -
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CUSTOMER DRAWING		SCALE NON	SHEET 1
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		SEE L.H.S.		OF 4	REV B1
FINISH					

THIS DRAWING IS UNPUBLISHED.
ALL RIGHTS RESERVED.

© COPYRIGHT BY

LOC	DIST	REVISIONS							
FB	00	P	LTR	DESCRIPTION			DATE	DWN	APVD
				SEE SHEET 1					


	TYPE 2	49.5	45.5	6.2	40.4	29.9	44	32.9	20.2±0.15	500	20	BLACK	7-292230-0
		49.5	45.5	4.7	40.4	28.4	44	31.4		500	19		6-292230-9
		49.5	45.5	6.2	40.4	26.9	44	29.9		500	18		6-292230-8
		49.5	45.5	4.7	40.4	25.4	44	28.4		500	17		6-292230-7
		49.5	45.5	6.2	40.4	23.9	44	26.9		500	16		6-292230-6
		49.5	45.5	4.7	40.4	22.4	44	25.4		500	15		6-292230-5
		49.5	45.5	6.2	40.4	20.9	44	23.9		500	14		6-292230-4
		49.5	45.5	4.7	40.4	19.4	44	22.4		500	13		6-292230-3
		37.5	33.5	6.2	28.4	17.9	32	20.9	14.2	500	12		6-292230-2
		37.5	33.5	4.7	28.4	16.4	32	19.4	14.2	500	11		6-292230-1
		37.5	33.5	6.2	28.4	14.9	32	17.9	14.2	500	10		6-292230-0
		37.5	33.5	4.7	28.4	13.4	32	16.4	14.2	500	9		5-292230-9
	TYPE 1	29.5	25.5	6.2	-	11.9	24	14.9	11.5	500	8		5-292230-8
		29.5	25.5	4.7	-	10.4	24	13.4	11.5	500	7		5-292230-7
		29.5	25.5	6.2	-	8.9	24	11.9	11.5	500	6		5-292230-6
		29.5	25.5	4.7	-	7.4	24	10.4	11.5	500	5		5-292230-5
		21.5	17.5	6.2	-	5.9	16	8.9	7.5	500	4		5-292230-4
		21.5	17.5	4.7	-	4.4	16	7.4	7.5	500	3		5-292230-3
		21.5	17.5	2.8	-	2.9	16	5.9	7.5	500	2		-
		TAPE TYPE	W2	W1	F	E	D	C	B	A	QTY/ REEL		POS
DIMENSIONS													

	TYPE 2	49.5	45.5	6.2	40.4	29.9	44	32.9	20.2±0.15	500	20	BEIGE	2-292230-0
		49.5	45.5	4.7	40.4	28.4	44	31.4		500	19		1-292230-9
		49.5	45.5	6.2	40.4	26.9	44	29.9		500	18		1-292230-8
		49.5	45.5	4.7	40.4	25.4	44	28.4		500	17		1-292230-7
		49.5	45.5	6.2	40.4	23.9	44	26.9		500	16		1-292230-6
		49.5	45.5	4.7	40.4	22.4	44	25.4		500	15		1-292230-5
		49.5	45.5	6.2	40.4	20.9	44	23.9		500	14		1-292230-4
		49.5	45.5	4.7	40.4	19.4	44	22.4		500	13		1-292230-3
		37.5	33.5	6.2	28.4	17.9	32	20.9	14.2	500	12		1-292230-2
		37.5	33.5	4.7	28.4	16.4	32	19.4	14.2	500	11		1-292230-1
		37.5	33.5	6.2	28.4	14.9	32	17.9	14.2	500	10		1-292230-0
		37.5	33.5	4.7	28.4	13.4	32	16.4	14.2	500	9		292230-9
	TYPE 1	29.5	25.5	6.2	-	11.9	24	14.9	11.5	500	8		292230-8
		29.5	25.5	4.7	-	10.4	24	13.4	11.5	500	7		292230-7
		29.5	25.5	6.2	-	8.9	24	11.9	11.5	500	6		292230-6
		29.5	25.5	4.7	-	7.4	24	10.4	11.5	500	5		292230-5
		21.5	17.5	6.2	-	5.9	16	8.9	7.5	500	4		292230-4
		21.5	17.5	4.7	-	4.4	16	7.4	7.5	500	3		292230-3
		21.5	17.5	2.8	-	2.9	16	5.9	7.5	500	2		-
TAPE TYPE	W2	W1	F	E	D	C	B	A	QTY/ REEL	POS	COLOR	ON TAPE P/N	
	DIMENSIONS												

DIMENSIONS: mm	DWN	MATERIAL	FINISH
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.1 2 PLC ±0.01 3 PLC ±0.001 4 PLC ±0.0001 ANGLES ±-	CHK	 TE Connectivity	
PRODUCT SPEC SEE SHEET 1 OF 4	APVD	NAME AMP Mini Common Terminated (CT) Connector 1.5mm PITCH SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS, EMBOSS TAPE PACKAGED	
APPLICATION SPEC SEE SHEET 1 OF 4	WEIGHT	SIZE A4	CAGE CODE 00779
CUSTOMER DRAWING		DRAWING NO C-292230	
		SCALE NON	SHEET 2 OF 4
			REV B1

LOC	DIST	REVISIONS					
FB	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

0.98	31.5	32.5	30.6	28.5	20	7-292230-0	2-292230-0
0.93	30.0	31.0	29.1	27.0	19	6-292230-9	1-292230-9
0.89	28.5	29.5	27.6	25.5	18	6-292230-8	1-292230-8
0.84	27.0	28.0	26.1	24.0	17	6-292230-7	1-292230-7
0.80	25.5	26.5	24.6	22.5	16	6-292230-6	1-292230-6
0.75	24.0	25.0	23.1	21.0	15	6-292230-5	1-292230-5
0.71	22.5	23.5	21.6	19.5	14	6-292230-4	1-292230-4
0.66	21.0	22.0	20.1	18.0	13	6-292230-3	1-292230-3
0.62	19.5	20.5	18.6	16.5	12	6-292230-2	1-292230-2
0.57	18.0	19.0	17.1	15.0	11	6-292230-1	1-292230-1
0.52	16.5	17.5	15.6	13.5	10	6-292230-0	1-292230-0
0.48	15.0	16.0	14.1	12.0	9	5-292230-9	292230-9
0.43	13.5	14.5	12.6	10.5	8	5-292230-8	292230-8
0.39	12.0	13.0	11.1	9.0	7	5-292230-7	292230-7
0.34	10.5	11.5	9.6	7.5	6	5-292230-6	292230-6
0.30	9.0	10.0	8.1	6.0	5	5-292230-5	292230-5
0.25	7.5	8.5	6.6	4.5	4	5-292230-4	292230-4
0.20	6.0	7.0	5.1	3.0	3	5-292230-3	292230-3
0.17	4.5	5.5	3.6	1.5	2	-	-
WEIGHT (g)	D	C	B	A	Pos.	BLACK	BEIGE (NAT)
	DIMENSIONS					P/N	

DIMENSIONS: mm		DWN	MATERIAL SEE SHEET 1		FINISH SEE SHEET 1	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		CHK	 TE Connectivity			
		APVD				
		PRODUCT SPEC	NAME AMP MINI COMMON TERMINATED (CT) CONNECTOR 1.5 mm PITCH SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS			
		APPLICATION SPEC				
		WEIGHT	SIZE A4	CAGE CODE 00779	DRAWING NO C-292230	RESTRICTED TO
CUSTOMER DRAWING			SCALE NON	SHEET 4	OF 4	REV B1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-292230-7](#)