

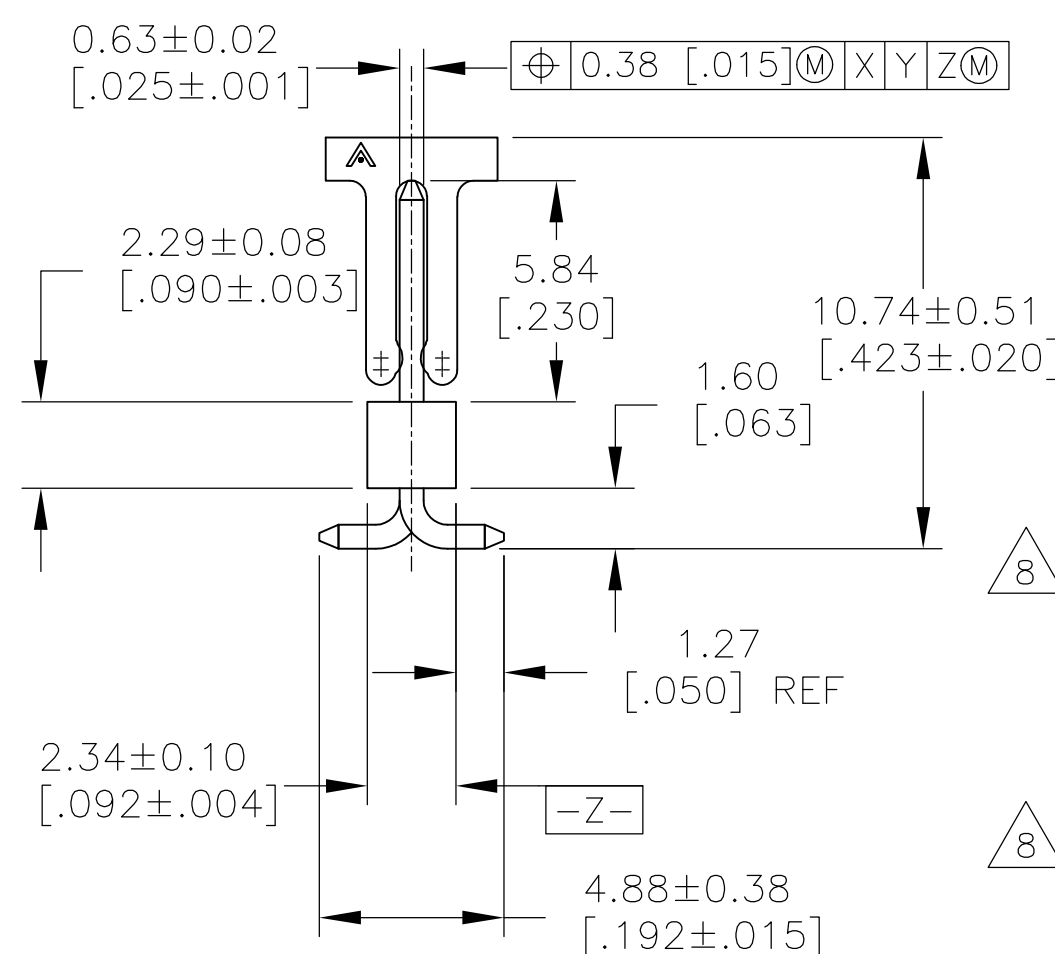
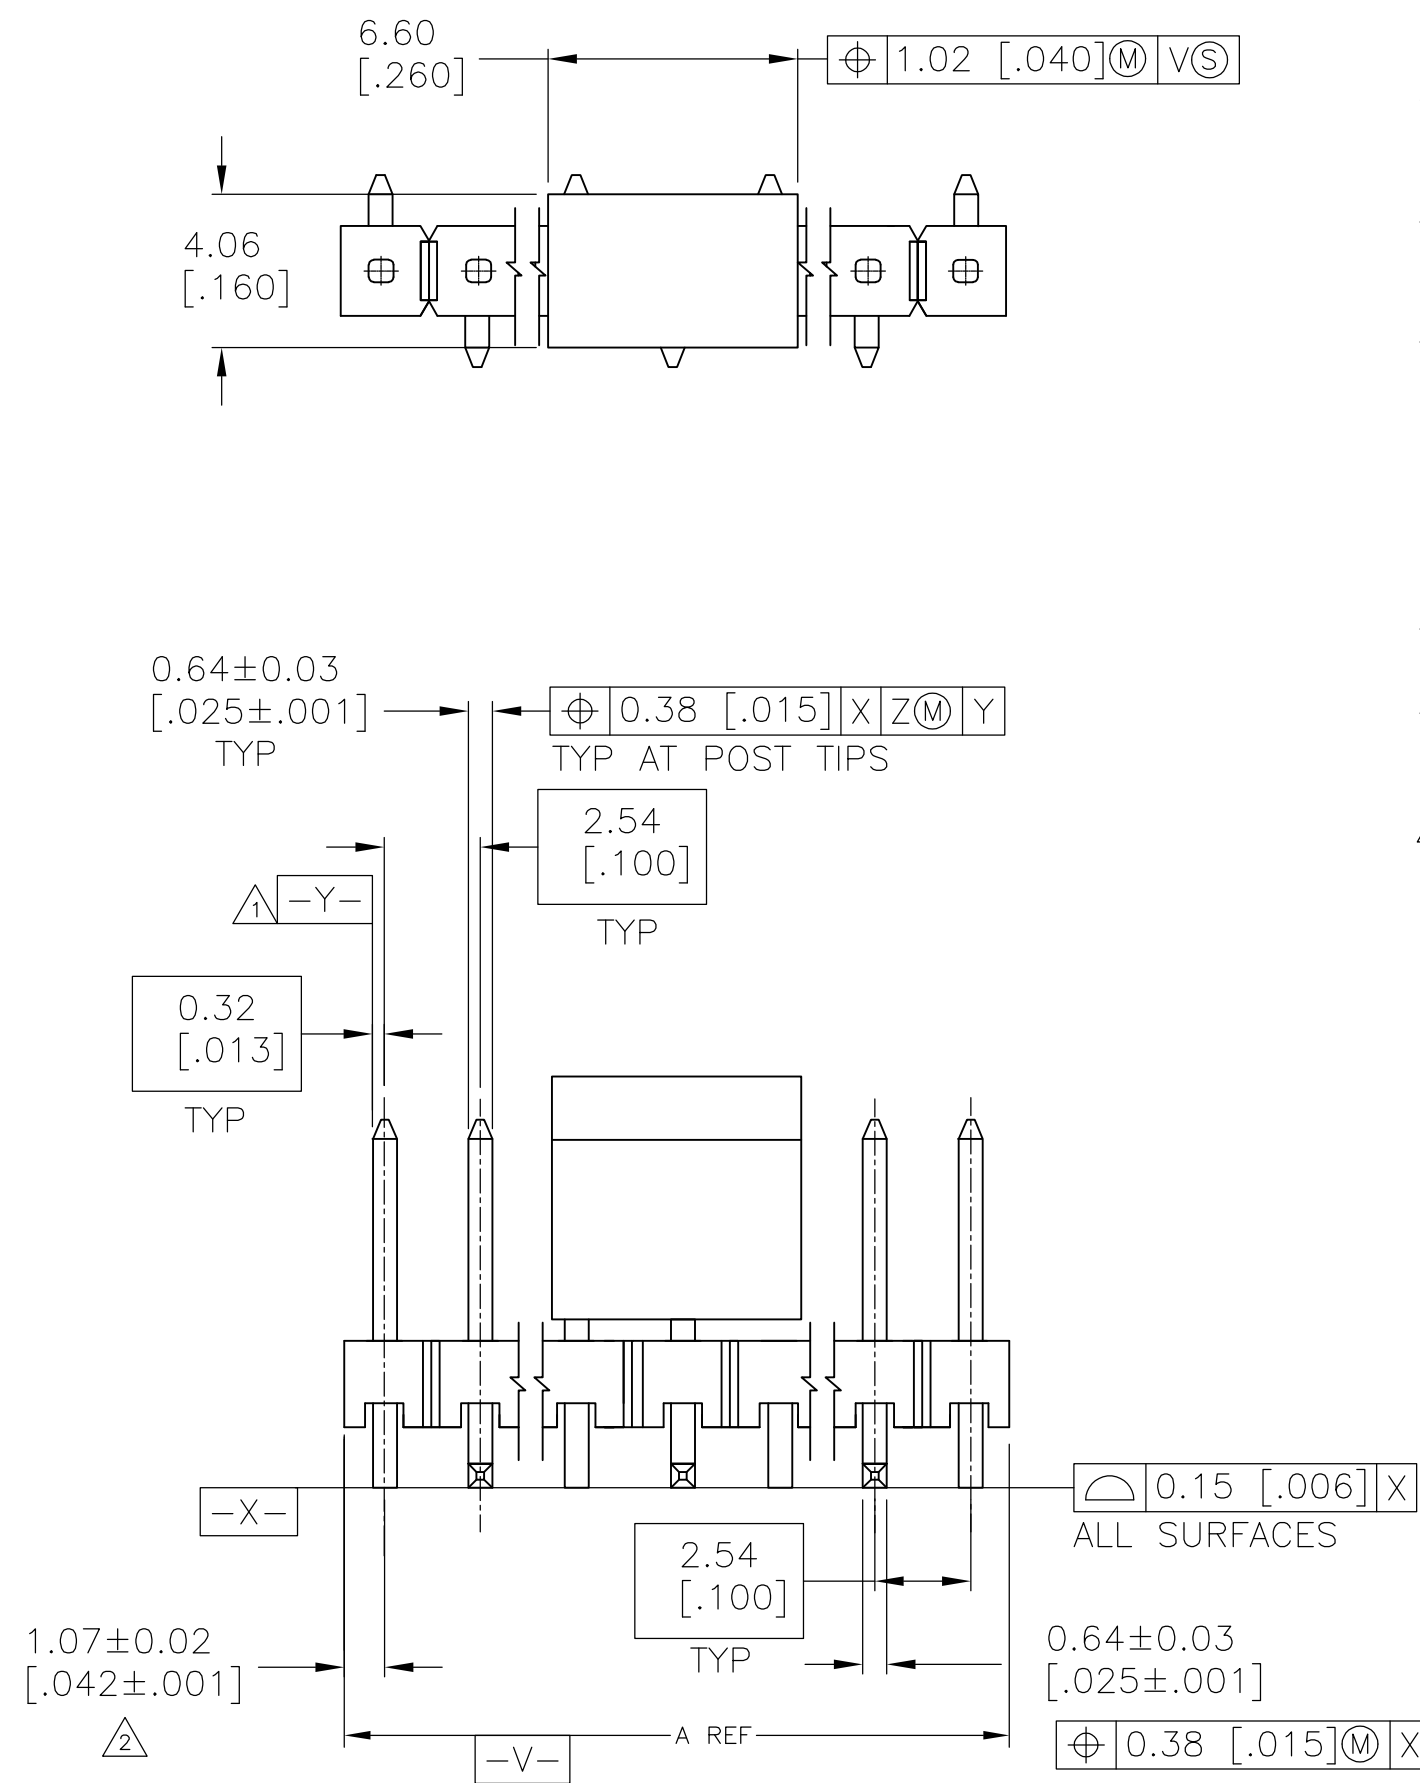


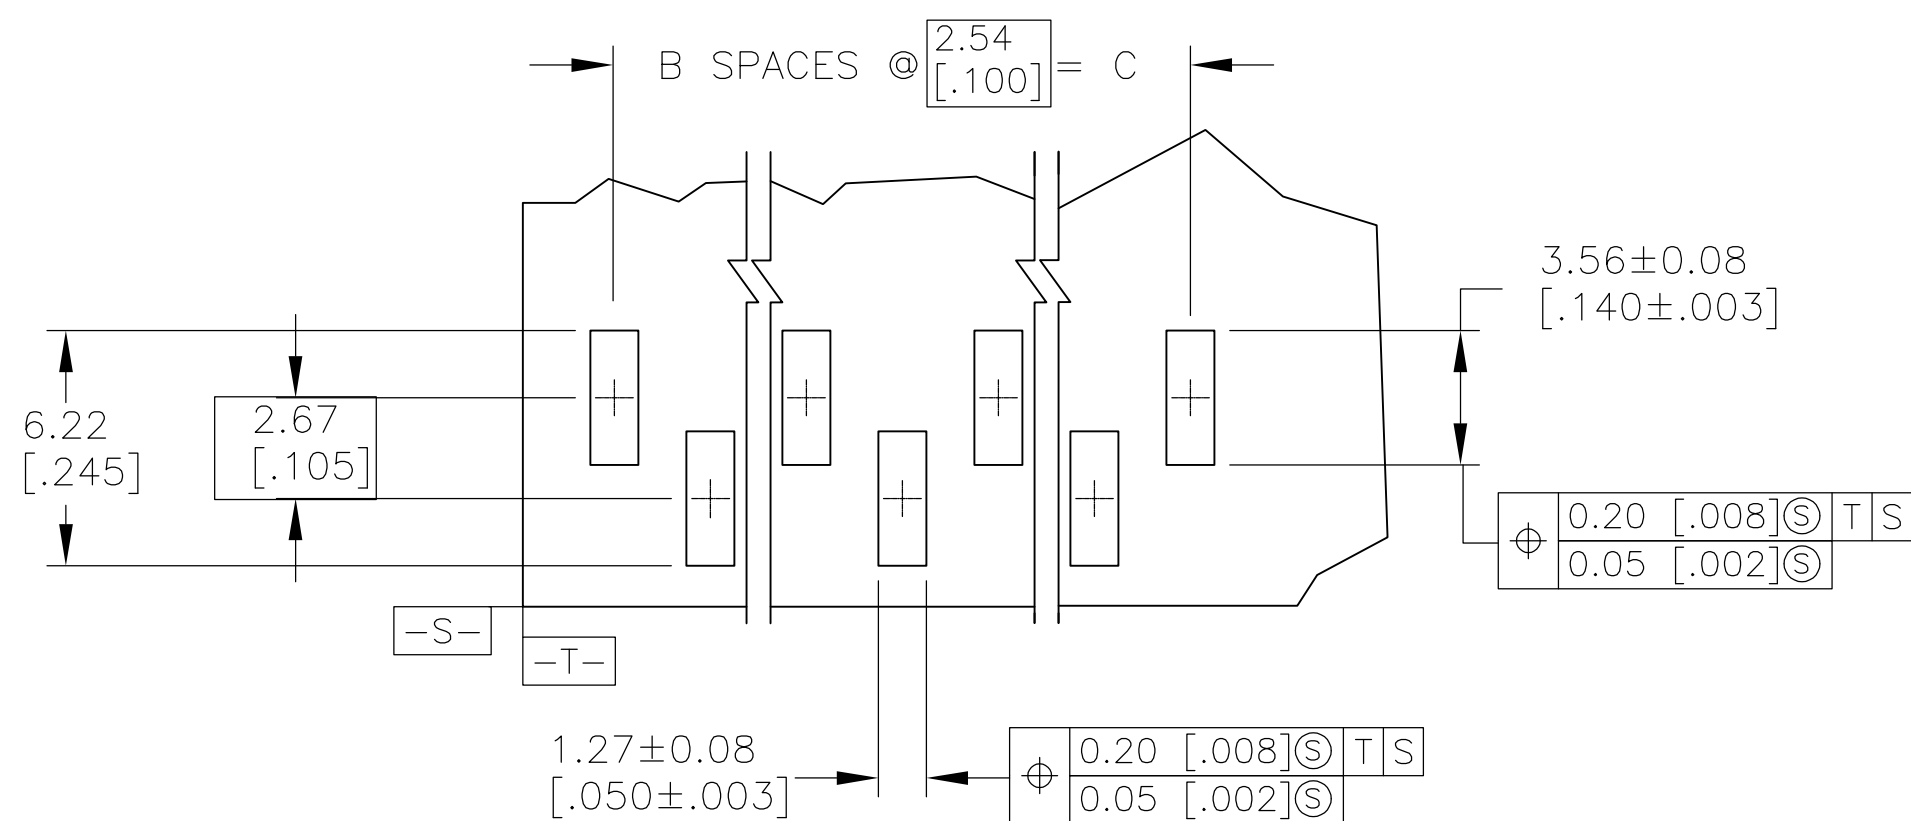

		PRODUCTION						
OVER			56MM	35.56 [1.400]	14	37.69 [1.484]	15	6-147291-3
			56MM	33.02 [1.300]	13	35.15 [1.384]	14	6-147291-2
PER			56MM	30.48 [1.200]	12	32.61 [1.284]	13	6-147291-1
			56MM	25.4 [1.000]	10	27.53 [1.084]	11	6-147291-0
			56MM	22.86 [.900]	9	24.99 [.984]	10	5-147291-9
			32MM	10.16 [.400]	4	12.29 [.484]	5	5-147291-8
0.51			32MM	12.70 [.500]	5	14.83 [.584]	6	5-147291-7
	020]	OBSOLETE		24MM	7.26 [.300]	3	9.75 [.384]	4
				24MM	5.08 [.200]	2	7.21 [.284]	3
	OBSOLETE		56MM	27.94 [1.100]	11	30.07 [1.184]	12	5-147291-4
			44MM	20.32 [.800]	8	22.45 [.884]	9	5-147291-3
			44MM	17.78 [.700]	7	19.91 [.784]	8	5-147291-2
	OBSOLETE		44MM	15.24 [.600]	6	17.37 [.684]	7	5-147291-1
	OBSOLETE		24MM	7.26 [.300]	3	9.75 [.384]	4	147291-6
			24MM	5.08 [.200]	2	7.21 [.284]	3	147291-5
			56MM	27.94 [1.100]	11	30.07 [1.184]	12	147291-4
	OBSOLETE		56MM	22.58 [.900]	9	27.53 [1.084]	10	147291-3
			44MM	17.78 [.700]	7	19.91 [.784]	8	147291-2
	OBSOLETE		44MM	15.24 [.600]	6	17.37 [.684]	7	147291-1
		PLATING	TAPE WIDTH	C	B	A	NO OF POSN	PART NUMBER



RECOMMENDED PCB LAYOUT
FOR USE WITH 0.20[.008] THICK STENCIL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. HAYMAKER 14JUN99 CHK J. GESFORD 14JUN99		 TE Connectivity			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SURFACE MOUNT HEADER ASSEMBLY, MOD II, BREAKAWAY, VERTICAL, SINGLE ROW, .100 X .100 C/L, 025 SQ. POST, WITH PICK AND PLACE CAP			
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 [.005] 4 PLC ± - ANGLES ± -		APVD J. GESFORD 14JUN99 PRODUCT SPEC — APPLICATION SPEC —		SIZE A2	
MATERIAL 		FINISH SEE TABLE		WEIGHT —		CAGE CODE —	
CUSTOMER DRAWING				DRAWING NO C-147291		RESTRICTED TO —	
				SCALE 5:1		SHEET 1 OF 1	
				REV 1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[147291-5](#)