

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	20
© COPYRIGHT 20	BY -	ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	P		REVISED PER ECO-11-004917	12MAR2011	RK	HMR

1 MATERIALS AND FINISH:
HOUSING: HIGH TEMPERATURE POLYAMIDE, UL 94V-0,
COLOR: BLACK.
TERMINAL: COPPER ALLOY, TIN PLATED.
CLAMP: COPPER ALLOY, NICKEL PLATED.
CLAMPING SCREW: COPPER ALLOY, NICKEL PLATED.




2. WIRE SIZE RANGE: 16-28 AWG.

3. CURRENT RATING: 12A, 150V
OPERATING TEMPERATURE: -40° TO +110°C

4. SUITALBLE FOR 2.4mm MAX PC BOARD THICKNESS.

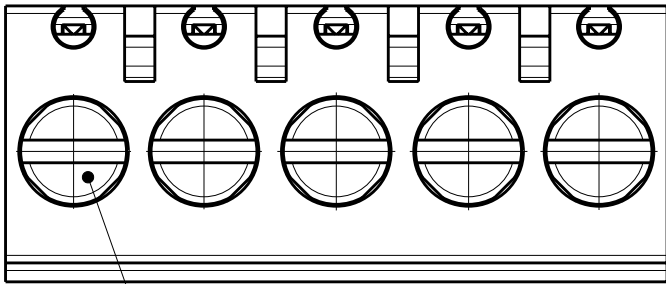

CLAMPING SCREW

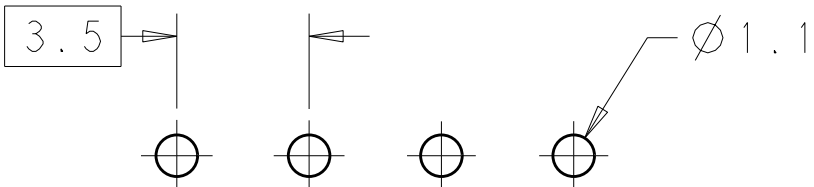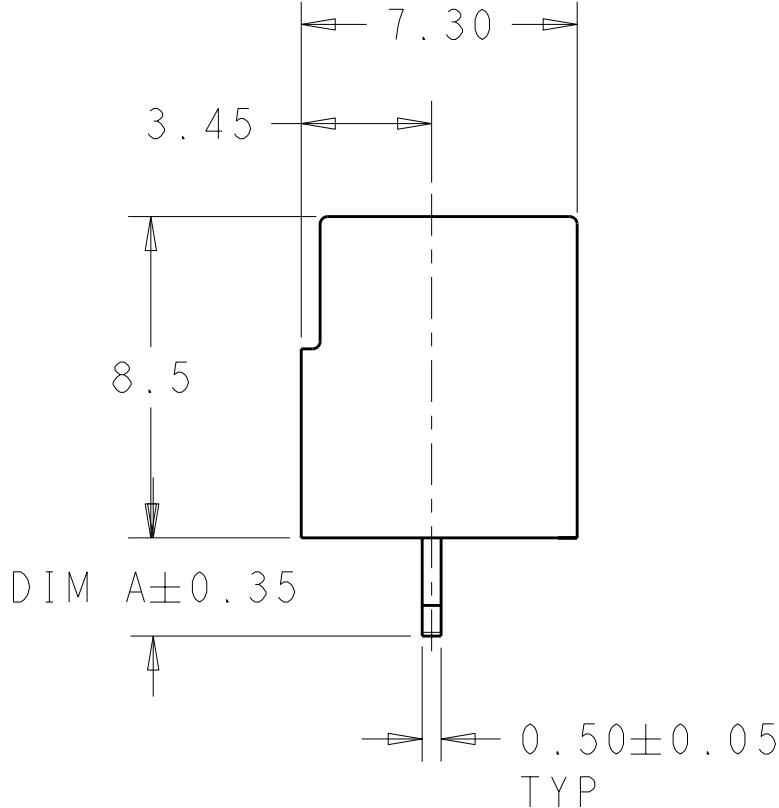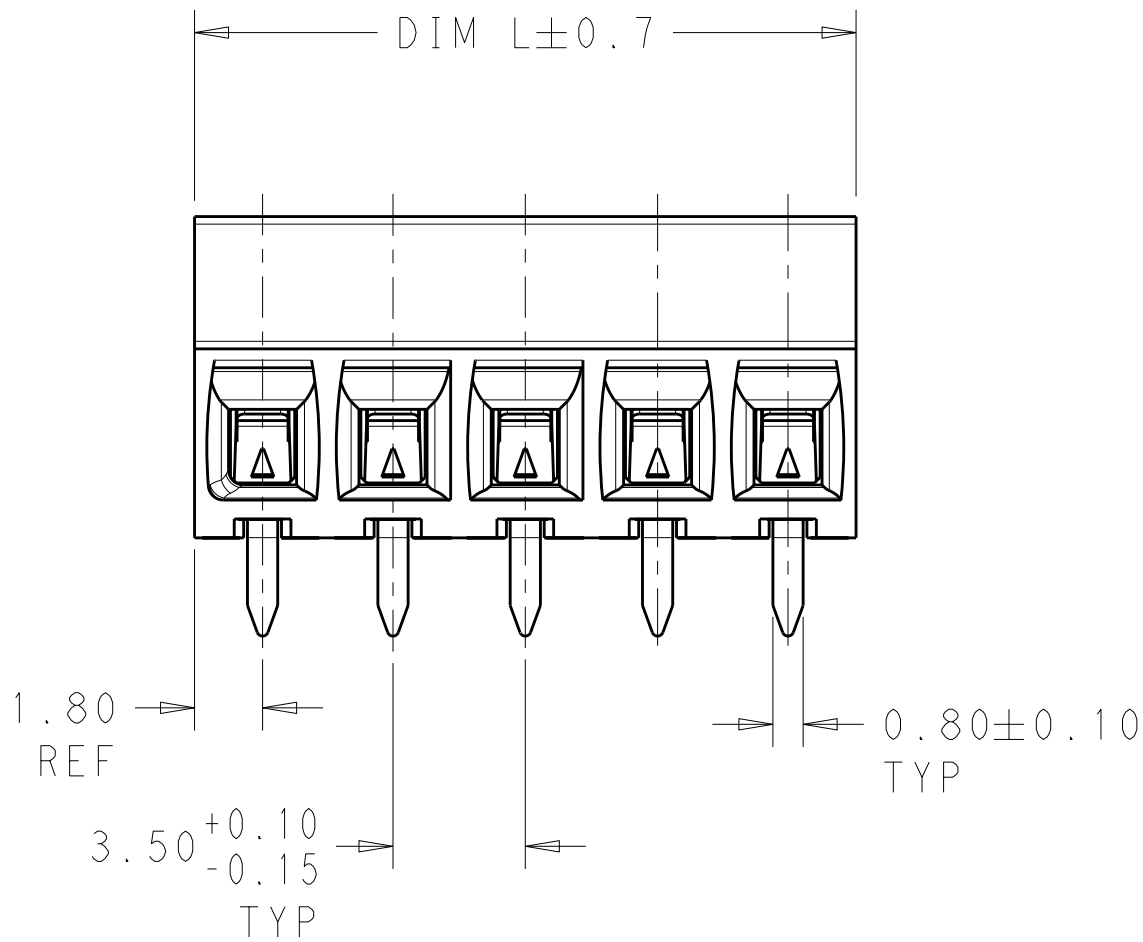

RECOMMENDED PC BOARD LAYOUT

3.50	14.00	4	2-1776112-4
3.50	10.50	3	2-1776112-3
3.50	7.00	2	2-1776112-2
2.60	14.00	4	1776112-4
2.60	10.50	3	1776112-3
2.60	7.00	2	1776112-2
DIM A	DIM L	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. SCHLEGEL CHK C. RICHARD APVD C. RICHARD	19JAN2010 19JAN2010 19JAN2010	STE TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME TERMINAL BLOCK, PCB MOUNT, STRAIGHT, 8.5mm PROFILE, SIDE WIRE ENTRY, 3.5mm PITCH	
0 PLC ± 1 PLC ±0.3 2 PLC ±0.25 3 PLC ± 4 PLC ±		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		SIZE A200779	CAGE CODE C-1776112
MATERIAL 1		FINISH 1		SCALE 5:1	SHEET 1 OF 1
CUSTOMER DRAWING		RESTRICTED TO -		REV P	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1776112-4](#)