
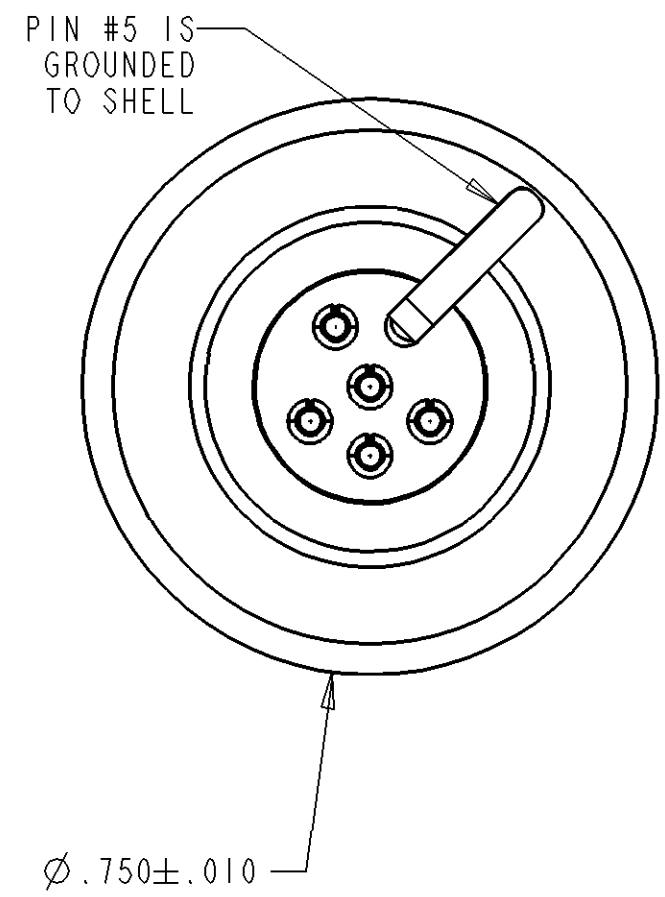
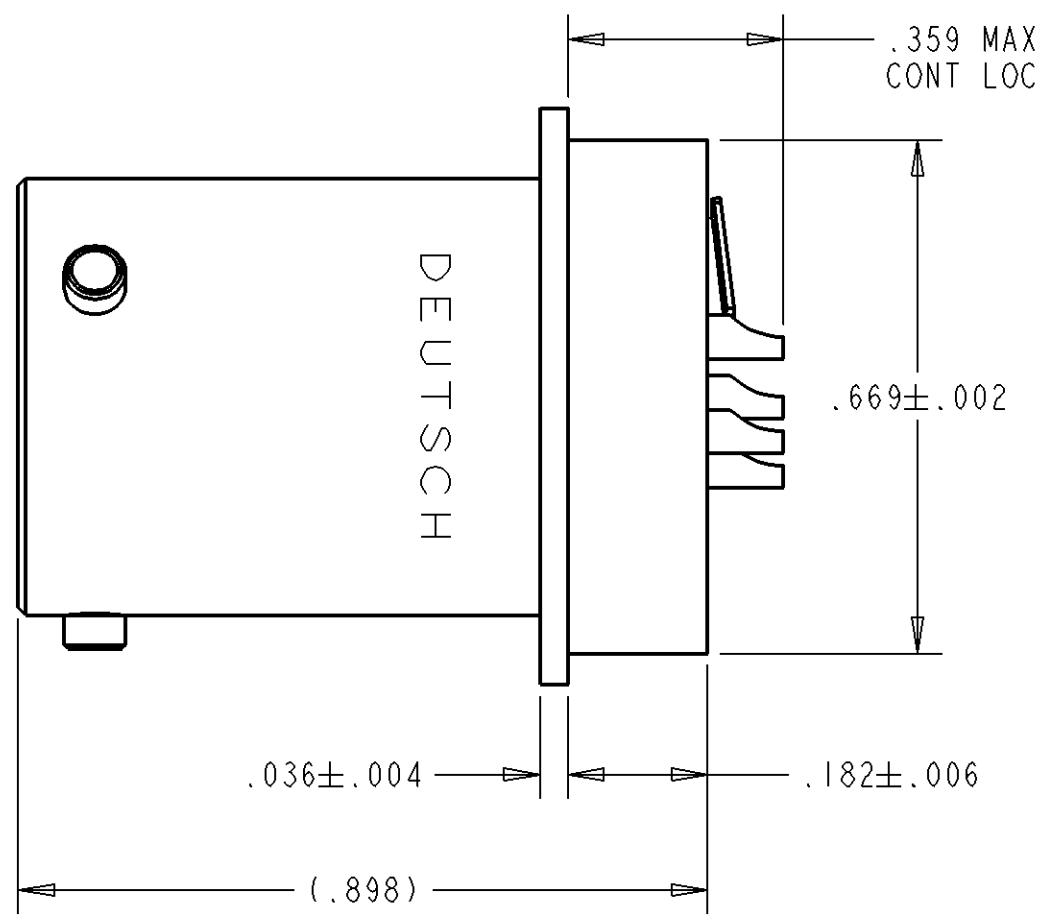


PROPERTY OF DEUTSCH D.A.O.
THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT SHALL NOT BE DISCLOSED, DUPLICATED,
NOR USED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO EVALUATE THIS DRAWING.

N/C 52035-09-35P*

REVISIONS			
REV	DESCRIPTIONS	DATE	APPROVED
N/C	NEW RELEASE PER E.O.H4557	6/19/09	M.A.

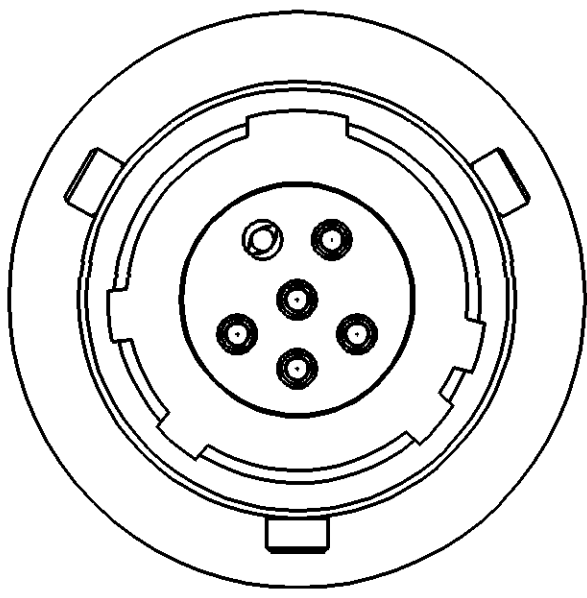

- 1. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
- 2. INSERT ARRANGEMENT PER MIL-STD-1650.
- 3. LEAK RATE: <1E-8 cc/sec He @ 1 atm.
- 4. INSULATION RESISTANCE: >5000 MEGOHM @ 500 VDC
DIELECTRIC WITHSTANDING VOLTAGE: NO BREAKDOWN @ 1200 VAC

- 5. MATERIAL:
SHELL - 304L STAINLESS STEEL
INSULATOR - GLASS INSERT
CONTACT - 52 HIGH NICKEL-IRON ALLOY
INTERFACIAL SEAL - FLUOROSILICONE
- 6. FINISH:
SHELL - PASSIVATION
CONTACT - GOLD OVER NICKEL

NOTE(S):

	SIGNATURE & DATE
DR	S.LUI 6/19/09
CHK	M.ALLEN 6/19/09
PE	
APPD	A.RENGIFO 6/19/09
SCALE:	

RECEPTACLE, CONNETOR

HERMETIC
MS27471 TYPE
09-35 ARR WITH
GROUND PIN

ENVELOPE

FILE: 52035-09-35PX-ENV

NBO	MATL CODE 72
DEUTSCH ENGINEERED INTERCONNECT SOLUTIONS 250 Eddie Jones Way Oceanside, CA 92058	
B DWG SIZE	52035-09-35P*
CAGE CODE 11139	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[52035-09-35PN](#)