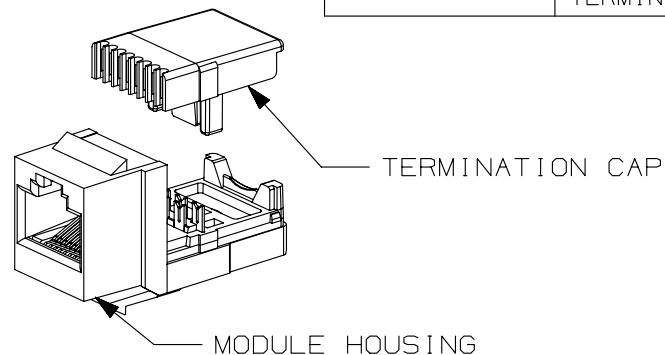





THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	DESCRIPTION	WEIGHT
NK588M**Y	8 POSITION, 8 WIRE CATEGORY 5 UNIVERSAL (A/B) MODULAR JACK. TERMINATION CAP IS COLOR CODED FOR T568 WIRING SCHEMES.	.66 LB/50 PCS [300 g/50 PCS]
NK5E88M**Y	8 POSITION, 8 WIRE CATEGORY 5E UNIVERSAL (A/B) MODULAR JACK. TERMINATION CAP IS COLOR CODED FOR T568 WIRING SCHEMES.	

**NOTES:**

1. SEE CURRENT NETKEY CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. MATERIAL:
MODULE HOUSING: ABS
NOMINAL WALL THICKNESS: .078(2.0)
TERMINATION CAP: POLYCARBONATE.
3. ALL 8 POSITION, 8 WIRE CONNECTOR MODULES WILL ACCEPT THREE OR FOUR PAIR MODULAR PLUGS WITHOUT DAMAGE.
4. DIMENSIONS IN BRACKETS ARE IN METRIC.

PANEL OPENING REQUIREMENTS
PANEL THICKNESS: (.048" - .058")

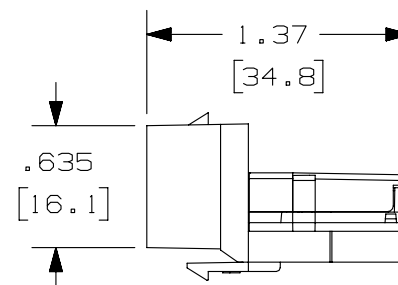

ACTUAL SIZE



REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	5-12-14	MDJR	REFR	JCK	A. UPDATED TITLE BLOCK.	02479-350
R	3-25-06	NER	WJC	RMD	RELEASED TO PRODUCTION	02479-350

PART NUMBER		NK5*****Y	
TITLE		NETKEY TWISTED PAIR CONNECTOR MODULE	
CUSTOMER DRAWING			
ITEM REVISION NAME		M02479NK/01	
DATASET FILE NAME		M02479NK_DC350/00B	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.X ± .XX ± .03 [.8]		SEE NOTE 2	
.XXX ± .010 [.3] ANGLES ±		DRAWING NUMBER:	
THIRD ANGLE PROJECTION		02479-350	
DRAWN BY	DATE	CHK	SCALE
WJC	3-25-06	RMD	FULL
SHT 1 OF 1		A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[NK5E88MBUY](#)