



used for:	D-SUB
-----------	-------

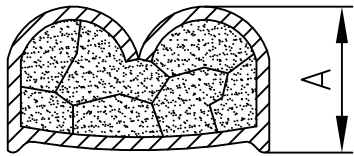


(b)

Wire size AWG	Crimp height A
24	0,68 – 0,86
22	0,68 – 0,86
20	0,68 – 0,86

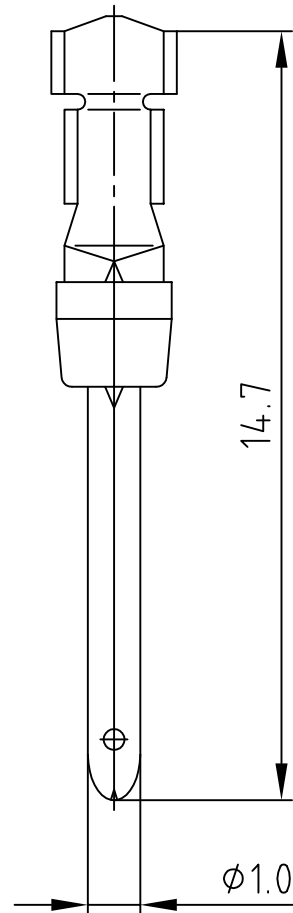

STRIPPING DIMENSIONS (b)

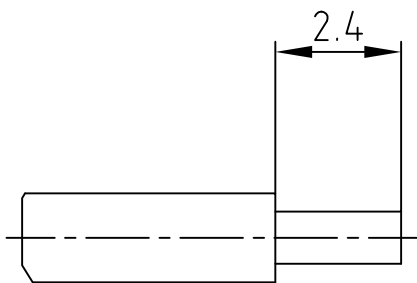



ⓑ NOTES:

Material Stamped Contacts: Phosphor Bronze
Finish: Gold Flash over Nickel in the Contact Area
Temperature Range: -55°C to +125°C
Rated Current: 7.5A
Test Voltage: 1000V eff. at 50Hz
Contact Resistance: $\leq 10\text{m}\Omega$
Insulation Resistance: $\geq 5000\text{M}\Omega$
Crimping: Use Crimp Tool 360X10079X

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		
				2002	date	name
				drawn	11.01.	Parei
				appd.	11.01.	Resonnek
				norm		
				d-old		
3 x b	Ä 4116	27.09.2011	Lehmen.			
a	Original					
rev.	description	date	name			

scale:	5:1
material:	SEE NOTES

title:	PLUG CONTACT CRIMP AWG 24-20
--------	------------------------------------

dwg no:	AutoCAD 2006	DIN-A
16K2A430A		4
		sh: 1/1

part no:	161A13399X
----------	------------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[161A13399X](#)