




1. RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. 1.5mm NOMINAL INSULATION CRIMP HEIGHT.
5. CRIMP DATA QUOTED ON THIS LOG IS AS SPECIFIED BY CUSTOMER AND NOT AS CALCULATED BY AMP.

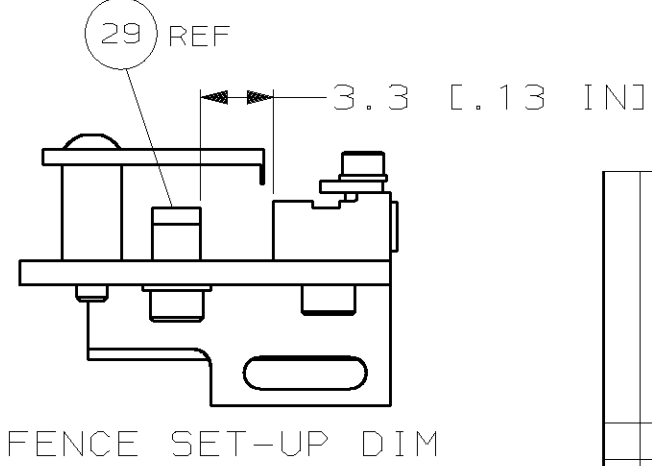

FENCE SET-UP DIM

DIMENSIONS: mm (INCHES)		MATERIAL		HT TR		FIN	
DO NOT SCALE PRINT.		-		-		-	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		195EP00		195EP00		 AMP Incorporated Harrisburg, PA 17105-3608	
1 PLC DEC +0.5 [0.2 IN]		DR M CLIFFORD		APP F BACKHURST			
2 PLC DEC ±		CHK 03-11-00		REL 03-11-00			
3 PLC DEC ±		L. LOPHOUSE		M. CLIFFORD			
ANGLES ±		NAME SIDE FEED HD-1 APPLICATOR					
SURF TEXTURE: ✓		MACHINE REF HD-I APPL					
REMOVE BURRS, BREAK SHARP EDGES R0.38 MAX		SCALE -		DWG NO 1426090		SHEET 1 OF 1	
REV B		RESTRICTED TO -					
CAGE CODE 00779		CUSTOMER AND ASSEMBLY DRAWING					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1426090-2](#)