
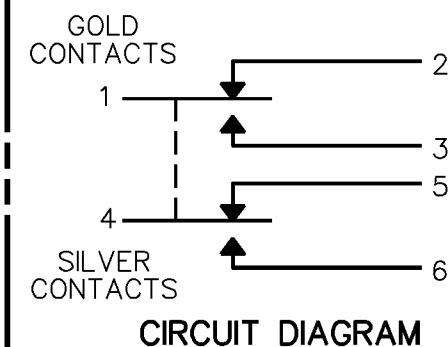
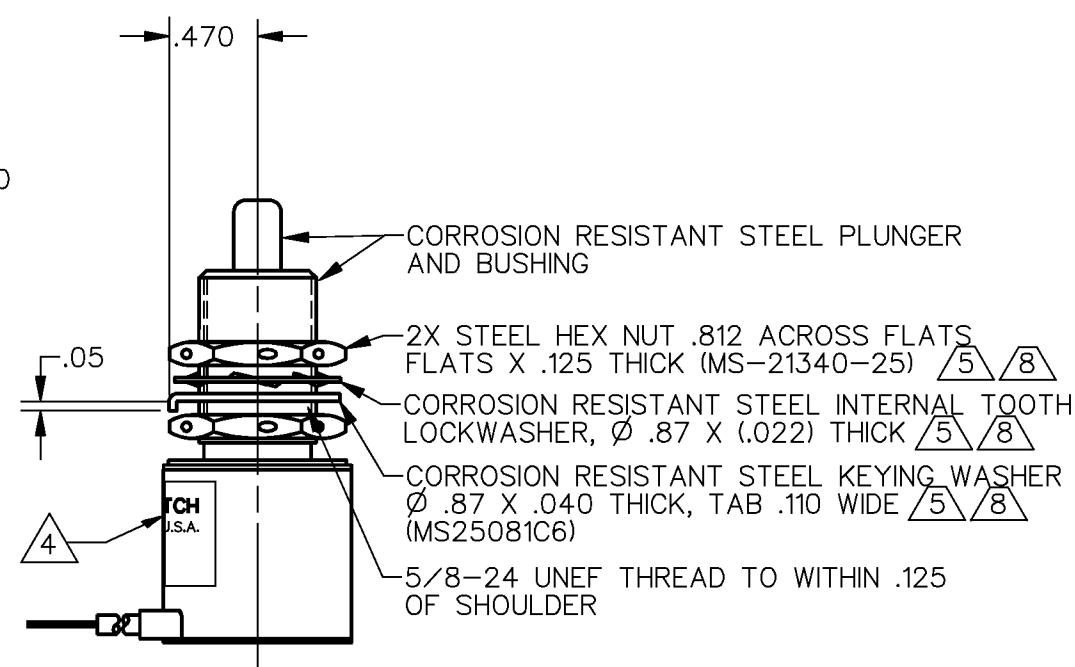


SWITCH – ENCLOSED

CATALOG LISTING
1EN578-6

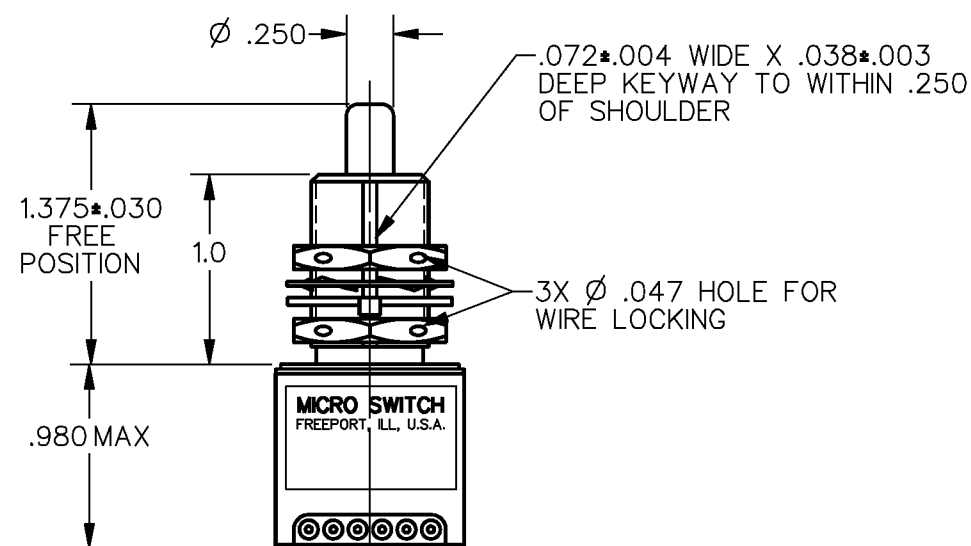


NOTES

- 1 - CORROSION RESISTANT STEEL ENCLOSURE
- 2 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 4
- 3 - COINCIDENCE OF OPERATING AND RELEASING POINTS:
.010 OF PLUNGER TRAVEL
- 4 - CIRCUIT DIAGRAM, CATALOG LISTING, FED. MFG. CODE AND DATE
CODE ARE MARKED ON SIDE OF HOUSING
- 5 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805
- 6 - RATING APPLIES TO CIRCUIT 1-2-3
- 7 - RATING APPLIES TO CIRCUIT 4-5-6
- 8 - REPLACEMENT MOUNTING HARDWARE - PACKET 19PA8
- 9 - PLUNGER SEAL MATERIAL - FLUOROSILICONE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA				
OPERATING FORCE — — — —	3-6 LB	CONTACT ARRANGEMENT 2X S P D T				
FULL OVERTRAVEL FORCE ---	17 LB MAX					
RELEASE FORCE — — — —	2 LB MIN	LOAD	28 VDC			
PRETRAVEL — — — — —	.040 MAX		7 SEA LEVEL	6	7 50,000 FT.	6
DIFFERENTIAL TRAVEL — — —	.020 MAX	RES	4	1	4	1
OVERTRAVEL — — — — —	.250 MIN	IND	2	.5	2	.5
		MOTOR	4			

THIRD ANGLE PROJECTION



SCALE	FULL
-------	------

DO NOT SCALE PRINT

**UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE**

ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT .46 LB MAX

ANSI Y14.5M-1982 APPLIES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[1EN578-6](#)