


**WIRE, ELECTRIC, RADIATION CROSSLINKED EXTRUDED, MODIFIED
ETFE INSULATED, SILVER PLATED COPPER
FOR WRAPPED SOLDERLESS CONNECTIONS**

The complete requirements for procuring the wire described herein shall consist of this document.

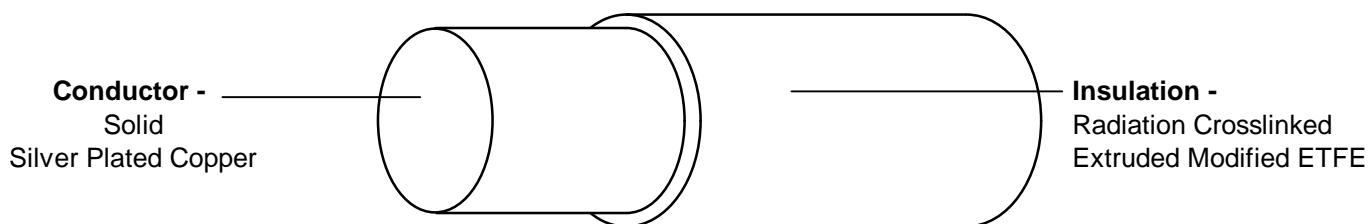

Part Description	Conductor		FINISHED WIRE						
	Wire Size (AWG)	Outside Diameter (mm) Nom.	Resistance @ 20°C (ohms/ km) Max.	Diameter (mm)			Weight (kg/ km) Nom.	Insulation Removal Force (grms)	
				Min.	Nominal	Max.		Min.	Max.
55A9002-30-*	30	0.25	387	0.46	0.50	0.53	0.73	150	500
55A9002-26-*	26	0.40	152	0.64	0.67	0.71	1.63	150	1000
55A9002-24-*	24	0.52	92.8	0.74	0.78	0.81	2.38	150	1000

COLOUR CODE: The '*' in the part number shall be replaced by a standard colour code designator in accordance with Mil Std 681.

PERFORMANCE REQUIREMENTS: To be tested to and meet the requirements of the issue in effect of Raychem specification WSD 1244.

APPROVAL: Electronic sign off - no signatures will appear.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55A9002-30-5](#)