


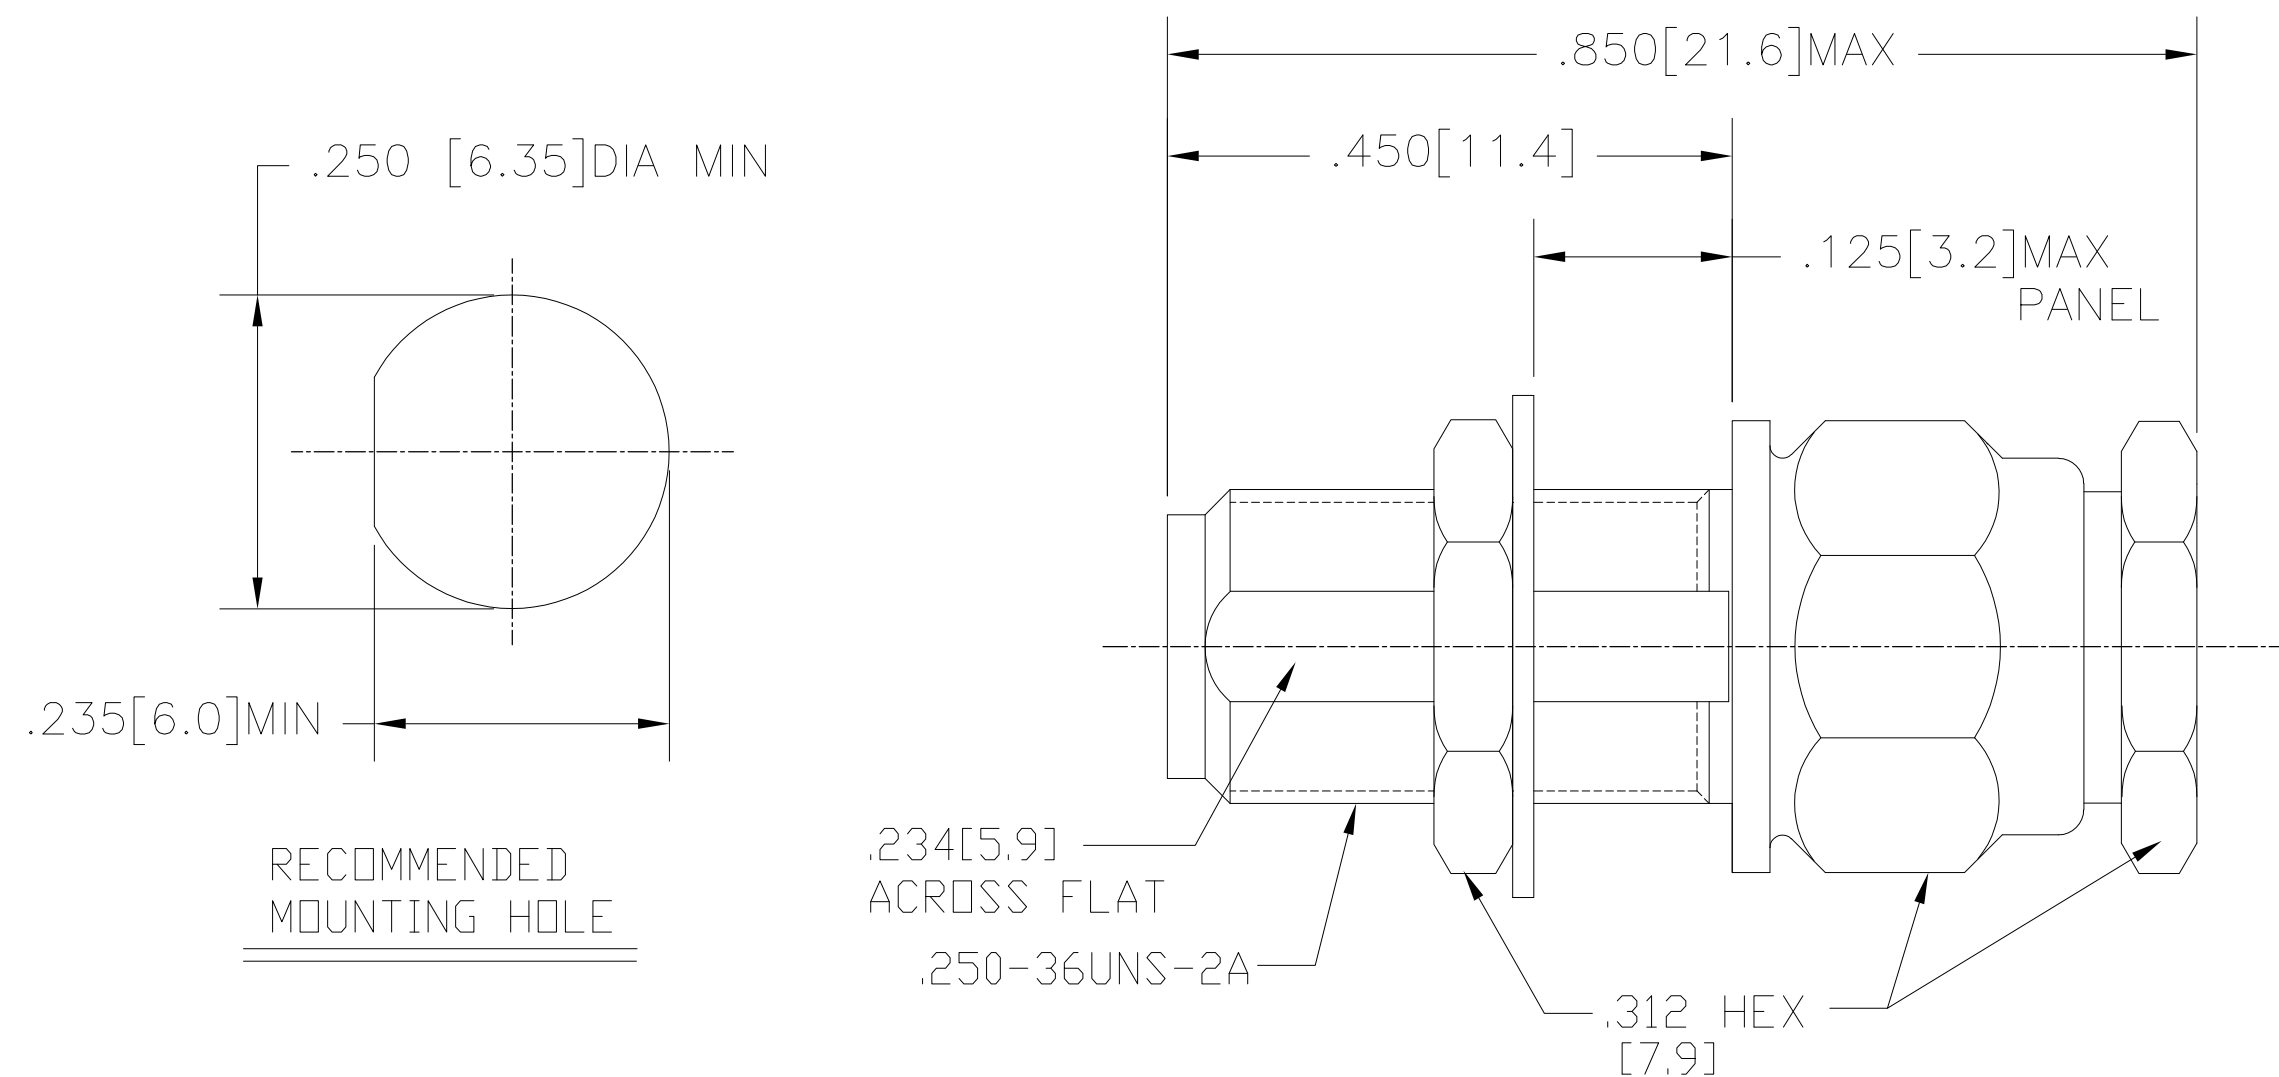

NOTES:

1. CAPTURED CENTER CONTACT
2. DESIGNED FOR USE WITH RG-195/U OR OTHER CABLES
HAVING SIMILAR COMPONENT DIAMETERS

- 1 BRASS
- 2 STAINLESS STEEL
- 3 BERYLLIUM COPPER
- 4 PHOSPHOR BRONZE
- 5 PTFE
- 6 SILICONE RUBBER
- 7 GOLD PLATE
- 8 NICKEL PLATE
- 9 PASSIVATE
- 10 WHITE BRONZE PLATE

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ωhms) 50	Interface Dimensions MIL-STD-348A, Fig. 310.1	TEMPERATURE RATING -40° TO +95° DURABILITY:500 CYCLES
Frequency Range (GHz) DC to 6	Recommended Mating Torque 7-10 In-Lbs	
Volt Rating (VRMS MAX) @ Sea Level 250	Mating Characteristics:	$\frac{.XXX}{XX.X} = \frac{\text{in}}{\text{mm}}$
VSWR 1.18 + .02f(GHz)	Insertion (MAX Lbs) N/A	
Insertion Loss (dB MAX) .07 √f GHz	Withdrawal (MIN Ωz) N/A	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750	Force to Engage and Disengage (In-Lbs MAX) 2	
Contact Resistance (Milliohms MAX) Center Contact 5.0	Center Contact Captivation	
Outer Contact 3.0	Axial (Lbs) 6 Min	
Cable to Housing 0.5	Radial (In-Ωz) N/A	
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 500	Cable Retention	
I.R.(Megohms MIN) 5,000	Axial Force (Lbs) 20 MIN	
	Torque (In-Ωz) N/A	
	Weight (Grams) TBD	

 	 	 		 	 	 	1050999-3
 	 	 		 	 	 	1050999-1
CLAMP NUT	COLLAR	CENTER CONTACT	DIELECTRIC	HOUSING	LOCK WASHER	MOUNTING NUT	TE PN.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN ANSON MA		2Jul09		 Tyco Electronics Corporation Kunshan,Jiangsu,RPC 215312	
		CHK RITA ZUO		2Jul09			
DIMENSIONS: INCHES[MM]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD BOB ZHAO		NAME	
		0 PLC ± -		PRODUCT SPEC		OSM STRAIGHT CABLE(RG-195/U) JACK CLAMP ATTACHMENT -	
		1 PLC ± -		-			
		2 PLC ± .008		APPLICATION SPEC			
		3 PLC ± .005		408-4938			
4 PLC ± -		ANGLES ± 1°		WEIGHT -		RESTRICTED TO	
MATERIAL -		FINISH -		SIZE A2		CAGE CODE 00779	
				DRAWING NO C-1050999		REV B	
				CUSTOMER DRAWING		SCALE 5:1	
						SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2004-7195-00](#)