

Patch panels - VS-PP-R-8XRJ45/5-SC - 1656411


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Patch panel, RJ45, DIN rail mounting, IP20, 8 slots, screw connection, CAT5e, option of shielding via jumpers

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 029834
GTIN	4046356029834

Technical data

Mechanical characteristics

Number of positions	8
Number of slots	8
Insertion/withdrawal cycles	≥ 200
Connection method	Screw connection
Conductor cross section	0.14 mm² ... 0.5 mm²
Connection cross section AWG	26 ... 20
External cable diameter	5 mm ... 8.5 mm
Color	green
Mounting type	DIN rail mounting
Degree of protection	IP20
No. of cable outlets	8

Ambient conditions

Ambient temperature (operation)	0 °C ... 70 °C
---------------------------------	----------------

Material data

Flammability rating according to UL 94	V0
Housing material	PC
Contact carrier material	PBT

Patch panels - VS-PP-R-8XRJ45/5-SC - 1656411

Technical data

Material data

Contact material	Copper alloy
Contact surface material	Gold over nickel
Height	52 mm

Electrical characteristics


Number of positions	8
Transmission characteristics (category)	CAT5 (IEC 11801:2002)
Rated current	1 A
Rated voltage (III/3)	60 V

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Drawings

Dimensional drawing

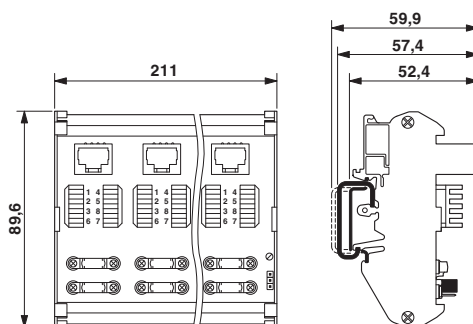

Patch panel with eight RJ45 connections

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

1656411