NOTES:

REFERENCE STANDARD | EC60|69-|| (4.1/9.5) | EC60|69-|6 (N)

I. ELECTRICAL PERFORMANCE -

50 Ω NOMINAL IMPEDANCE FREQUENCY RANGE DC-3.0 GHz VSWR I.065 MAX

-160 dBc MAX.(1800 MHz) PIM

INSERTION LOSS 0.05 dB MAX. INSULATION RESISTANCE 5000 M Ω MIN. PROOF VOLTAGE 2500 VRMS

: OUTER CONDUCTOR 0.4 m Ω MAX. (N), 0.5 m Ω (4.1/9.5) INNER CONDUCTOR 0.8 m Ω MAX. (N), 1.0 m Ω (4.1/9.5) CONDUCTOR RESISTANCE

II. MECHANICAL PERFORMANCE -

RETENTION : 0.56N MIN.(N), 4.0N MIN.(4.1/9.5)

MATING CYCLES : 500 MIN.

III. MATERIAL AND PLATING-

INNER CONDUCTOR : SPRING BRONZE ALLOY, PLATING = Ag (5μm MIN.)

BRASS, PLATING = Ag (5µm MIN.) BRASS, PLATING = NI (5µm) OUTER CONDUCTOR

: IEC 60068-2-27

NUT

INSULATOR : PTFE


IV. ENVIRONMENTAL -

-40°C TO +85°C TEMP. RANGE WEATHER STANDARD : IEC 60068 40/ 85/ 21 THERMAL SHOCK : IEC 60068-2-14-NA VIBRATION : IEC 60068-2-6-FC

V. ROHS COMPLIANT

2 PLACE DECIMAL

SHOCK

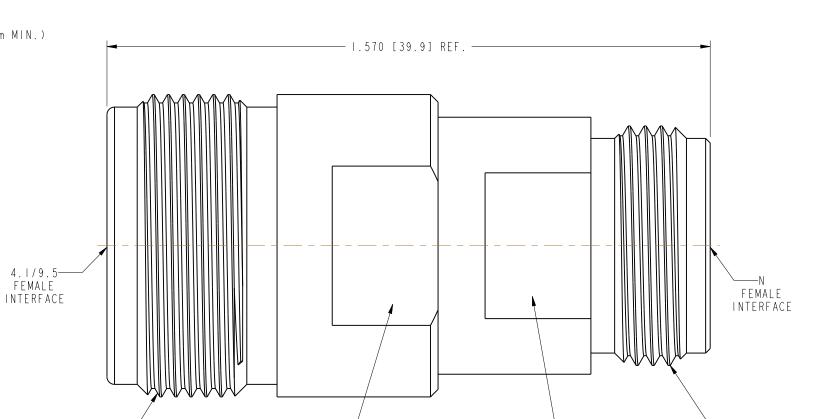

242280

DRAWING NO.

THIRD ANGLE PROJ.

REV

 \oplus

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

-5/8-24UNEF-2A

THREAD

REVISIONS

DATE

11-Sep-13

ECO

SCALE 1.000

APPR

AAP/BG

DESCRIPTION

RELEASE TO MFG

3 PLACE DECIMAL ANGLES $\pm .015$ (0,381 mm) $\pm .005$ (0,127 mm) NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

SEE NOTES REFERENCE

M20x1-

MATERIAL

0.669 ON FLATS-

[17.0]

DRAWN DATE A ARUN PRABU 05-Sep-13 ENGINEER DATE A ARUN PRABU 05-Sep-13 APPROVED DATE B.C. GLEISSNER 11-Sep-13 CAD FILE

4.1/9.5 FEMALE TO N FEMALE ADAPTER

-0.551 ON FLATS

[| 4.0]

Amphenol Connex

Α

SCALE: 4.0:1 SHEET 1 OF 1 REV

DWG SIZE DRAWING NO. 242280

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: 242280