

THIS DRAWING IS UNPUBLISHED





RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED


© COPYRIGHT

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APV
	K4	New 24 pos part number 6-102699-1 added	01AUG2016	KJK	PS

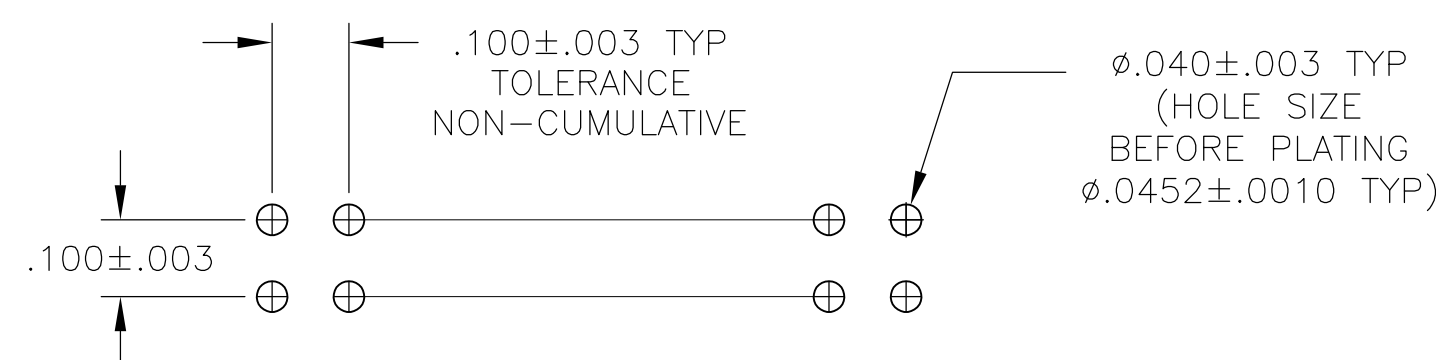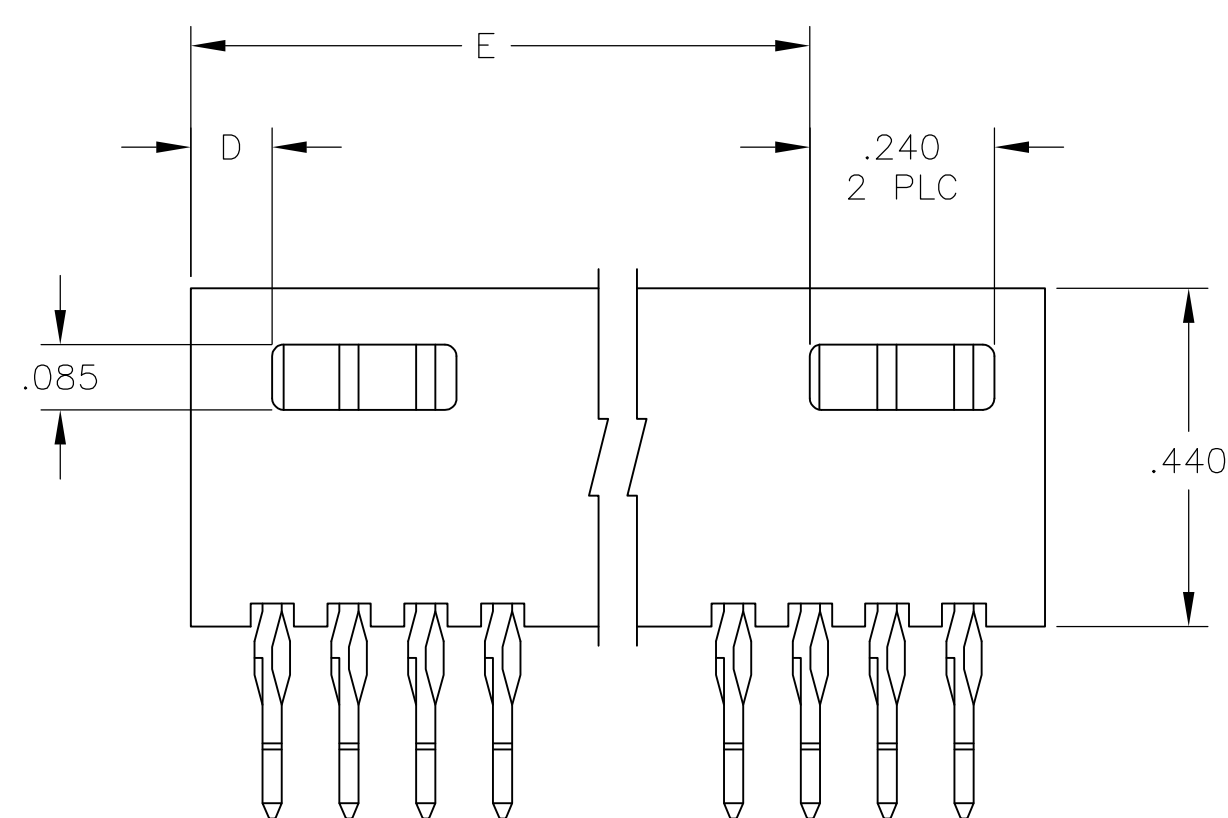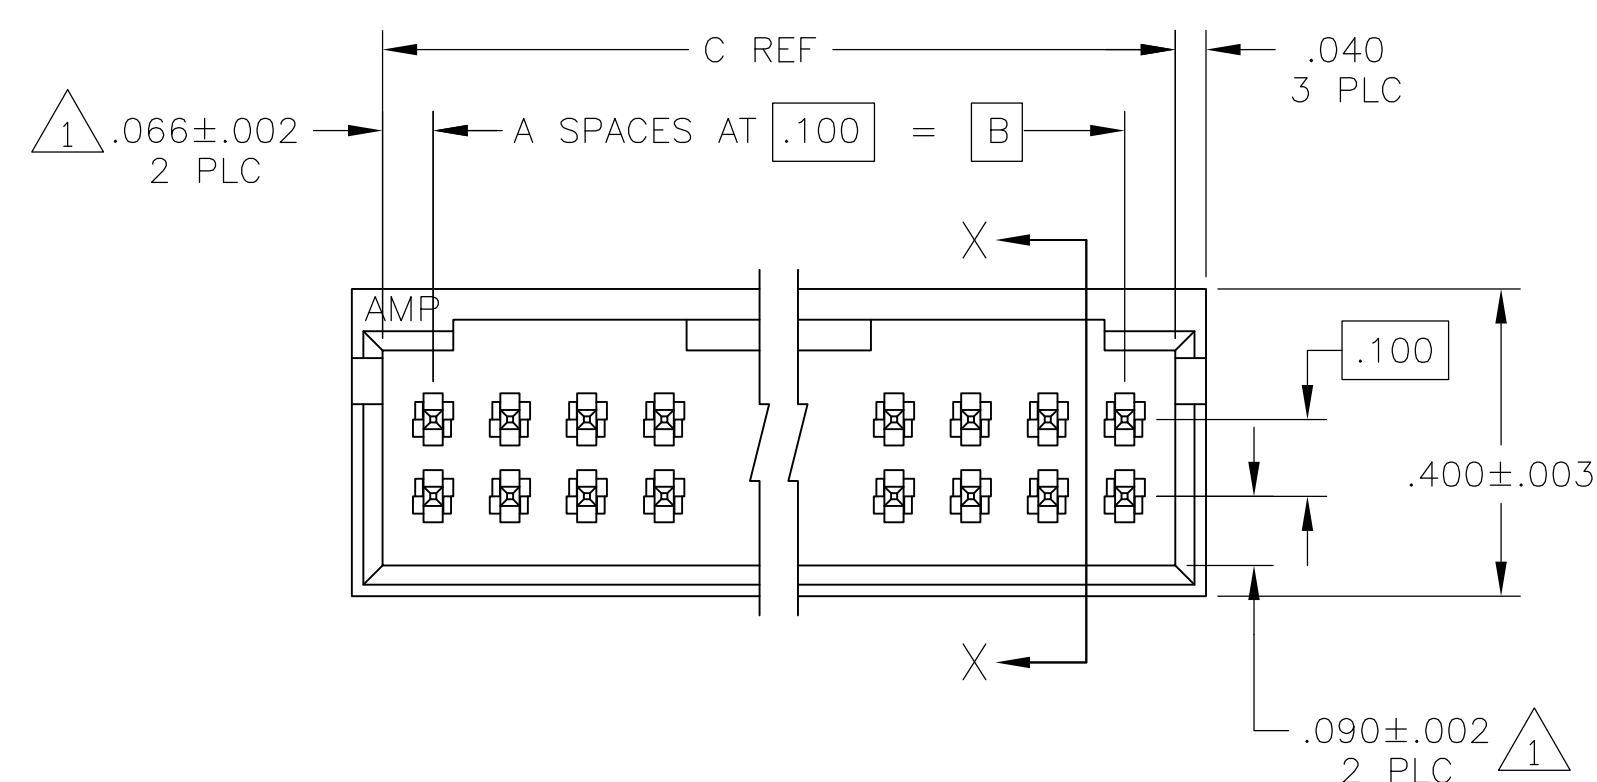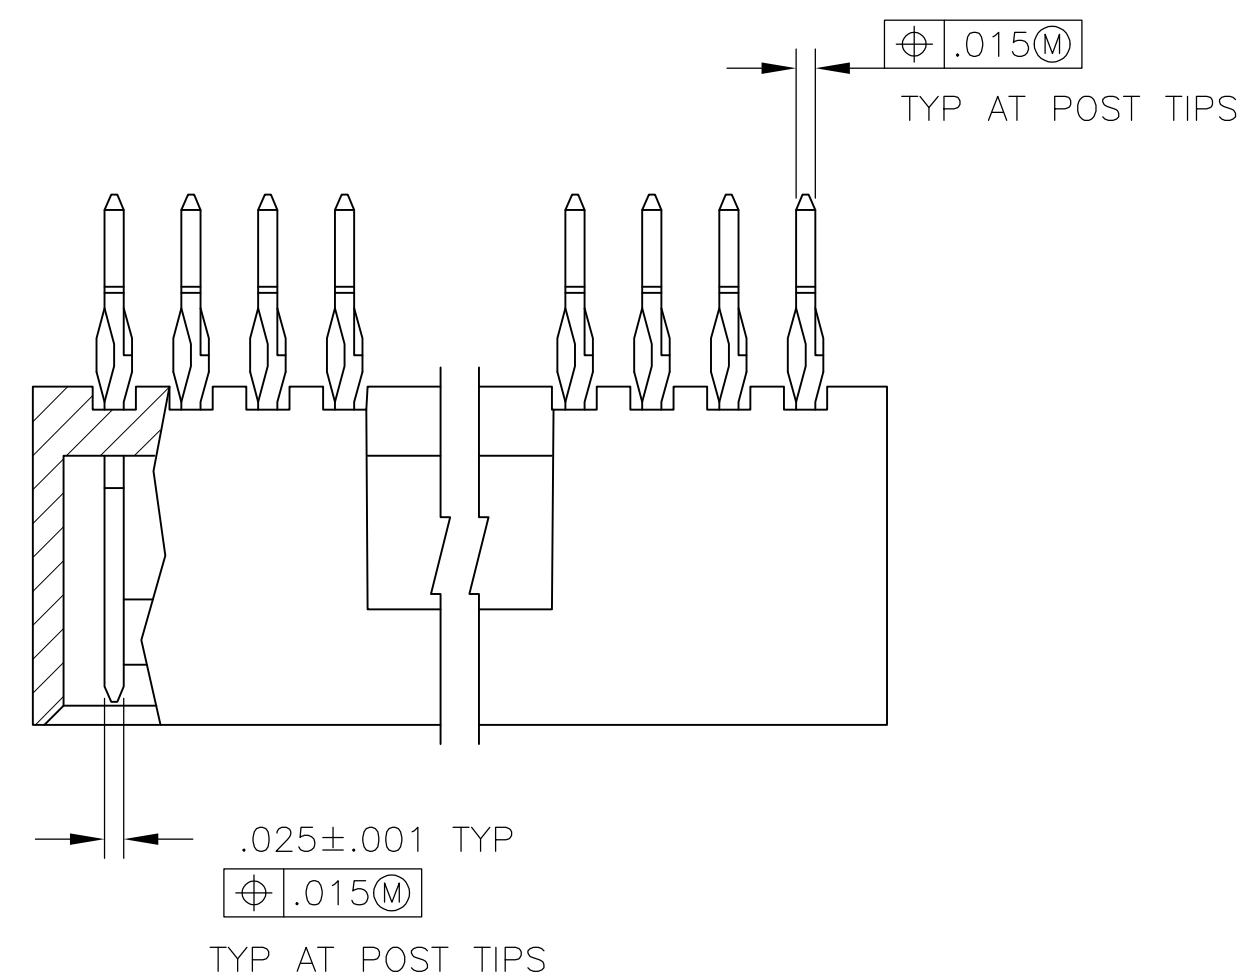

RECOMMENDED HOLE LAYOUT

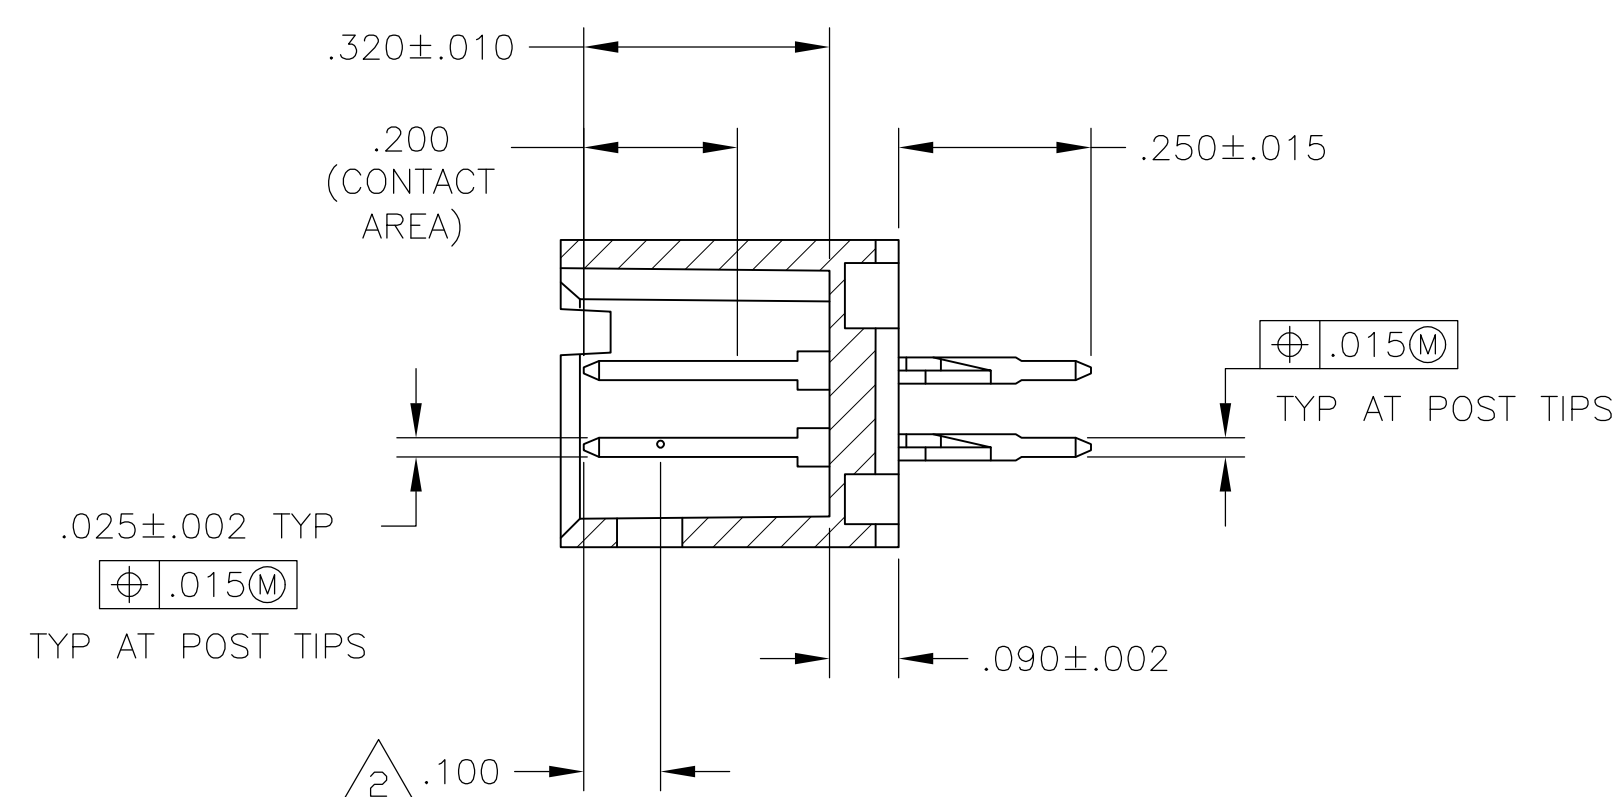

SECTION X-X

6	OBSOLETE	△	2.806	.106	3.032	2.900	29	60	7=102699-8	
		△	2.306	.106	2.532	2.400	24	50	7=102699-3	
		△	1.806	.106	2.032	1.900	19	40	6=102699-9	
		△	1.506	.106	1.732	1.600	16	34	6=102699-6	
		△	1.306	.106	1.532	1.400	14	30	6=102699-4	
		△	1.106	.106	1.332	1.200	12	26	6=102699-2	
		△	1.006	.106	1.232	1.100	10	24	6=102699-1	
		△	.806	.106	1.032	.900	9	20	5=102699-9	
		△	—	.406	.932	.800	8	18	5=102699-8	
		△	—	.306	.832	.700	7	16	5=102699-7	
		△	—	.306	.732	.600	6	14	5=102699-6	
		△	—	.206	.632	.500	5	12	5=102699-5	
		△	—	.206	.532	.400	4	10	5=102699-4	
		△	—	.106	.432	.300	3	8	5=102699-3	
		△	—	.106	.332	.200	2	6	5=102699-2	
6	OBSOLETE	△	2.806	.106	3.032	2.900	29	60	2=102699-8	
	OBSOLETE	△	2.706	.106	2.932	2.800	28	58	2=102699-7	
	OBSOLETE	△	2.606	.106	2.832	2.700	27	56	2=102699-6	
	OBSOLETE	△	2.506	.106	2.732	2.600	26	54	2=102699-5	
	OBSOLETE	△	2.406	.106	2.632	2.500	25	52	2=102699-4	
		△	2.306	.106	2.532	2.400	24	50	2=102699-3	
	OBSOLETE	△	2.206	.106	2.432	2.300	23	48	2=102699-2	
	OBSOLETE	△	2.106	.106	2.332	2.200	22	46	2=102699-1	
	OBSOLETE	△	1.906	.106	2.132	2.000	20	42	2=102699-0	
		△	1.806	.106	2.032	1.900	19	40	1=102699-9	
	OBSOLETE	△	1.706	.106	1.932	1.800	18	38	1=102699-8	
	OBSOLETE	△	1.606	.106	1.832	1.700	17	36	1=102699-7	
	6	SUP BY 6=102699-6	△	1.506	.106	1.732	1.600	16	34	1=102699-6
		OBSOLETE	△	1.406	.106	1.632	1.500	15	32	1=102699-5
			△	1.306	.106	1.532	1.400	14	30	1=102699-4
OBSOLETE		△	1.206	.106	1.432	1.300	13	28	1=102699-3	
		△	1.106	.106	1.332	1.200	12	26	1=102699-2	
OBSOLETE		△	1.006	.106	1.232	1.100	11	24	1=102699-1	
OBSOLETE		△	.906	.106	1.132	1.000	10	22	1=102699-0	
		△	.806	.106	1.032	.900	9	20	102699-9	
		△	—	.406	.932	.800	8	18	102699-8	
		△	—	.306	.832	.700	7	16	102699-7	
		△	—	.306	.732	.600	6	14	102699-6	
		△	—	.206	.632	.500	5	12	102699-5	
		△	—	.206	.532	.400	4	10	102699-4	
		△	—	.106	.432	.300	3	8	102699-3	
		△	—	.106	.332	.200	2	6	102699-2	
	OBSOLETE	△	2.006	.106	2.232	2.100	21	44	102699-1	
		FINISH	E	D	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN R BROWN		14APR05						TE Connectivity			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		R BROWN		14APR05									
INCHES				APRD G ESFORD		14APR05		NAME		HDR ASSY, MOD II, COMPLIANT PIN, DBL ROW, .100x.100 CL, 4 SIDE SHROUD					
		0 PLC ± -		PRODUCT SPEC				SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
		1 PLC ± -		APPLICATION SPEC				A1		00779		C=102699		-	
		2 PLC ± -						SCALE		4:1		SHEET 1 OF 1		REV K4	
		3 PLC ± .005													
		4 PLCS ± -													
MATERIAL		-		FINISH		SEE TABLE									
				WEIGHT											
				CUSTOMER DRAWING											

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[102699-8](#)