

REVISIONS					
P	LTR	DESCRIPTION		DATE	DWN APVD
AV3	REVISED	PER	ECR-16-009296	28JUN2016	BW RS

- 1

BRASS PER QQ-B-626.
- 2

BERYLLIUM COPPER PER ASTM-B-196
- 3

NYLON PER ASTM-D-4066, BLACK
- 4

POLYMETHYLPENTENE GENERAL PURPOSE, NATURAL
- 5

0.00076[.000030] MINIMUM GOLD PER MIL-C-45204.
- 6

0.00254[.000100] MINIMUM GOLD PER MIL-C-45204.
- 7

SHIELDED CABLE #26=NAS-702 CLASS A & C, AND MIL-W-16878 TYPES E & EE, SHIELDED CABLE #24=NAS-702 CLASS A & C, AND MIL-W-16878 TYPES E & EE, SHIELDED CABLE #22=NAS-702 CLASS C, AND MIL-W-16878 TYPE E, AND MIL-C-7078A TYPE I NUMBER 1 DIELECTRIC .068 O.D.
- 8

RG-174/U, RG-179A/U, RG-187/U, AND 21-598.
- 9

SHIELDED CABLE #26=NAS-702 CLASS A, AND MIL-C-7078A TYPE II.


1 O. SEE IS 408-1770

- 11

NYLON PER ASTM-D-4066, NATURAL

- 12

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

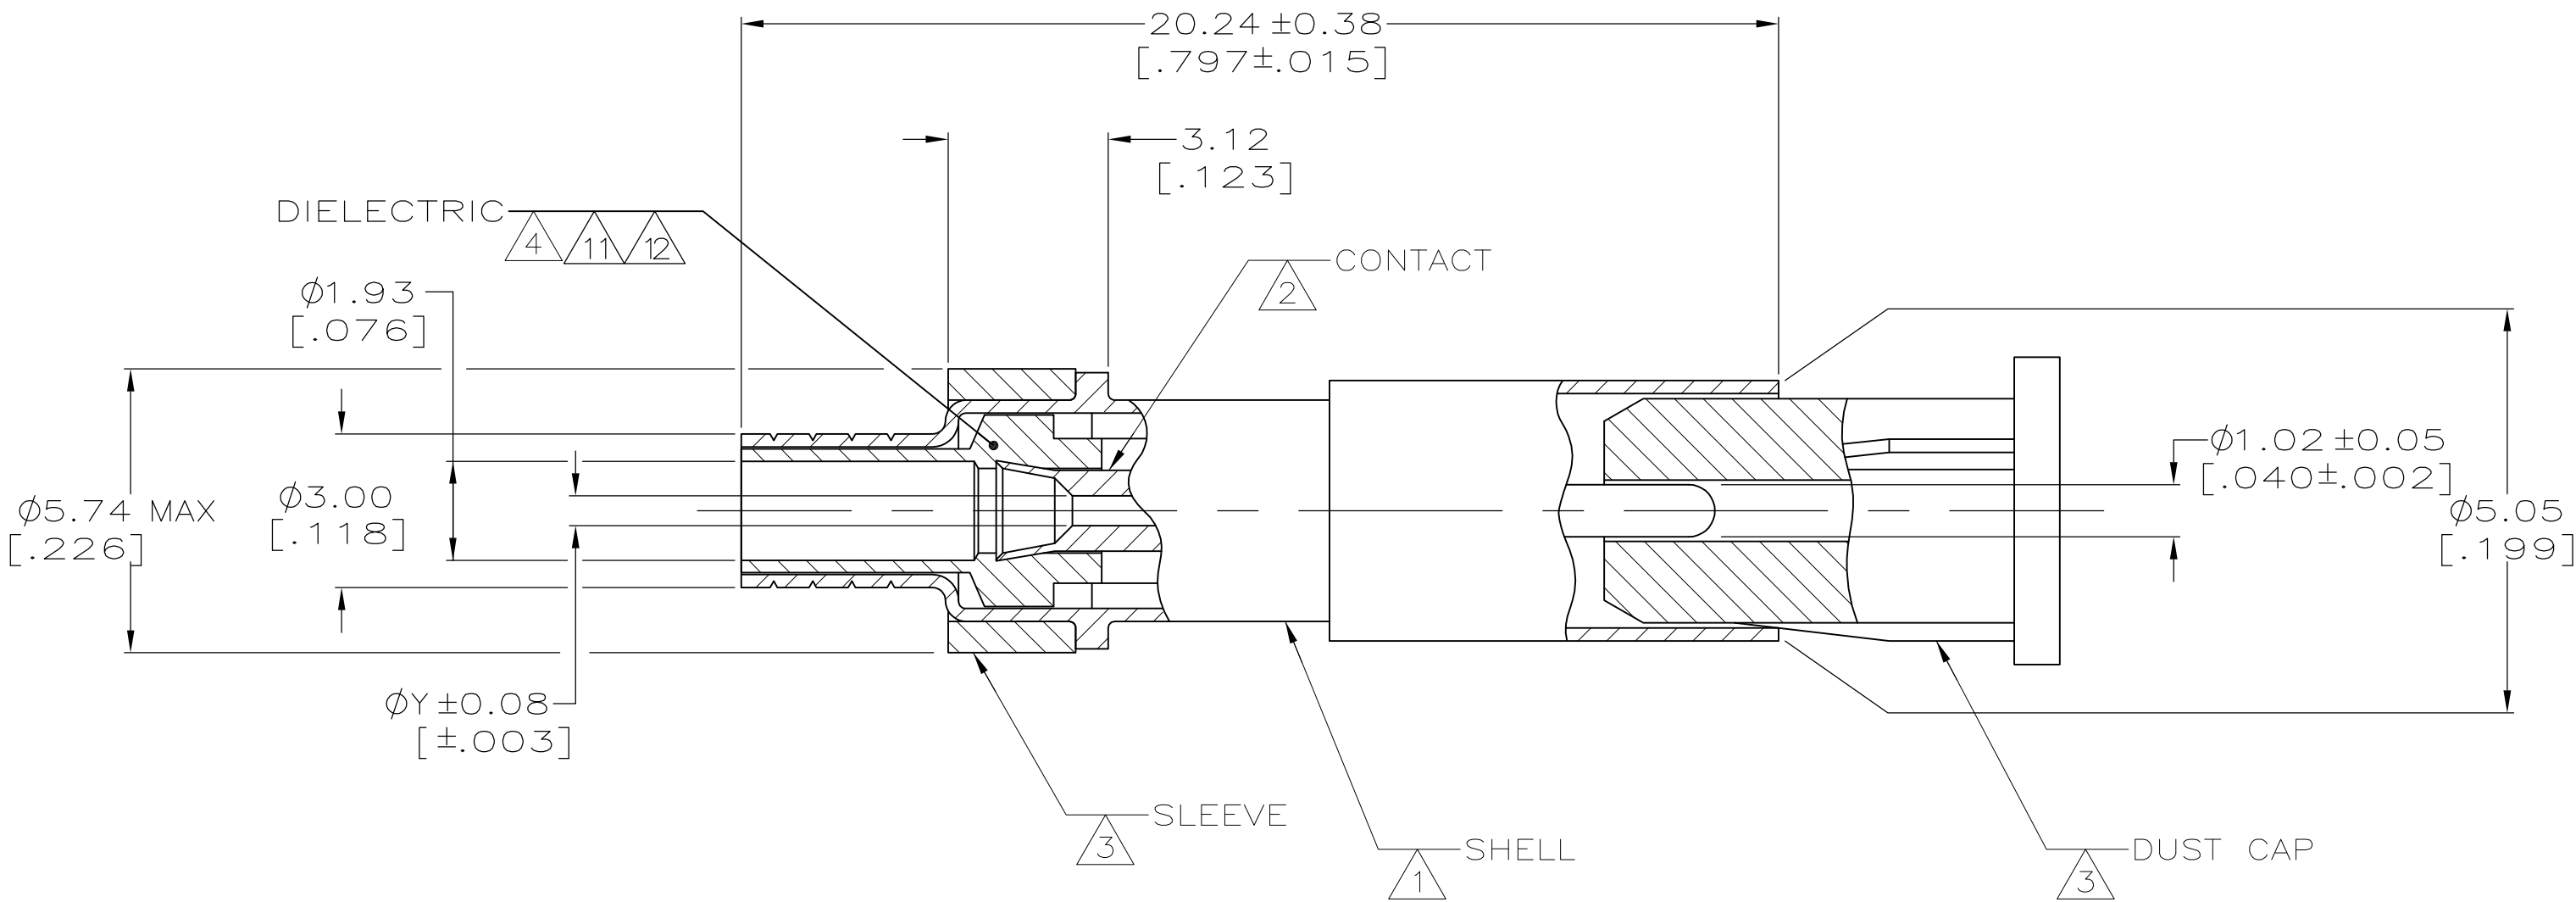

OBSOLETE	5	5	.034 OUNCES	—	—	0.81[.032]	—	—	—	1-201144-8
	—	—	1.65 GRAMS MAX	8	45368-2	—	9-328666-3	201142-2	201144-1	1-201144-1
12 OBSOLETE	6	6	.034 OUNCES	—	—	0.81[.032]	—	—	—	201144-7
OBSOLETE	6	6	.034 OUNCES	—	—	0.58[.023]	—	—	—	201144-6
	5	5	.034 OUNCES	—	—	0.81[.032]	—	—	—	201144-5
	5	5	.034 OUNCES	—	—	1.07[.042]	—	—	—	201144-3
	5	6	.034 OUNCES	—	—	0.58[.023]	—	—	—	201144-1
CONTACT PLATING	SHELL PLATING	WEIGHT	CABLE OR WIRE SIZE	CRIMP TOOL	Y	3 FERRULE QTY=1	2 SPRING RETENTION QTY=1	1 SOCKET ASSY QTY=1	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± 0.20[.008]

4 PLC ± -

ANGLES ± -

FINISH -

DWN J. LIPPERT 18 DEC 89

CHK M. SNEED 22 FEB 90

APVD B. ADAMS 22 FEB 90

NAME

PRODUCT SPEC 108-12021

APPLICATION SPEC

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

WEIGHT 0

A100779C=201144

CUSTOMER DRAWING

SCALE 8:1

SHEET 1 OF 1

REV AV3

TE Connectivity

SOCKET, MINIATURE SERIES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[201144-5](#)