

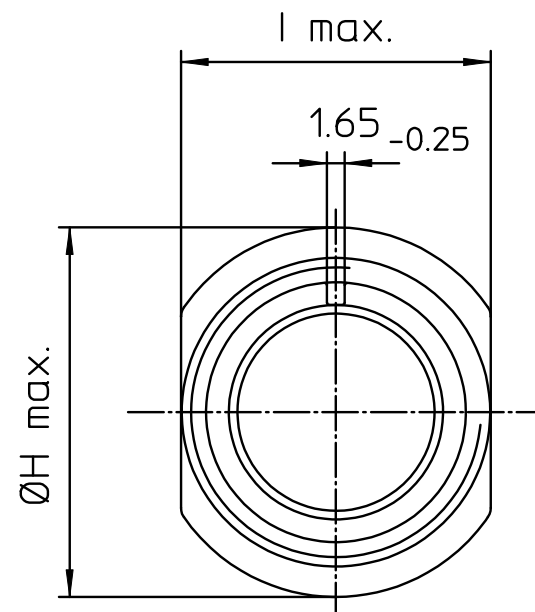


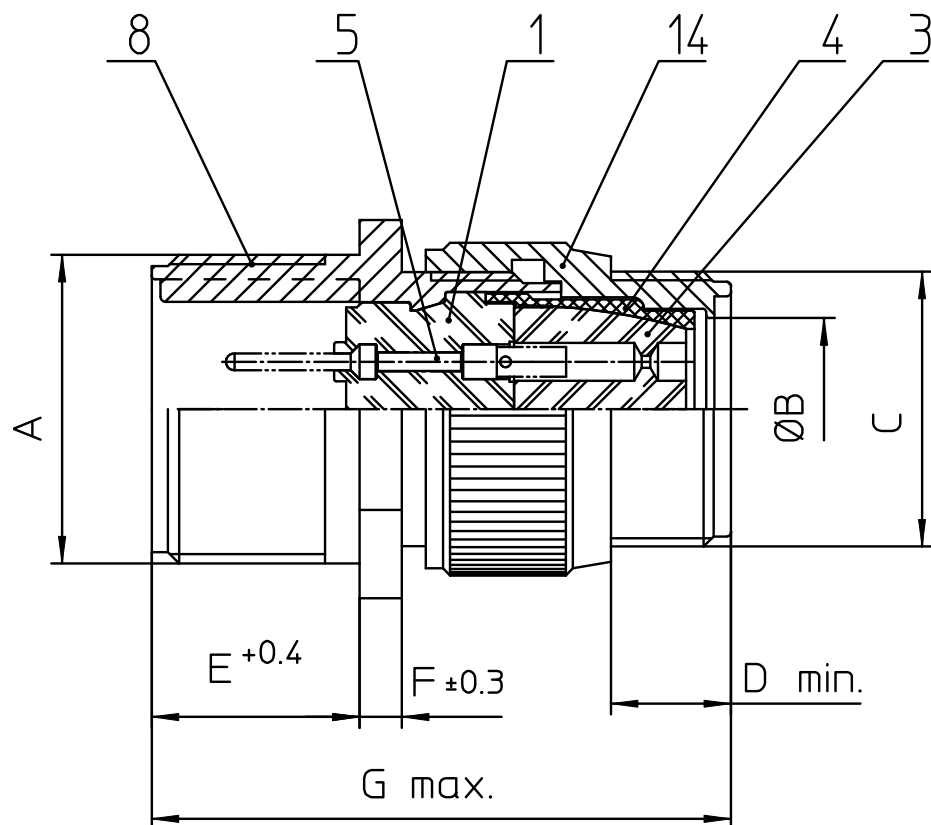

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 2-18NS-2A         |
| B   | 32.5              |
| C   | 1 3/4-18NS-2A     |
| D   | 11                |
| E   | 22.2              |
| F   | 4                 |
| G   | 62                |
| H   | 56.8              |
| I   | 51.1              |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT/ CONTACT PIN           |
| 8   | DOSENGEHÄUSE / SHELL                |
| 14  | F-ENDGEHÄUSE / F-ENDBELL            |

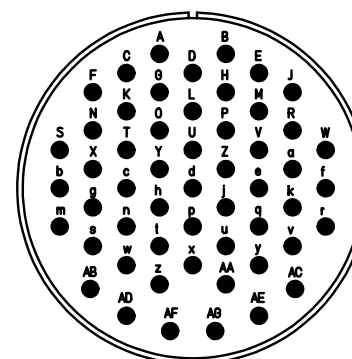

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                         |                                                  |
|-------------------------|--------------------------------------------------|
| Material Specification: |                                                  |
| Shell Material:         | Aluminium alloy                                  |
| Shell Plating:          | Olive drab chromate coating over cadmium plating |
| Insulator Material:     | Neoprene                                         |
| Contact Material:       | Copper alloy                                     |
| Contact Plating:        | Hard silver                                      |

|                                                                                                                                                                                                     |  |                                                                                                                           |                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------|---------------------------|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                                   |  | drawing for<br>CUSTOMER                                                                                                   |                           |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GmbH<br/>D - 71384 Weinstadt/Germany</small> |  | description <b>CA3101F32A10P-F80</b><br>Cable connecting plug<br>Endbell for flex tube<br>AWG Crimp / Pin / Layout: 32A10 |                           |
| © All rights reserved. Reproduction or issue to third in any form<br>whenever is only permitted with written authorization of ITT Cannon                                                            |  | page<br>1/1                                                                                                               | revision<br>969 9. Apr 20 |