

5


4

3


2

1

Edge mark on first conductor

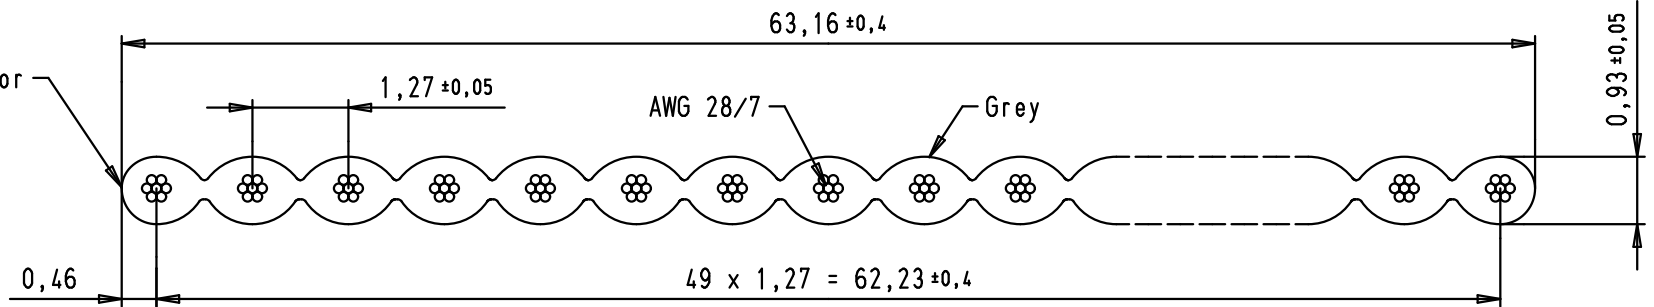

Wire _____ Tinned copper
 Gauge _____ AWG 28/7 0,089 mm²
 Voltage rating _____ 300 Vr.m.s
 Current rating _____ 2,1A at 25°C
 Capacity unbalanced _____ 45,9 pF/m at 1 MHz
 Impedance unbalanced _____ 105 Ω
 Propagation delay _____ 4,9 ns/m nominal
 Insulation material _____ PVC
 Temperature rating _____ -20°C (operating)
 _____ -30°C (static) to +105°C
 Flammability rating _____ Flame retardant VW1
 Insulation resistance _____ 100 MΩ/km
 Approval _____ UL AWM style 2651

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 flat cable 50 poles	Maßstab/ Scale 10:1
			Detail.	20/10/05	JMDR			
			Insp.					
EC01360	19/02/10	SC	Stand.					
09 18 050 7004	100 m (328 feet)		34400	18/09/07	PK		TB 09 18 050 700X	Blatt/ Page 1 / 1
09 18 050 7001	30,48 m (100 feet)		33246	20/10/05	JMDR			
Part number	Length per reel		Mod.	Dat.	Name			
			HARTING EURL F-95972 Paris					

D

C

B

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09180507001](#) [09180507004](#)