






FCIconnect.com

Copyright FCI


PRODUCT NUMBER
73475-101

NOTE 5



NOTES

- ① MATERIAL: LCP, 30% GLASS FILLED, FLAME RETARDANT ACC. TO UL 94-V0 COLOR: NATURAL
- ② - WHEN USED WITH GUIDE PIN, HOLE DIAMETER TO BE 3.25 ± 0.10 AND UNPLATED
- WHEN USED WITH STR. SCREW-TO-BOARD HIGH POWER INSERT, HOLE DIAMETER TO BE 3.25 ± 0.10 AND PLATED WITH 5.00 MIN. PAD DIAMETER.
- WHEN USED WITH A PLUG/PLUG HIGH POWER COUPLER OR A RECEPTACLE/RECEPTACLE COAX COUPLER, HOLE DIAMETER TO BE $6.00 \pm 0.10 / -0.00$ AND UNPLATED.
3. MAX. FLASH 0.1MM
4. LEAST MATERIAL CONDITION ACC. TO ANSI Y14.5

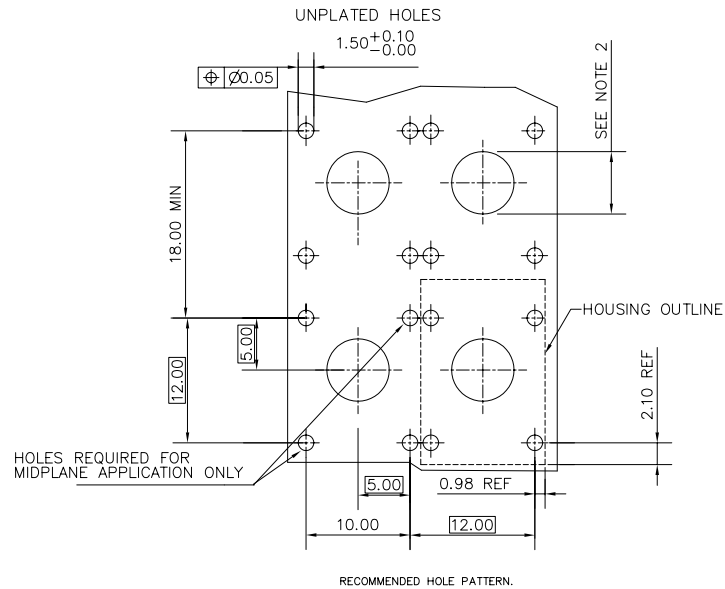

- ⑤. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION
6. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
7. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection MM	product family METRAL (tm)
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
A	V70831	MDF	5/19/97		angles	.0±.3	HYBRID HEADER HOUSING-12MM
B	V71431	MDF	10/2/97		linear	.00±.13	
C	V00024	JWS	1/28/00	0'±2'		.000±.0051	
D	M05-0200	MHT	9/21/05	dr	M.FETROW	5/19/97	dwg no 73475 sheet 1 of 1 size A3
E	M06-0277	MHT	7/22/06	enrg	C.PENDLETON	5/17/97	
				chr	C.PENDLETON	5/17/97	
				appd	C.PENDLETON	5/17/97	type Product Customer Drawing
sheet index	revision sheet	E	1				

form: A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[73475-101LF](#)